# Æther Link

ORDER CODE: AETHERLINK




| IP RATING | WEIGHT | |
|---|---|---|
| **IP66 for outdoor installations** | **0,4kg / 0.88lbs** | |

## MAIN FEATURES

- Single universe wireless CRMX transceiver unit
- Easy setup via one-button interface
- IP66 rated for exterior installation
- Power IN/Out and DMX In/Out through moulded IP67 cables

Downloaded on 07/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

# TECHNICAL SPECIFICATIONS

## CONTROL

| | |
|---|---|
| Supported Protocols: | DMX512, RDM, CRMX |
| DMX channels: | 512ch |
| RDM: | for remote addressing and parameter configuration |

## CONNECTIONS

| | |
|---|---|
| Power connection: | 15 cm, IP67 moulded IP power IN/ OUT connectors |
| Signal connection: | 20 cm, IP67 moulded IP signal IN/ OUT connectors |
| Wireless Connection: | integrated LumenRadio TiMo FX RDM - CRMX and W-DMX compatible |
| Transmission range: | up to 80 meters in open field |

## PHYSICAL

| | |
|---|---|
| IP rating: | IP66 for outdoor installations |
| Housing: | Weatherproof IP66 construction with die-cast aluminium alloy, scratch-resistant C5M Marine Grade paint (as standard) |
| Finish: | black |
| Operating temperature: | Ta -20 to +45 °C (-4 to +113 °F) |
| Dimensions (WxHxD): | 154x33x54mm |
| Weight: | 0,4kg |

## ELECTRONICS

| | |
|---|---|
| Firmware upgrade with: | via DMX with UPBOXPRO (not included) |

## ELECTRICAL

| | |
|---|---|
| Mains power supply: | 100-240V - 50/60Hz |
| Max power consumption (230V): | 2W |
| Standby power: | 1,5 W |

## INSTALLATION

| | |
|---|---|
| Suspension and fixing: | - holes for fixing to surfaces |

## CERTIFICATIONS / REPORTS

| | |
|---|---|
| Compliance: | CE, RCM |

## BOX CONTENT

1 x AETHERLINK

1 x 0,3 meters 3G1mmq power cable (BARE END - IP connection adapter)

1 x 5p XLR - IP connection female adapter

1 x 5p XLR - IP connection male adapter

Downloaded on 07/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

## ACCESSORIES & RELATED PRODUCTS



**AWEXAC2L03**
Extension IP67 power cable, IPpowercon-F -> IPpowercon-M, 3m



**AWEXAC2L05**
Extension IP67 power cable, IPpowercon-F -> IPpowercon-M, 5m



**AWEXAC2L10**
Extension IP67 power cable, IPpowercon-F -> IPpowercon-M, 10m



**AWEXAC2L20**
Extension IP67 power cable, IPpowercon-F -> IPpowercon-M, 20m



**AWEXDC2L03**
Extension IP67 signal cable, IPdataCON-F -> IPdataCON-M, 3m



**AWEXDC2L05**
Extension IP67 signal cable, IPdataCON-F -> IPdataCON-M, 5m



**AWEXDC2L10**
Extension IP67 signal cable, IPdataCON-F -> IPdataCON-M, 10m



**AWEXDC2L20**
Extension IP67 signal cable, IPdataCON-F -> IPdataCON-M, 20m



**PLYPC3010E73D**
Y splitter power cable 3x1.0 mm2, IP67 connectors (1 IN + 2 OUT), 80 cm lenght



**AWEXDC1221ADP**
Signal adapter kit from AWEXDC1 series to AWEXDC2 series and vice versa



**AWEXAC12ADP**
Power adapter from AWEXAC1 cable series to AWEXAC2 cable series



**AWEXAC1L03**
IP67 power extension cable for outdoor architectural projectors, L.03 m



**AWEXAC1L05**
IP67 power extension cable for outdoor architectural projectors, L.05 m



**AWEXAC1L10**
IP67 power extension cable for outdoor architectural projectors, L.10 m



**AWEXAC1L20**
IP67 power extension cable for outdoor architectural projectors, L.2 0m



**AWEXDC1L03**
IP67 DMX extension cable for outdoor architectural projectors, L.03 m



**AWEXDC1L05**
IP67 DMX extension cable for outdoor architectural projectors, L.05 m



**AWEXDC1L10**
IP67 DMX extension cable for outdoor architectural projectors, L.10 m



**AWEXDC1L20**
IP67 DMX extension cable for outdoor architectural projectors, L.20 m




**AETHERBOXONE**
IP65 1x universe CRMX transceiver, DMX, Ethernet protocols, Wi-Fi, Bluetooth, battery-ready, POE



**AETHERBOX**
IP65 1 universe CRMX transceiver, DMX and Ethernet protocols, Wi-Fi, Bluetooth and battery ready

Downloaded on 07/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

## TECHNICAL DRAWINGS

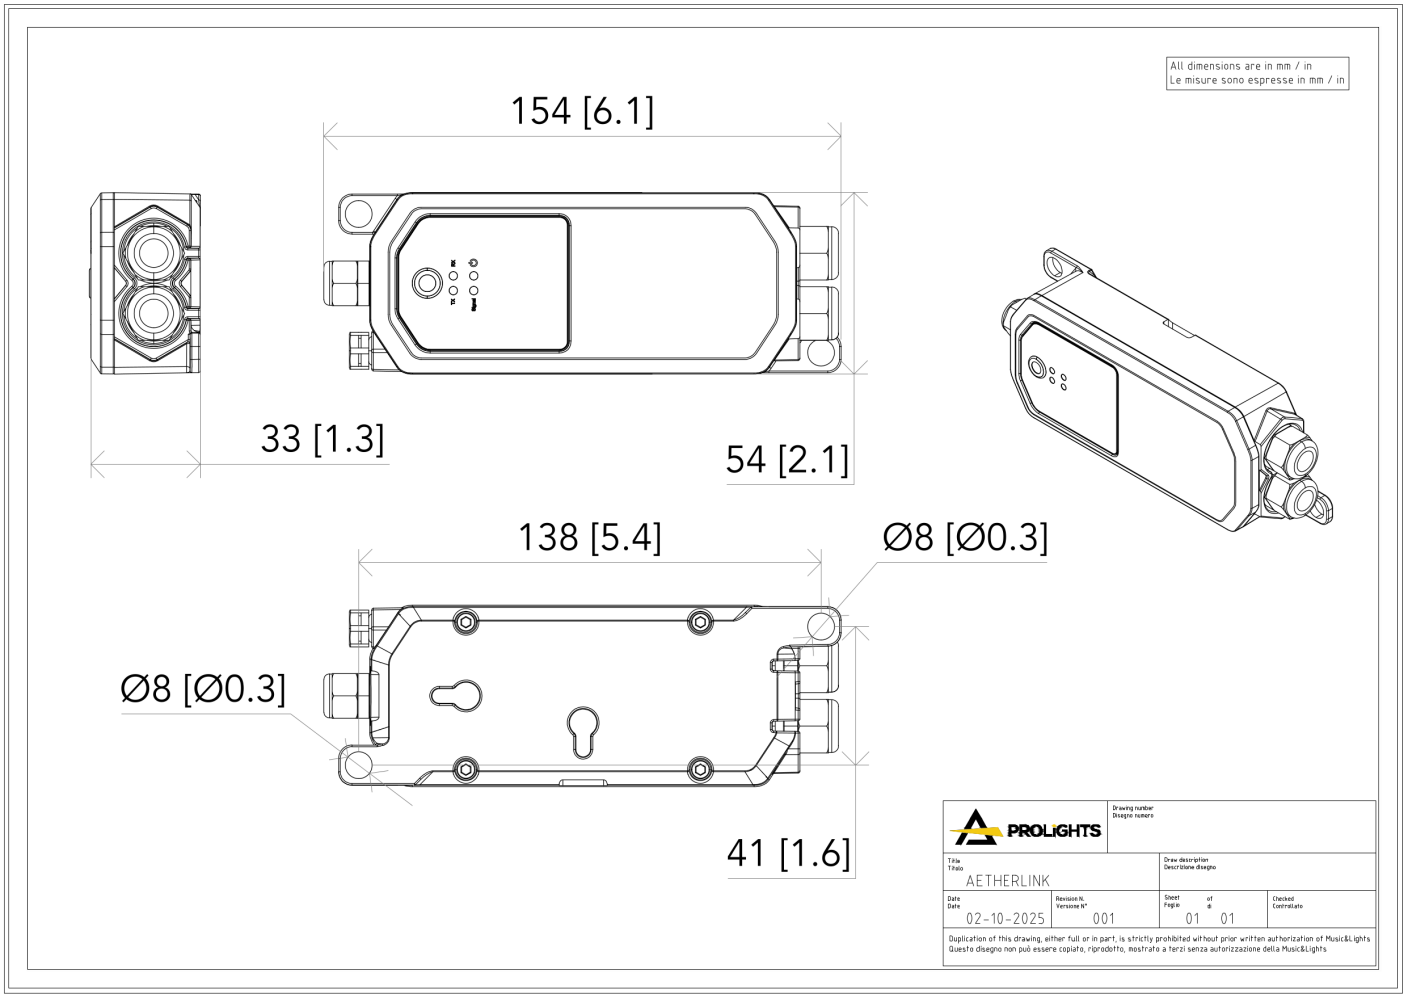


MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594

Downloaded on 07/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice