Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

ArcPod 15VW

PROLiGHTS

ORDER CODE: ARCPOD15VW



Source

15x10W Warm White + Cold White LEDs

IP rating

IP66 for outdoor installations

Weight

6,3kg / 13.89lbs

ArcPod 15VW is a compact exterior wash fixture, featuring high-intensity light despite its small size. The unit is equipped with 15x10W VW LEDs, delivering an exceptional output over than 15'000 lumens and a high quality white reproduction across CCT. The slim sizing, as well as the wide range of available optics, makes the **ArcPod** 15VW an incredibly flexible architectural fixture to complement the bigger versions in large outdoor installs as accent light or for smaller-sized projects.

MAIN FEATURES

- Tilt adjustment and multiple lens options for fine focusing
- 15x10W VW LEDs
- Compact form factor and fan-free design

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

ArcPod 15VW

PROLIGHTS

ORDER CODE: ARCPOD15VW

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

- Source: 15x10W Warm White + Cold White LEDs
- Luminous flux: (15°) 8'884 lm; (15°+20°) 7'811 lm; (15°+30°) 7'846 lm; (15°+40°) 7'935 lm; (15°+60°) 7'902 lm; (15°+80°) 7'937 lm; (15° +10°x60°) 15'410 lm; (15°+30°x60°) 8667 @Full
- Lux: (15°) 7'769 lx; (15°+20°) 1'360 lx; (15°+30°) 822 lx: (15°+40°) 409 lx; (15°+60°) 292 lx; (15°+80°) 205 lx; (15°+10°x60°) 1'126 lx; (15° +30°x60°) 517lx @5 m full
- CRI: 81,3 @ WW; 83.9 @ CW; 86.5 @ full
- Source life expectancy: > 50.000 hrs (L70B10 @Ta 25° C / 77° F)

DYNAMIC EFFECTS

- Static mode: selection of static colour

MOVEMENT

- Tilt: 0 - 130° with manual adjustment

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Strobe / shutter: 1 ~ 30 Hz, electronic
- Selectable PWM: 600 to 25,000 Hz (selectable steps)
- Firmware upgrade with: via DMX with UPBOXPRO/UPBOX1 (not included)

CONNECTIONS

- Power connection: 1,8 m moulded IP power IN/OUT connectors
- Signal connection: 1,8 m moulded IP signal IN/OUT connectors
- Adaptors: XLR and BARE END 16A adaptors included

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 150W
- Output (at 230V): 11 units on a single power line
- Power factor: >0,97

OPTICS

- Lens diameter: 36mm
- Additional optics: see available accessories

COLOUR SYSTEM

- CCT: CCT control through dedicated DMX channel
- White presets: 2.700 K ~ 6.500K
- Colour wheel: virtual colour wheel with macros
- Macros: several pre-built macros with adjustable speed

CONTROL

- Supported Protocols: DMX512, RDM
- DMX channels: 1 / 2 / 3 / 5 / 11ch
- RDM: for remote addressing and parameter configuration
- Display: user interface through DATAMASTER external coder (not included)
- Master/Slave: for synchronised operation of more units linked in a chain

PHYSICAL

- IP rating: IP66 for outdoor installations
- IK rating: IK08 impact rating
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: basalt grey (RAL 7012), also available with C5-M marine grade coating
- Operating temperature: Ta -20 to +45 °C (-4 to +113 °F)
- Dimensions (WxHxD): 307x259x83mm
- Weight: 6,3kg

CERTIFICATIONS / REPORTS

- Compliance: CE, UKCA, RCM, cTUVus, FCC

BOX CONTENT

- 1 x ARCPOD15VW
- 1 x 0,28 meters 3G1,5mmq power cable (BARE END - IP connection adapter)
- 1 x 5p XLR - IP connection female adapter
- 1 x 5p XLR - IP connection male adapter

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

ArcPod 15VW

ORDER CODE: **ARCPOD15VW**

ACCESSORIES & RELATED PRODUCTS



AETHERLINK
IP66 rated 1 Universe CRMX wireless transceiver for permanent outdoor installation



AWEXDC1221ADP
Signal adapter kit from AWEXDC1 series to AWEXDC2 series and vice versa



AWEXAC12ADP
Power adapter from AWEXAC1 cable series to AWEXAC2 cable series



RSR0630B
Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black



C6002B
Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black

A15QFILTER20
20° symmetric light diffusion filter for ARCPOD15Q, 11,4x18,6 cm

A15QFILTER30
30° symmetric light diffusion filter for ARCPOD15Q, 11,4x18,6 cm

A15QFILTER40
40° symmetric light diffusion filter for ARCPOD15Q, 11,4x18,6 cm

A15QFILTER60
60° symmetric light diffusion filter for ARCPOD15Q, 11,4x18,6 cm

A15QFILTER80
80° symmetric light diffusion filter for ARCPOD15Q, 11,4x18,6 cm

A15QFILTER1060
10°x60° (VxH) asymmetric light diffusion filter for ARCPOD15Q, 11,4x18,6 cm


A15QFILTER3060
30°x60° (VxH) asymmetric light diffusion filter for ARCPOD15Q, 11,4x18,6 cm

A15QFILTER6010
60°x10° (VxH) asymmetric light diffusion filter for ARCPOD15Q, 11,4x18,6 cm

A15QFILTER6030
60°x30° (VxH) asymmetric light diffusion filter for ARCPOD15Q, 11,4x18,6 cm



S27QLENS10
10° lens for SOLAR27, ARCPOD27, SOLAR48, ARCPOD48, ARCPOD15 and ARCPOD96 series



S27QLENS15
15° lens for SOLAR27, ARCPOD27, SOLAR48, ARCPOD48, ARCPOD15 and ARCPOD96 series




S27QLENS25
25° lens for SOLAR27, ARCPOD27, SOLAR48, ARCPOD48, ARCPOD15 and ARCPOD96 series



S27QLENS45
45° lens for SOLAR27, ARCPOD27, SOLAR48, ARCPOD48, ARCPOD15 and ARCPOD96 series



A15QSNOOT
Snoot for ARCPOD15Q



A15QBD
Black barn door with 4 directional flaps to adjust the light beam, ARCPOD15Q



DATAMASTER
RDM/DMX tool,cable tester, 5p XLR connectors,pouch, charging cable, XLR adapters



AWEXAC1L03
IP67 power extension cable for outdoor architectural projectors, L.03 m

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

ArcPod 15VW

ORDER CODE: **ARCPOD15VW**

ACCESSORIES & RELATED PRODUCTS



AWEXAC1L05

IP67 power extension cable for outdoor architectural projectors, L.05 m



AWEXAC1L10

IP67 power extension cable for outdoor architectural projectors, L.10 m



AWEXAC1L20

IP67 power extension cable for outdoor architectural projectors, L.2 0m



AWEXDC1L03

IP67 DMX extension cable for outdoor architectural projectors, L.03 m



AWEXDC1L05

IP67 DMX extension cable for outdoor architectural projectors, L.05 m



AWEXDC1L10

IP67 DMX extension cable for outdoor architectural projectors, L.10 m



AWEXDC1L20

IP67 DMX extension cable for outdoor architectural projectors, L.20 m



UPBOXPRO

Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector


Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

ArcPod 15VW

ORDER CODE: **ARCPOD15VW**

PHOTOMETRICS

Full On - 15°

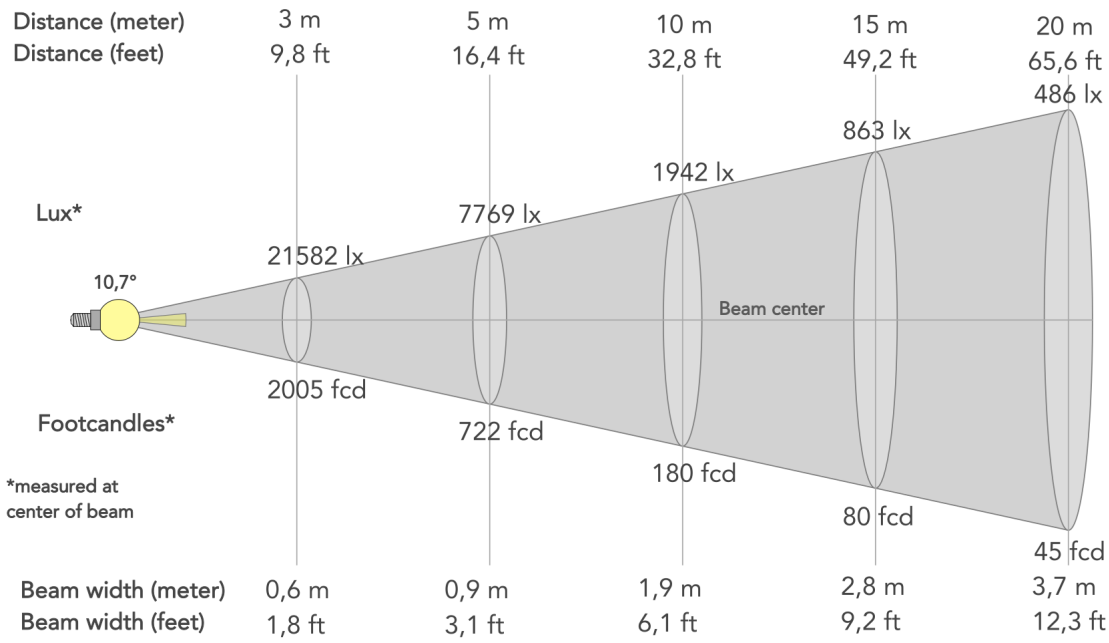

Beam angle (50%): **10.7°**	Field angle (10%): **19.6°**	Cut-off angle (2.5%): **27.1°**

MUSIC & LIGHTS S.r.l. | Via A. Olivetti, snc 04026 - Minturno (LT) ITALY | info@prolights.it Tel: +39 0771 72190 | **prolights.it** VAT No. IT 02057590594