Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

DigiDriver IP

ORDER CODE: DIGIDRIVERIP



IP rating

IP65 for temporary outdoor use

Weight

4.5kg / 9.92lbs

DigiDriver IP is a driver which provides power and processing to the DigiStrip IP. It has 2 outputs and can control up to 20 DigiStrip IP100 (10 DigiStrip IP100 for each port) and 40 DigiStrip IP50 (20 DigiStrip IP50 for each port) - each offering the control of up to 2.000 pixels in a one rack unit, offering 20 DMX universes and 550 W of power in and out. DigiDriver IP cannot control DigiStrip, DigiTube and DigiTile. DigiDriver IP is compatible with Art-Net, Kling-Net and sACN protocols and runs signal and power over a 4 pole XLR cable that allow wiring of units in a chain. The user interface consists of a black OLED display for settings, protocol selection, network address and test patterns. IP 65 rating allows for the usage at outdoor events so humidity and rain are no longer a worry.

MAIN FEATURES

- Art-Net, Kling-Net and sACN control protocol supported
- Power and signal output up to 20 DigiStrip IP100 or 40 DigiStrip IP50
- IP65 for outdoor events
- Firmware update with NET cable without interface

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

DigiDriver IP

PROLIGHTS

ORDER CODE: DIGIDRIVERIP

TECHNICAL SPECIFICATIONS

CONNECTIONS

- Power connection: Seetronic powerCON waterproof IN/OUT connectors
- Signal connection: 2xRJ45 and 4p out

PHYSICAL

- IP rating: IP65 for temporary outdoor use
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: black
- Operating temperature: Ta -20 to +45 °C (-4 to +113 °F)
- Dimensions (WxHxD): 483x84x250mm
- Weight: 4.5kg

BOX CONTENT

- 1 x DIGIDRIVERIP
- 1 x 1,5 meters power cable (BARE END - SEETRONIC IP65 power connector)

CONTROL

- Supported Protocols: Art-Net, sACN, Kling-Net
- Control units: 20 x DIGISTRIPIP100 or 40 x DIGISTRIPIP50
- Art-Net channels: 20x512ch
- Pixel control: pixel2pixel control
- Display: Graphic User Interface

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 550W
- Output (at 230V): 5 units on a single power line

INSTALLATION

- Suspension and fixing: any position with quick-lock Omega brackets
- Rack mount: 2U 19" standard rack

CERTIFICATIONS / REPORTS

- Compliance: CE, UKCA

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

DigiDriver IP

ORDER CODE: **DIGIDRIVERIP**

ACCESSORIES & RELATED PRODUCTS



OS25PLUS
Quick-lock omega bracket, M12 hole



C6002B
Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black




RSR0630B
Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black

DIGICABLEIP
DIGI IP series signal 4-pin cable

DIGILINKIP
Digi IP series signal 4-pin cable

TECHNICAL DRAWINGS

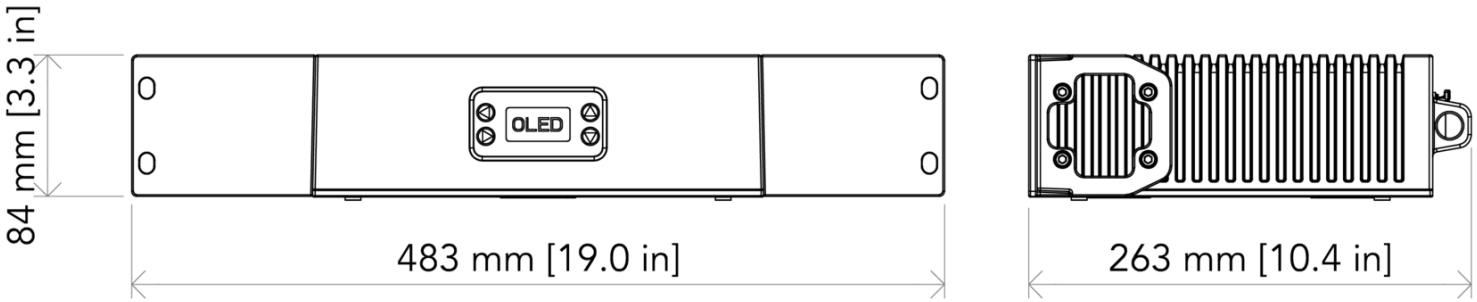

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594