
DigiStrip IP50

ORDER CODE: **DIGISTRIPIP50**

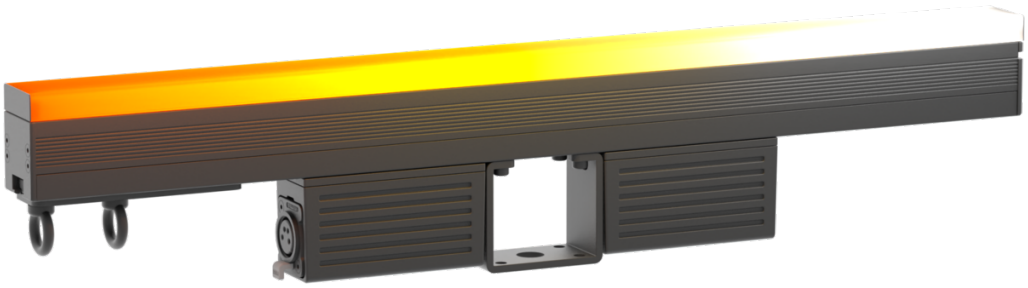

SOURCE

50x0,25W RGB LEDs

IP RATING

IP65 for temporary outdoor use

WEIGHT

1,35kg / 2.98lbs

LUMINOUS FLUX (MAX)

341 lm

Downloaded on 10/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

Source:	50x0,25W RGB LEDs
Luminous flux:	without cover: 341 lm - black cover: 45 lm - flat white cover: 173 lm - dome white cover: 220 @Full
Lux:	without cover: 5 lx - black cover: 1 lx - flat white cover: 2 lx - dome white cover: 1lx @5 m full
Other:	view angle 100° - driver chip MBI 5043
Source life expectancy:	> 50.000 h

OPTICS

Pixel pitch:	10mm
Additional optics:	black cover and white dome cover (included)
Other:	flat white cover (included)

CONNECTIONS

Signal connection:	Seetronic XLR 4p IN/OUT connectors

CONTROL

Supported Protocols:	Art-Net, sACN, Kling-Net
Control units:	40 pcs power & signal under 1 pc DIGIDRIVERIP
Art-Net channels:	150ch
Pixel control:	pixel2pixel control

ELECTRICAL

Mains power supply:	DC 48V
Max power consumption (230V):	12,5W

CERTIFICATIONS / REPORTS

Compliance:	CE, UKCA

PHYSICAL

IP rating:	IP65 for temporary outdoor use
Housing:	Sturdy aluminium profile
Finish:	black
Dimensions (WxHxD):	500x33x114mm
Weight:	1,35kg

INSTALLATION

Suspension and fixing:	- bracket for truss rigging and hardware for connection of more units
Hardware on-board:	on board mechanics for modular assembly of multiple fixtures

BOX CONTENT

1 x DIGISTRIPIP50

1 x flat black cover

1 x white dome cover

ACCESSORIES & RELATED PRODUCTS




DIGIDRIVERIP

Master driver for Digi IP series, Art-Net, Kling-Net, IP65, 550W,

DIGILINKIP


Digi IP series signal 4-pin cable

TECHNICAL DRAWINGS

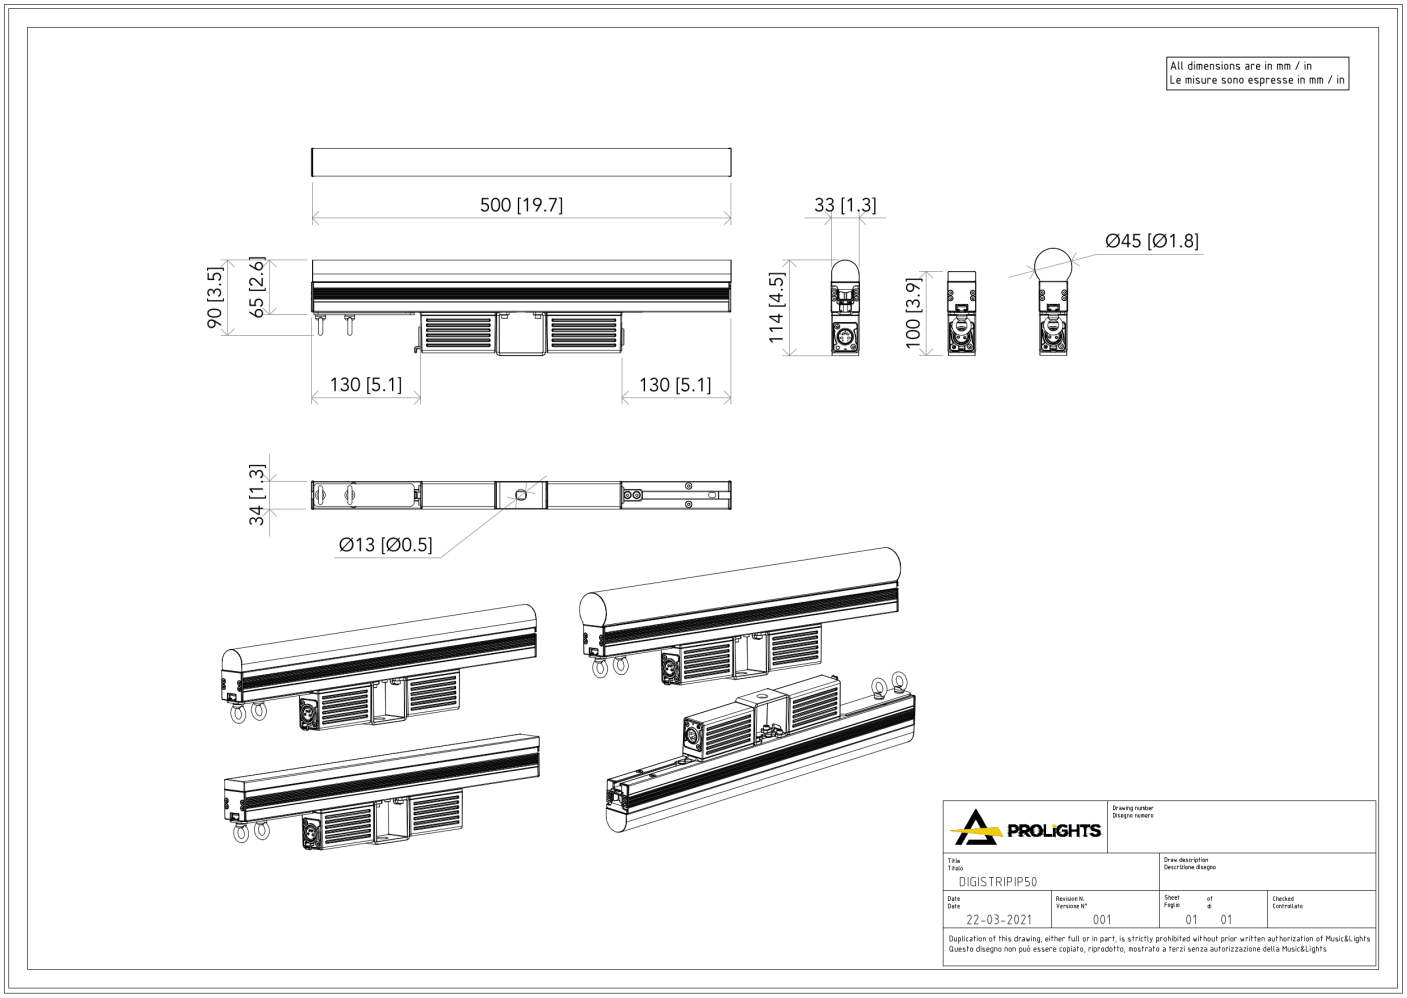

PHOTOMETRICS

Full On - No Diffuser

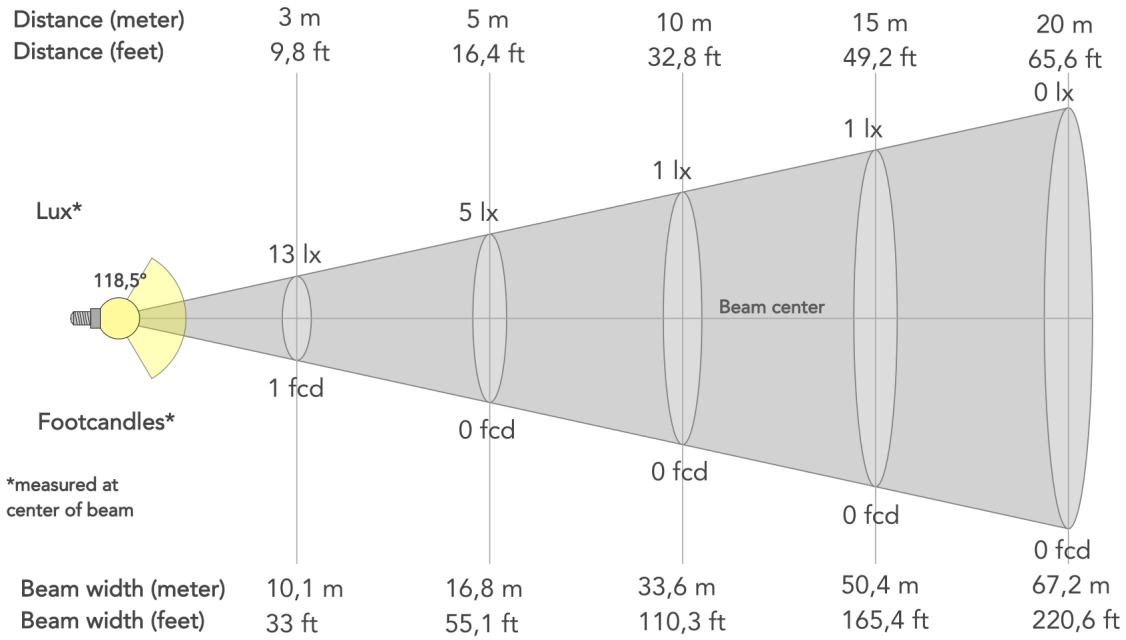

Beam angle (50%): **118.5°**	Field angle (10%): **155.3°**	Cut-off angle (2.5%): **162.9°**