EclExpo Flood150VW

ORDER CODE: ECLEXPOFL150VWBK



SOURCE	IP RATING	WEIGHT
150W Variable White LED	**IP20**	**3,2kg / 7.05lbs**

LUMINOUS FLUX (MAX)	CRI
9'733 lm	**95,1 @2.700 K**

Downloaded on 07/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

Source:	150W Variable White LED
Source CCT:	2.700 K - 6.500 KK
Luminous flux:	@2.700K 6'956 lm; @6.500K 9'733 lm; @full 8'598
Lux:	@2.700K 72 lx; @6.500K 99 lx; @full 91lx @5 m
CRI:	95,1 @2.700 K; 95,3 @6.500 K; 94.4 @full
R9:	95 @2.700 K; 88.4 @6.500 K; 80,7 @full
TLCI:	97 @2.700 K; 96 @6.500 K; 98 @full
TM30 Rf:	> 94 @2.700 K; > 90 @6.500 K; > 92 @full
TM30 Rg:	< 101 @2.700 K; < 99 @6.500 K; < 102 @full
Source life expectancy:	> 30.000 hrs (L70B10 @Ta 25° C / 77° F)

OPTICS

Optics:	asymmetrical beam reflector in pure aluminium 99,6%
Beam angle:	(H) 100° x (V) 60°

COLOUR SYSTEM

Colour mixing:	tunable white
CCT:	CCT control through dedicated DMX channel
White presets:	2.700 K - 6.500K
Colour wheel:	built-in white presets

DYNAMIC EFFECTS

Control Resolution:	16-bit dimmer control
Static mode:	selection of static dimmer and color temperature
Manual mode:	manual adjustment of intensity and CT from knob
Auto mode:	built-in programs with execution speed adjustment

CONTROL

Supported Protocols:	DMX512, RDM, CRMX (optional)
DMX channels:	1 / 2 / 3 / 5 / 11ch
RDM:	for remote addressing and parameter configuration
Display:	Graphic User Interface
Stand Alone:	2 rotatory knobs
Master/Slave:	for synchronised operation of more units linked in a chain

ELECTRONICS

Dimmer:	linear 0 - 100% electronic dimmer
Dimmer curves:	4 selectable dimming modes available
Strobe / shutter:	1 - 30 Hz, electronic
Selectable PWM:	600 to 25,000 Hz (selectable steps)
Firmware upgrade with:	via DMX with UPBOXPRO/ UPBOX1 (not included)

CONNECTIONS

Power connection:	Seetronic powerCON TRUE IP65 IN/OUT
Signal connection:	Amphenol XLR 5p IN/OUT connectors
Wireless Connection:	optional LumenRadio TiMo FX RDM - CRMX and W-DMX compatible

Downloaded on 07/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

ELECTRICAL

Mains power supply:	100-240V - 50/60Hz
Max power consumption (230V):	175W
Output (at 230V):	7 units on a single power line
Standby power:	110V (60Hz): 2,5W; 230V (50Hz): 4,5W
Power factor:	> 0,99

PHYSICAL

IP rating:	IP20
Cooling:	forced-air with low-noise fan
Housing:	Sturdy die-cast magnesium body
Finish:	black (RAL 9004)
Operating temperature:	Ta -10 to +45 °C (+14 to +113 °F)
Dimensions (WxHxD):	283x273x176mm
Weight:	3,2kg

INSTALLATION

Suspension and fixing:	bracket for hanging and floor positioning
Other:	see available accessories

CERTIFICATIONS / REPORTS

Compliance:	CE, UKCA, RCM, cTUVus, FCC

BOX CONTENT

1 x ECLEXPOFL150VW

1 x 1,5 meters 3G1,5mmq power cable (BARE END - SEETRONIC POWERCON TRUE1 IP65 power connector)

ACCESSORIES & RELATED PRODUCTS



FCLEXPOFL150
Flight case for 6 pcs of ECLEXPOFL150 series



ECLEXPOFL150FFBK
Filter frame for ECLEXPOFL150, black



ECLEXPOFL150BDBK
Barn door 8 directional flaps to adjust the light beam for ECLEXPOFL150, black



ECLEXPOFL150WKBK
CRMX Timo Fx kit for ECLEXPOFL150, black



UPBOXPRO
Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector




AETHERBOXONE
IP65 1x universe CRMX transceiver, DMX, Ethernet protocols, Wi-Fi, Bluetooth, battery-ready, POE



AETHERBOX
IP65 1 universe CRMX transceiver, DMX and Ethernet protocols, Wi-Fi, Bluetooth and battery ready


Downloaded on 07/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL DRAWINGS

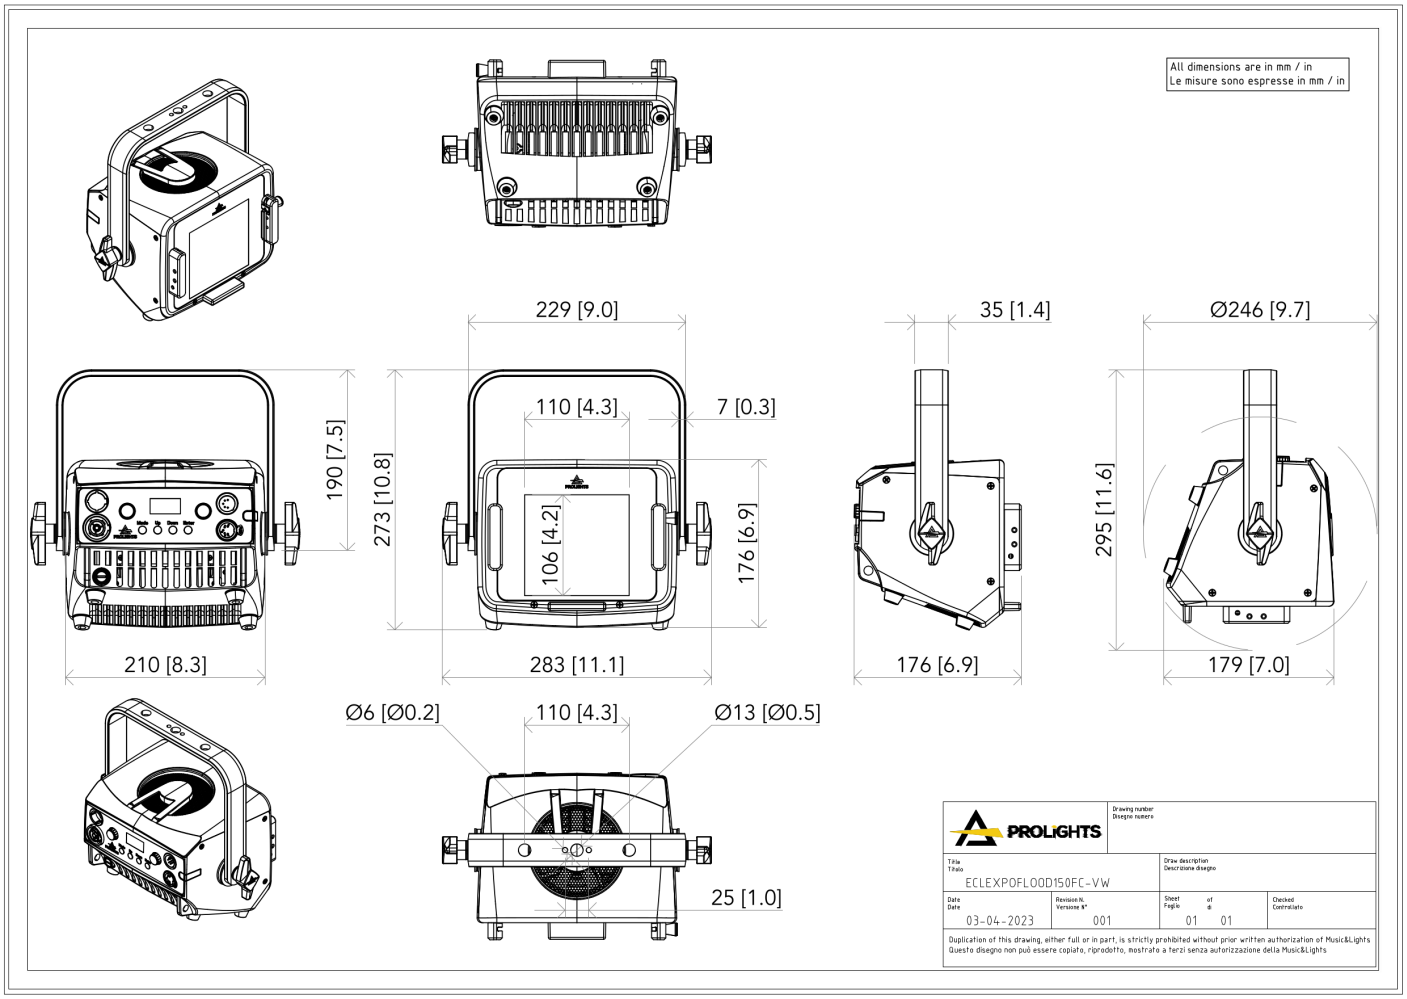

PHOTOMETRICS

Full On - Asymmetric

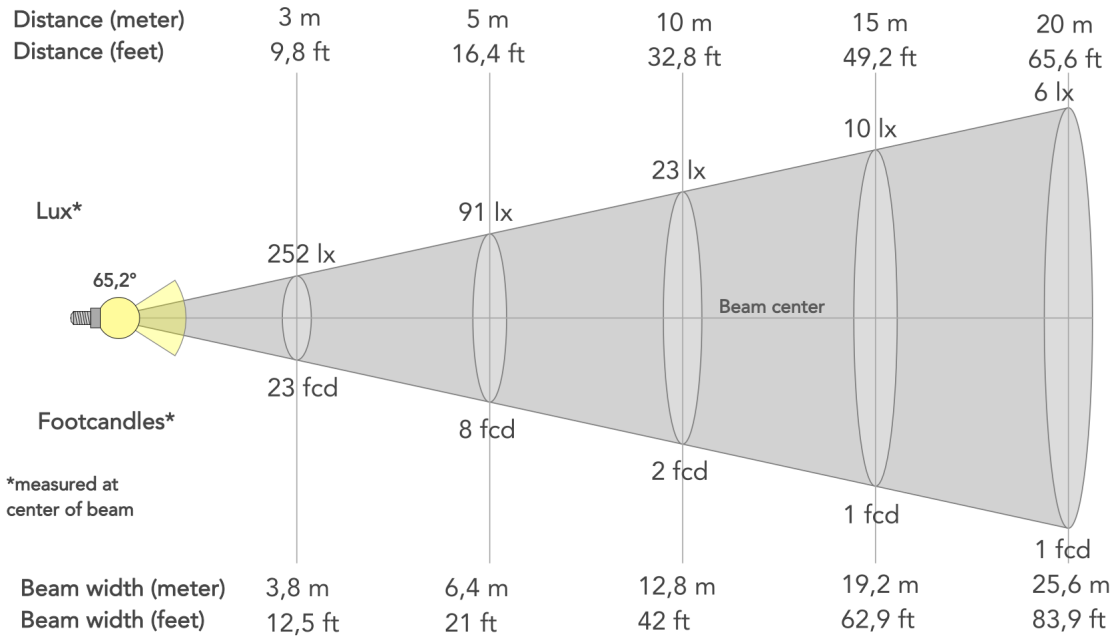

Beam angle (50%): **65.2°**	Field angle (10%): **125.7°**	Cut-off angle (2.5%): **253.4°**