Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

EdgeGo

PROLIGHTS

ORDER CODE: EDGEGO



IP rating

IP20

Weight

4,1kg / 9.04lbs

EdgeGo is a portable lighting console designed for professional use on location or in the studio. It delivers four DMX universes, with output via wireless CRMX, XLR, or Ethernet (Art-Net/sACN). The hardware features a 10.1" touchscreen, 8 RGB encoders, 6 playback faders, and an HDMI output.

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

EdgeGo

PROLIGHTS

ORDER CODE: EDGEGO

EdgeGo operates on V-Mount batteries or a 24 V DC supply, and its lightweight, fan-free chassis is built from reinforced polycarbonate to comply with carry-on luggage standards.

- **Seamless Energy Source Switching:** Automatically switches between power sources without requiring a restart.
- **Extensive Fixture Library:** Includes 30.000+ fixture types and a built-in fixture editor.
- **Advanced Color Management:** Accurate color calculations for up to 9 emitters using xyY data.
- **Comprehensive Color Selection Tools:** Features CIE Picker, HUE Picker, CCT Picker, faders, gels, and mood-based selection.
- **Powerful Playback Engine:** Unlimited simultaneous active cue lists, Tracking and non-tracking modes, Priority-based operation, Automatic synchronization of running effects
- **Customizable Fader Layout:** Configure faders, buttons, encoders, and push encoders to suit your workflow.
- **MagicSheet Interface**: Freely arrange and interact with fixtures, groups, labels, and images.
- **Programmer Tools:** Includes Fanning, Sub-Selection, Highlight, and Blind mode for efficient programming.
- **Dynamic Effect Engine:** Features predefined effects, preset-based effects, and a custom effects editor.

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

EdgeGo

PROLIGHTS

ORDER CODE: EDGEGO

TECHNICAL SPECIFICATIONS

SOFTWARE

- DMX Channels: 2048ch
- DMX universes: 4 DMX universes freely mappable between CRMX, DMX, ArtNet, s-ACN
- Playback Pages: 99 + 1 Template Page
- Memories: 250 Presets per Feature Group, 100 Fixture-Groups
- Max Fixtures: Limited by DMX Channels
- External Control: MIDI trigger. MIDI Timecode, OSC
- Software update: via USB stick or online server (requires internet connection)
- Library update: via USB stick or online server (requires internet connection)

BATTERY

- Battery: 24V compatible with external power supply and V-Mounts batteries (14.4-28.8Vdc) - battery not included

PHYSICAL

- IP rating: IP20
- Cooling: passive, fan-free
- Housing: Sturdy polycarbonate body
- Finish: black
- Operating temperature: Ta 0 to +45 °C (+32 to +113 °F)
- Dimensions (WxHxD): 374x98x356mm
- Weight: 4,1kg

CERTIFICATIONS / REPORTS

- Compliance: CE, RCM, FCC, cTUVus

BOX CONTENT

- 1 x EDGEGO
- 1 x VDE15BEL010
- 2 x AEB2DBA
- 1 x external power supply

CONTROL SURFACE

- On-board Screen: 10.1” Full Color Touchscreen
- Playback Faders: 6 linear faders
- Playback Encoders: 6 rotary push-encoders with RGB backlight
- Value Encoders: 8 rotary push-encoders with RGB backlight

CONNECTIVITY

- DMX out: 2 freely mappable
- ArtNet: 4 universes, freely mappable
- sACN: 4 universes, freely mappable
- MIDI: In / Through / Out
- Wireless: 2x DMX universes freely assignable to any of the TimoTwo LumenRadio modules - CRMX or W-DMX, with Bluetooth support
- External Display: 1 HDMI out

CONNECTIONS

- Signal connection: 2 x Seetronic XLR 5p OUT connector
- Wireless Connection: 2x integrated LumenRadio TiMoTwo - CRMX, CRMX² (RX only) and W-DMX compatible
- Wireless Antenna: 2 RP-TNC female connector
- Data connection: 1 x RJ45 IN/OUT
- Data: 3 x USB-A ports (1 on the top, 2 on the back)
- Low Voltage DC connector: XLR 4P for 24V, 2 x V-Mount adapter (14,4V)

ELECTRICAL

- Low Voltage DC mains: 24V via DC IN through external power supply, 14,4-28,8V with V-Lock batteries connection
- Max power consumption (230V): 40W
- Standby power: 23 W

INSTALLATION

- Hardware on-board: tilt adjustment bar

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

EdgeGo

PROLiGHTS

ORDER CODE: EDGEGO

ACCESSORIES & RELATED PRODUCTS



AEB2DBA
2 dBi Omni antenna (RP-TNC male connector) for AETHERBOX and CRMXBOXIP67, up to 80 m




VDE15BEL010
Power cable VDE socket, bare-end, 3 X 1,5mm², L.1m



EDGEGOBAG1U
Empty ABS case for 1 pc of EDGEGO

TECHNICAL DRAWINGS

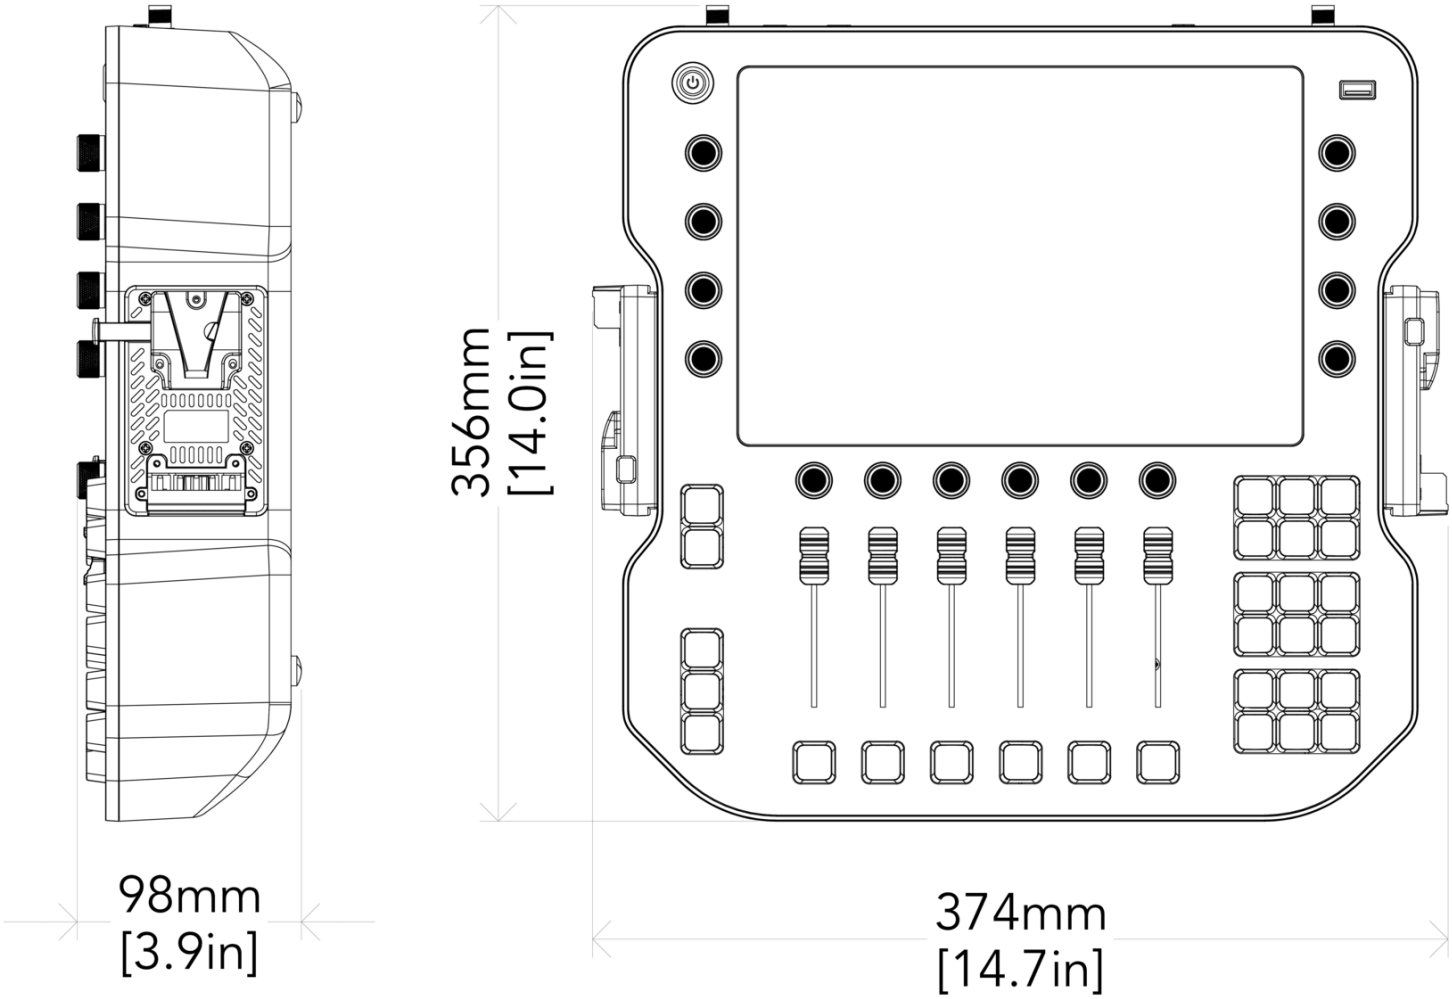

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594