Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Evo361pc

ORDER CODE: EVO361PC



Source

61x3W Warm White + Cold White LEDs

Zoom range

8-40° motorised linear zoom

IP rating

IP20

Weight

8,8kg / 19.4lbs

EVO361PC is equipped with plano-convex optics and 61x3W variable white LED source, engineered to exceed conventional projectors in performance and power, creating a real opportunity to replace traditional equipment with LED light sources.
Compared to traditional projectors, EVO361PC is only lacking in heat generation, it is characterized by cold working operations, reducing need and cost of air-conditioning in studios and implying a more comfortable environment for both talents and technicians.

MAIN FEATURES

- 61x3W high power CREE LEDs
- >TW Color mixing from 3200K to 5600K
- >Electronic linear zoom from 8-40°
- >No need for dimmers nor lamp replacement, LED lifespan >50.000h
- >Flicker-free for cameras, TV-studios friendly
- >No UV/IR emissions

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Evo361pc

ORDER CODE: EVO361PC

TECHNICAL SPECIFICATIONS

OPTICS

- Zoom range: 8-40° motorised linear zoom
- Lens type: HD anti-reflection lenses with achromatic coating

CONTROL

- Supported Protocols: DMX512
- DMX channels: 1 / 3 / 5ch
- Display: LED display user interface

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 175W

PHYSICAL

- IP rating: IP20
- Cooling: forced-air with low-noise fan
- Housing: Sturdy die-cast aluminium body
- Finish: black
- Operating temperature: Ta -10 to +45 °C (+14 to +113 °F)
- Dimensions (WxHxD): 335x357x375 mm
- Weight: 8,8kg

LIGHT SOURCE

- Source: 61x3W Warm White + Cold White LEDs
- Source CCT: 3200~5600K
- Luminous flux: 5250
- Lux: 32689lx @2 m
- CRI: >83
- Source life expectancy: > 50.000 h

COLOUR SYSTEM

- Colour mixing: tunable white
- CCT: CCT control through dedicated DMX channel
- White presets: 3200~5600K
- Macros: built-in white presets

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 5 selectable dimming modes available
- Strobe / shutter: 1-25 Hz, electronic

CONNECTIONS

- Power connection: powerCON IN
- Signal connection: Amphenol XLR 3p IN/OUT connectors

INSTALLATION


- Suspension and fixing: bracket for hanging and floor positioning

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Evo361pc

ORDER CODE: **EVO361PC**

TECHNICAL DRAWINGS

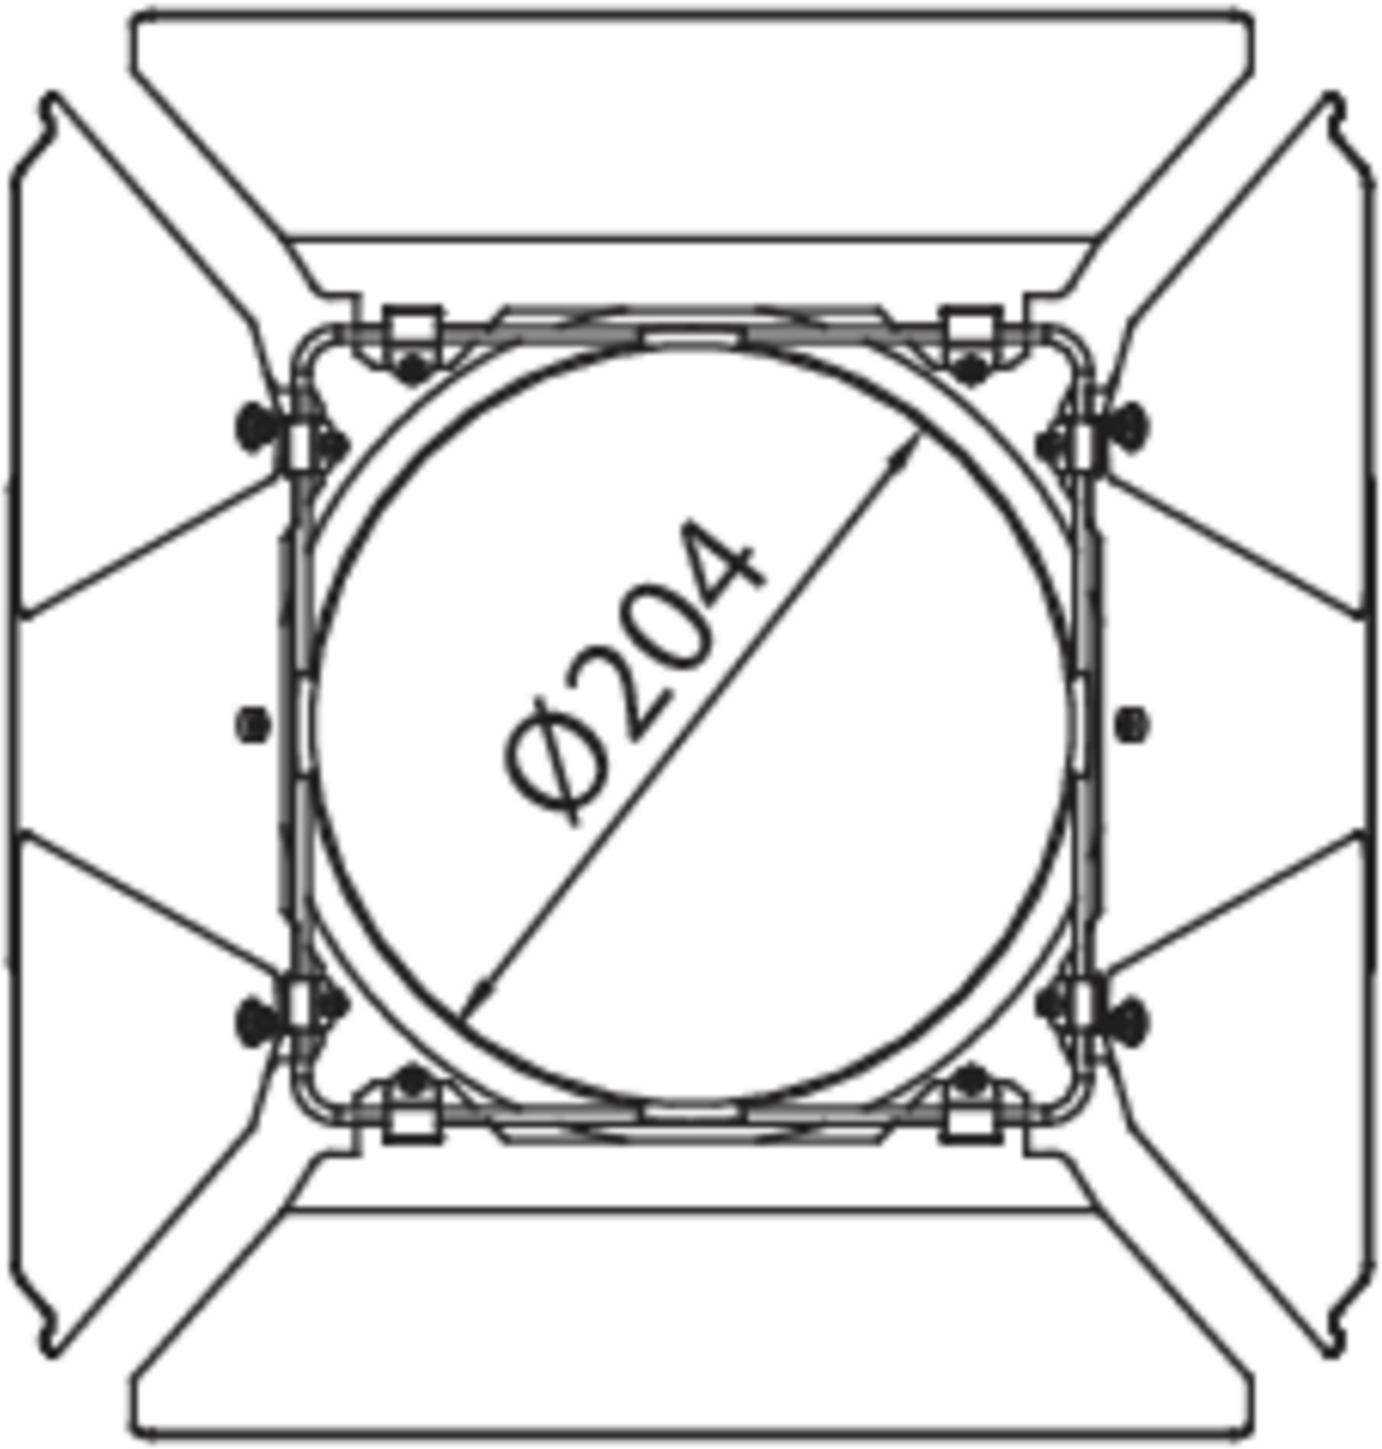

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594