Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Halu Strip

ORDER CODE: HALUSTRIP



Source

14x3W Warm White LED

IP rating

IP40

Weight

3,5kg / 7.72lbs

Halu Strip is a LED batten for 3D volumetric graphic projections. The cutting-edge optic design combines warm white 2.800 K LED source with special 8° optic reflectors which generates a long through projection of sharp beams in the air. It offers great flexibility of control with various static pattern, dynamic pattern, with speed, index, rotation, background and foreground control, dimmer fade which can be controlled by DMX.

MAIN FEATURES

- 14x3 W CREE Warm White LEDs, with a 2.800 K colour temperature
- 8° tight light beams through high definition optic collimator
- Pixel control: individual control of each single LED
- Advanced FX generator with dynamic pixel macros, static patterns, adjustable foreground and backgrounddimmer dimmer fade, speed and rotation

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Halu Strip

PROLIGHTS

ORDER CODE: HALUSTRIP

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

- Source: 14x3W Warm White LED
- Source CCT: 2.800K
- Luminous flux: 1'186
- Lux: 3'750lx @3 m
- Source life expectancy: > 50.000 h

OPTICS

- Beam angle: 7°
- Field angle: 8°
- Pixel pitch: 72mm
- Lens type: HD anti-reflection lenses with achromatic coating

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 49W
- Output (at 230V): 24 units on a single power line
- Max power consumption (120V): 48W

PHYSICAL

- IP rating: IP40
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: black
- Operating temperature: Ta -10 to +45 °C (+14 to +113 °F)
- Dimensions (WxHxD): 1000x169x58mm
- Weight: 3,5kg

INSTALLATION

- Suspension and fixing: - bracket for truss rigging and hardware for connection of more units

DYNAMIC EFFECTS

- Pixel patterns: pre-programmed static and dynamic pixel patterns
- FX generator: adjustable foreground/background colour, index, speed, direction
- Static mode: selection of static colour
- Manual mode: manual adjustment of dimmer and strobe
- Auto mode: built-in programs with execution speed adjustment

CONTROL

- Supported Protocols: DMX512
- DMX channels: 5 / 14 / 19ch
- Pixel control: pixel2pixel control
- Display: Graphic User Interface
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 25 Hz, electronic
- Firmware upgrade with: via DMX with UPBOXPRO/UPBOX1 (not included)

CONNECTIONS

- Power connection: Neutrik powerCON IN/OUT connectors
- Signal connection: Amphenol XLR 3p + 5p IN/OUT connectors

CERTIFICATIONS / REPORTS

- Compliance: CE, UKCA

BOX CONTENT

- 1 x HALUSTRIP
- 1 x 1,5 meters power cable (BARE END - NEUTRIK POWERCON)

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Halu Strip

ORDER CODE: **HALUSTRIP**

ACCESSORIES & RELATED PRODUCTS



C6002B
Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black



RSR0630B
Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black



9533FCAL03
Ass. 3x2.5mm TH07 cable, SCHUKO plug, MENAC3FCA socket, L.3m



9513FCAL03
Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FCA socket, L.3m



958025L03
3x2.5mm TH07 Cable, 20A 3p PwCon FCA, 20A 3p PwCon FCB, L. 3m


TOUR53413L03
Dmx cable HC5340. CANC3MXX XLR 3p->CANC3FXX XLR (f) 3p, L.3m

TOUR53415L03
Dmx cable HC5340. CANC5MXX XLR 5p->CANC5FXX XLR (f) 5p, L.3m



UPBOXPRO
Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHNICAL DRAWINGS

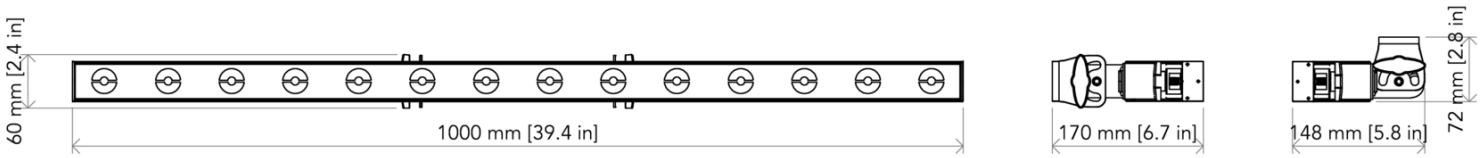

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594