Jet PAR7ZIP

ORDER CODE: JETPAR7ZIPBK



SOURCE	ZOOM RANGE	IP RATING
7x20W RGB + Warm White LED	**4,5° - 53° motorised linear zoom**	**IP65 for temporary outdoor use (*)**

WEIGHT	LUMINOUS FLUX (MAX)	CRI
9,3kg / 20.5lbs	**1'229 lm**	**93,8 @ 3'200K**

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

Source:	7x20W RGB + Warm White LED
Luminous flux:	(4,5°) 1'229 lm - (53°) 2'108 @Full
Lux:	(4,5°) 27'888 lx - (53°) 720lx @3 m full
CRI:	93,8 @ 3'200K; 92,5 @ 5'600K
R9:	93,4 @ 3'200K; 79 @ 5'600K
Source life expectancy:	> 50.000 hrs (L70B10 @Ta 25° C / 77° F)

OPTICS

Zoom range:	4,5° - 53° motorised linear zoom
Lens type:	honeycomb gapless plano-convex optics

COLOUR SYSTEM

CCT:	CCT control, + / - green correction, tungsten emulation
White presets:	2.800 K ~ 10.000K
Colour wheel:	gel filters included

DYNAMIC EFFECTS

Control Resolution:	16-bit dimmer control
Special features:	linear crossfade channel from any white to any colour; virtual CTO on colours

CONTROL

Supported Protocols:	DMX512, RDM, CRMX + WDMX (optional)
DMX channels:	1 / 2 / 6 / 12 / 14 / 20ch
RDM:	for remote addressing and parameter configuration
Display:	LCD high resolution colour display

ELECTRONICS

Dimmer:	linear 0 - 100% electronic dimmer
Dimmer curves:	4 selectable dimming modes available
Strobe / shutter:	1 - 30 Hz, electronic
Selectable PWM:	600 to 50,000 Hz (selectable steps)
Firmware upgrade with:	via DMX with UPBOXPRO/ UPBOX2 (not included)

CONNECTIONS

Power connection:	Seetronic powerCON TRUE IP65 IN/OUT
Signal connection:	Seetronic XLR 5p IN/OUT connectors
Wireless Connection:	optional LumenRadio TiMo FX RDM - CRMX and W-DMX compatible

ELECTRICAL

Mains power supply:	100-240V - 50/60Hz
Max power consumption (230V):	127W
Output (at 230V):	16 units on a single power line
Standby power:	12W
Power factor:	> 0,95

PHYSICAL

IP rating:	IP65 for temporary outdoor use (*)
Cooling:	forced-air with low-noise fan
Housing:	Weatherproof IP65 construction
Finish:	black
Operating temperature:	Ta -20 to +45 °C (-4 to +113 °F)
Dimensions (WxHxD):	291x347x300mm
Weight:	9,3kg

INSTALLATION

Suspension and fixing:	double bracket for hanging and floor positioning
Other:	Front mount holder for accessories as Barndoor, filterframe

CERTIFICATIONS / REPORTS

Compliance:	CE, UKCA, RCM, cTUVus, FCC

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

(*)

NOTE: Suitable for permanent outdoor use, provided that installation and periodic maintenance are carried out by qualified technicians.

BOX CONTENT

1 x JETPAR7ZIP

1 x 1,5 meters 3G1,5mmq power cable (BARE END - SEETRONIC POWERCON TRUE1 IP65 power connector)

ACCESSORIES & RELATED PRODUCTS




AJP7ZIPBAG1U

Empty ABS case for 1 pc of ASTRAPAR7ZIP or JETPAR7ZIP



FCLAJP7ZIP

Flight case for 6 pcs ASTRAPAR7ZIP / JETPAR7ZIP



AJP7ZIPBDBK

Barn door with 8 directional flaps to adjust the light beam, ASTRA / JET PAR7ZIP



AJP7ZIPFFBK

Filter frame for ASTRAPAR7ZIP e JETPAR7ZIP, black



JP7ZIPWKB

CRMX Timo Fx kit for JETPAR7ZIP, black finishing



IPTESTBOX

Portable vacuum and pressure tester for ProLights IP fixtures



AETHERBOXONE

IP65 1x universe CRMX transceiver, DMX, Ethernet protocols, Wi-Fi, Bluetooth, battery-ready, POE



AETHERBOX

IP65 1 universe CRMX transceiver, DMX and Ethernet protocols, Wi-Fi, Bluetooth and battery ready





UPBOXPRO

Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice


TECHNICAL DRAWINGS

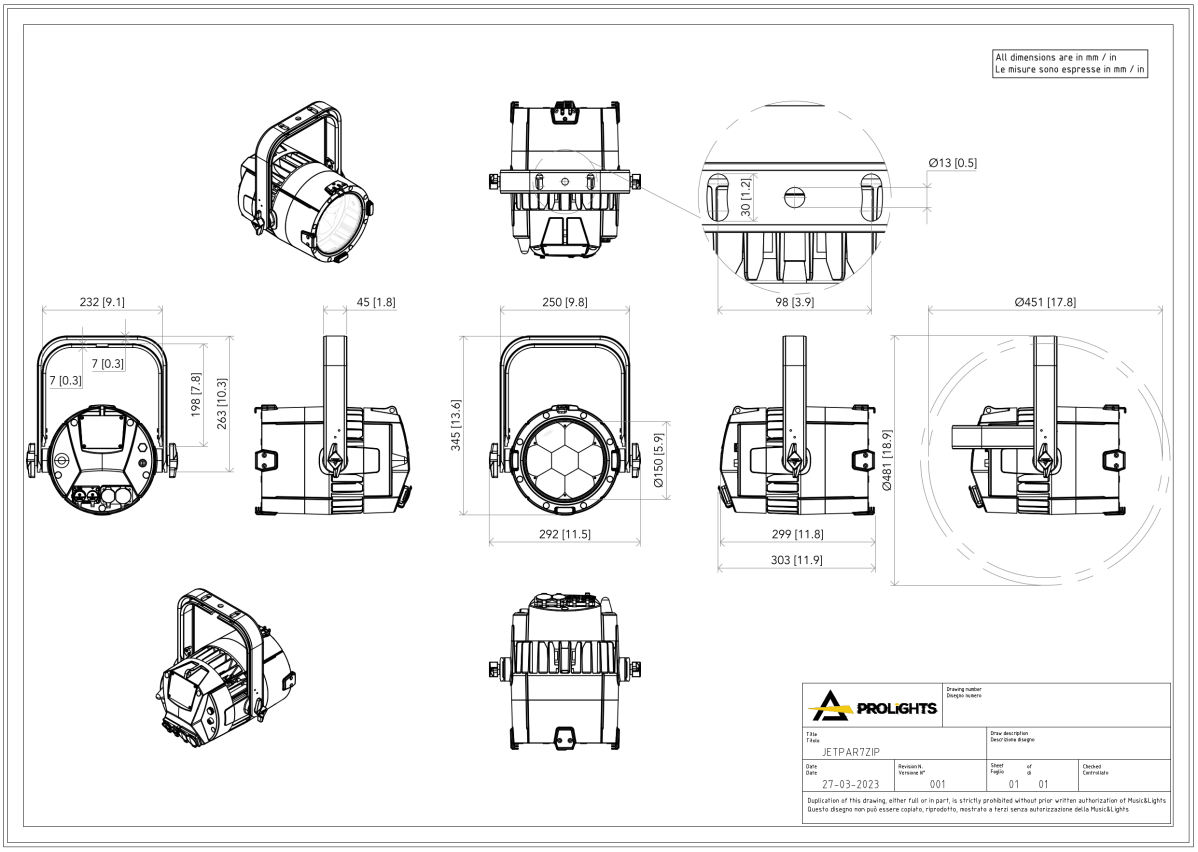

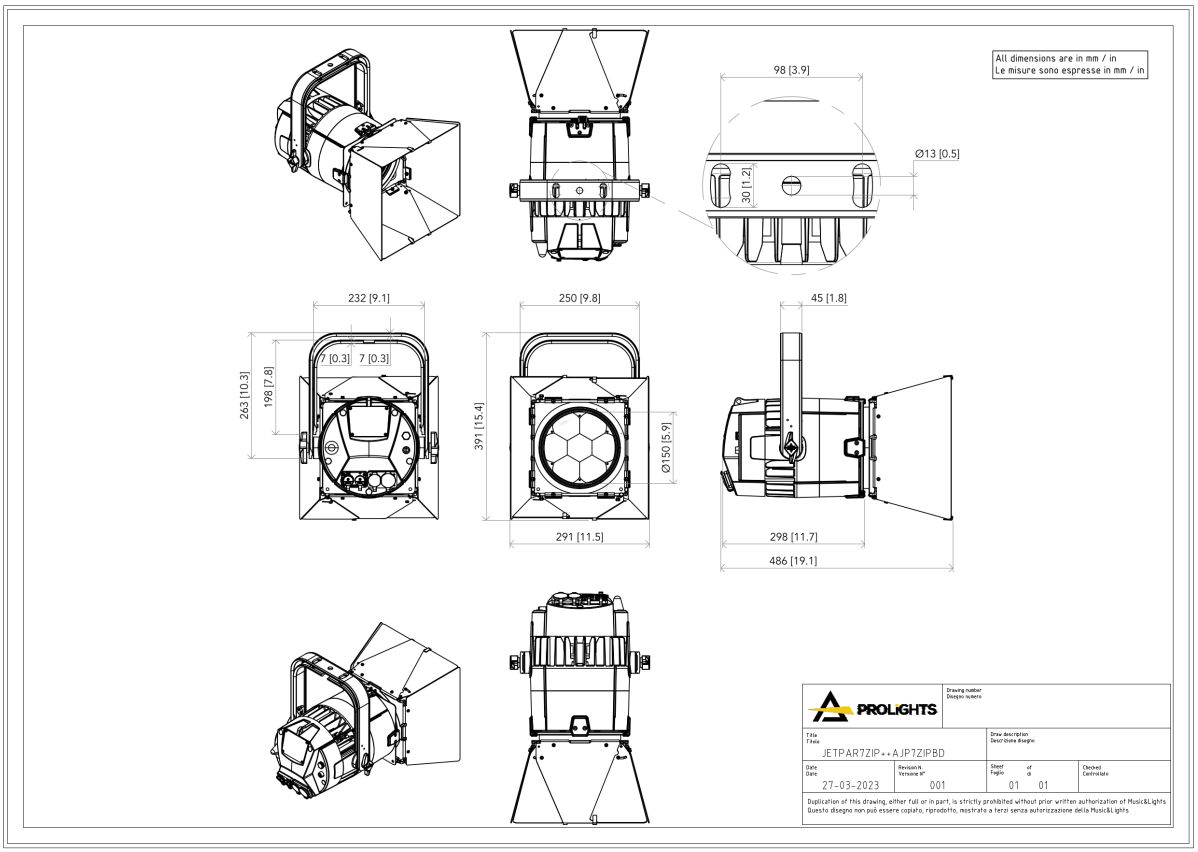


PHOTOMETRICS

Full On - Min Zoom

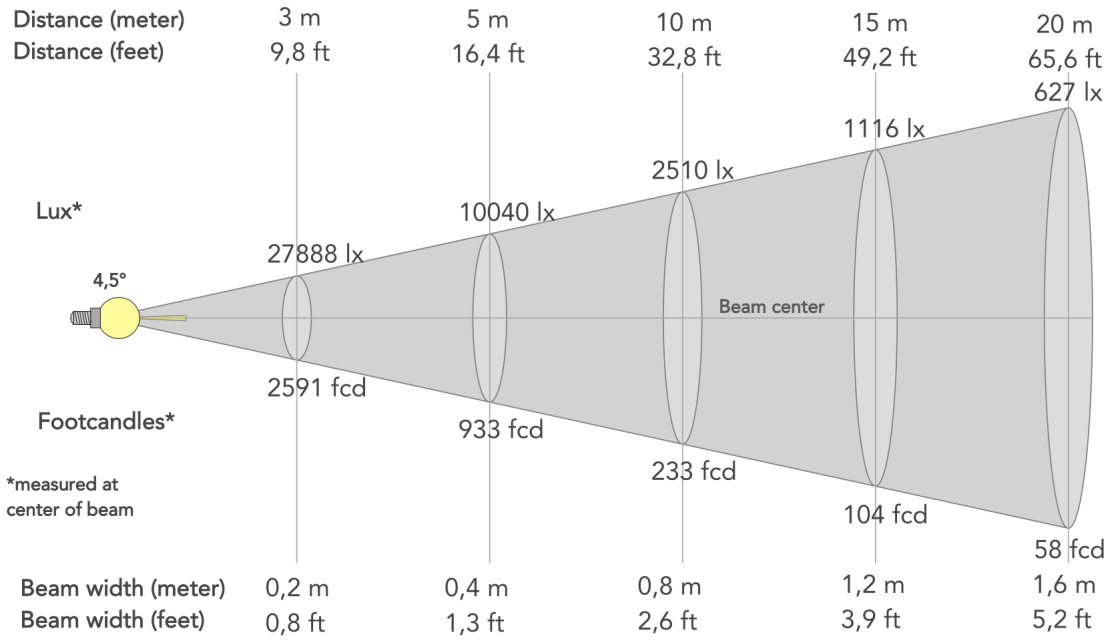

Beam angle (50%): **4.5°**	Field angle (10%): **5.3°**	Cut-off angle (2.5%): **6.1°**

Full On - Max Zoom

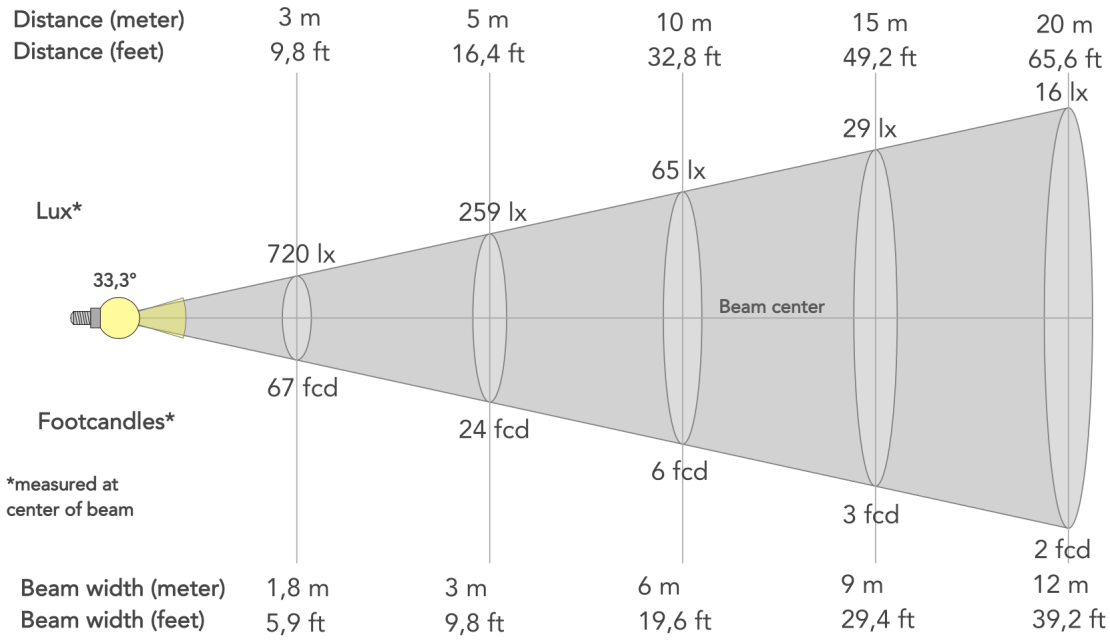

Beam angle (50%): **33.3°**	Field angle (10%): **49.7°**	Cut-off angle (2.5%): **59°**