Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Jet Spot2

PROLIGHTS

ORDER CODE: **JETSPOT2WH**

VERSIONS

	Code	Housing
	JETSPOT2BK	Black
	**JETSPOT2WH**	**White**

Source

150W high-power white LED

IP rating

IP20

Weight

13,7kg / 30.2lbs

Jet Spot2 is a LED spot luminaire designed to deliver a stunning light level for its size and price. Ideal both for installation and for rental, the Jet Spot2 focuses on maximising the light output from its LED source to deliver a crisp, even beam from a compact size.

MAIN FEATURES

- Ultra-efficient 150W 8.000 K white LED source
- Fixed 20° beam angle
- Extensive effects including one colour wheel, rotating gobo wheel, static gobo wheel, prism and focus

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Jet Spot2

PROLIGHTS

ORDER CODE: JETSPOT2WH

TECHNICAL SPECIFICATIONS

OPTICS

- Beam angle: 20°
- Focus: motorised 8/16-bit

COLOUR SYSTEM

- Colour wheel: 8 colour filters + open

GOBOS

- Gobo wheel 1: 7 rotating gobos + open, interchangeable, indexing
- Gobo size: outer: 24,2 mm - image: 20 mm - thickness: 0,3 mm
- Fixed gobos: 8 fixed gobos + open

CONNECTIONS

- Power connection: Seetronic powerCON IN/OUT connectors
- Signal connection: XLR 3p + 5p IN/OUT connectors

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 225W
- Output (at 230V): 16 units on a single power line
- Max power consumption (120V): 226W
- Output (at 120V): 8 units on a single power line

PHYSICAL

- IP rating: IP20
- Housing: Aluminium structure with high-resistance polycarbonate cover
- Finish: black (RAL 9004) or white (RAL 9003)
- Operating temperature: Ta -10 to +45 °C (+14 to +113 °F)
- Dimensions (WxHxD): 308x436x230mm
- Weight: 13,7kg

BOX CONTENT

- 1 x JETSPOT2
- 1 x 1,5 meters power cable (BARE END - SEETRONIC power connector)
- 2 x OS24PLUS

LIGHT SOURCE

- Source: 150W high-power white LED
- Source CCT: 8.000K
- Luminous flux: 7'400
- Lux: 8'900lx @3 m
- Lux: 810lx @10 m
- CRI: 78
- Source life expectancy: > 50.000 h

DYNAMIC EFFECTS

- Circular prism: 3-f with bi-directional rotation, indexing
- Auto mode: built-in programs with execution speed adjustment

CONTROL

- Supported Protocols: DMX512, RDM
- DMX channels: 12 / 15ch
- RDM: for remote addressing and parameter configuration
- Display: Graphic User Interface
- Master/Slave: for synchronised operation of more units linked in a chain

MOVEMENT

- Pan: 540° - 8/16-bit resolution
- Tilt: 270° - 8/16-bit resolution
- Position feedback: automatic repositioning after external movement

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Strobe / shutter: 1 - 30 Hz, electronic
- Firmware upgrade with: via DMX with UPBOXPRO/UPBOX1 (not included)

INSTALLATION

- Suspension and fixing: any position with quick-lock Omega brackets

CERTIFICATIONS / REPORTS

- Compliance: CE, UKCA, RCM

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Jet Spot2

ORDER CODE: **JETSPOT2WH**

ACCESSORIES & RELATED PRODUCTS



C6016B
Selflock slim clamp, 250Kg load, 48-51mm tubes, M10 bolt incl, Black&White& White




RSR0630B
Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black

TOUR53413L03
Dmx cable HC5340. CANC3MXX XLR 3p->CANC3FXX XLR (f) 3p, L.3m

TOUR53415L03
Dmx cable HC5340. CANC5MXX XLR 5p->CANC5FXX XLR (f) 5p, L.3m

TECHNICAL DRAWINGS

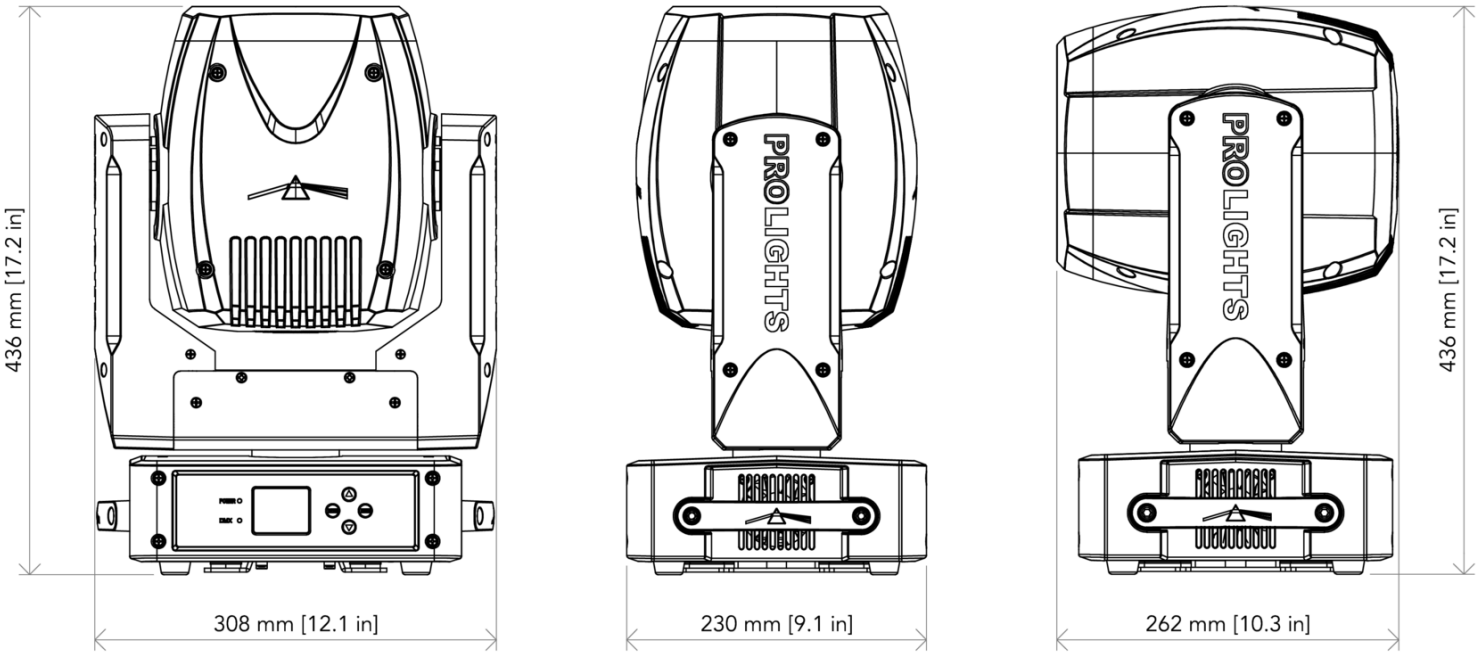

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594