LumiPar 12UQPro

ORDER CODE: **LUMIPAR12UQPRO5**



VERSIONS

	Code	Power	DMX	Lens	Beam Angle	Filter
	LUMIPAR12UQPRO3	VDE	3p in/out			N/A
	**LUMIPAR12UQPRO5**	**Powercon in/out**	**3p+5p in/out**	**ARCLUMIL25D38**	**15°**	**N/A**

SOURCE
12x8W RGBW LEDs

IP RATING
IP44

WEIGHT
3,3kg / 7.28lbs

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

Source:	12x8W RGBW LEDs
Source CCT:	W: 6.600K
Luminous flux:	4'341
Lux:	1'607lx @5 m
Source life expectancy:	> 50.000 h

OPTICS

Beam angle:	15°
Lens diameter:	38mm
Additional optics:	15° (on-board) - 45° (optional)

COLOUR SYSTEM

Colour wheel:	virtual colour wheel with macros

DYNAMIC EFFECTS

Static mode:	selection of static colour
Manual mode:	manual adjustment of dimmer and strobe
Auto mode:	built-in programs with execution speed adjustment

CONTROL

Supported Protocols:	DMX512
DMX channels:	4 / 9ch
Display:	LED display user interface
IR:	infrared sensor controlled by remote
Master/Slave:	for synchronised operation of more units linked in a chain

ELECTRONICS

Dimmer:	linear 0 - 100% electronic dimmer
Dimmer curves:	4 selectable dimming modes available
Strobe / shutter:	1 - 28 Hz, electronic
Firmware upgrade with:	via DMX with UPBOXPRO/ UPBOX1 (not included)

CONNECTIONS

Power connection:	variants available
Signal connection:	variants available
Wireless Connection:	optional WIBOX, WDBOX proprietary protocol
Data:	USB-A port for USB WIFI transmitter (optional)

ELECTRICAL

Mains power supply:	100-240V - 50/60Hz
Max power consumption (230V):	77W
Output (at 230V):	11 units on a single power line
Max power consumption (120V):	78W
Output (at 120V):	9 units on a single power line

PHYSICAL

IP rating:	IP44
IK rating:	IK07 impact rating
Cooling:	fan-free with natural convection
Housing:	Sturdy die-cast aluminium body
Finish:	black
Operating temperature:	Ta -10 to +45 °C (+14 to +113 °F)
Dimensions (WxHxD):	253x200x237mm
Weight:	3,3kg

INSTALLATION

Suspension and fixing:	double bracket for hanging and floor positioning

CERTIFICATIONS / REPORTS

Compliance:	CE, UKCA, RCM

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

BOX CONTENT

1 x LUMIPAR12UQPRO

1 x 1,5 meters 3G0,75mmq power cable (BARE END - SEETRONIC POWERCON power connector)

ACCESSORIES & RELATED PRODUCTS



ARCLUMIL25D38
Optic lens 15°, D.38mm



ARCLUMIL45D38
Optic lens 45°, D.38mm



WIFIUSB
USB Wi-Fi transreceiver, compatible with WIFIBOX and WDBOX




LUMIPARIRCH
RGBWA IR remote controller, manual / auto modes, for LUMIPAR IR series




UPBOXPRO
Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHNICAL DRAWINGS

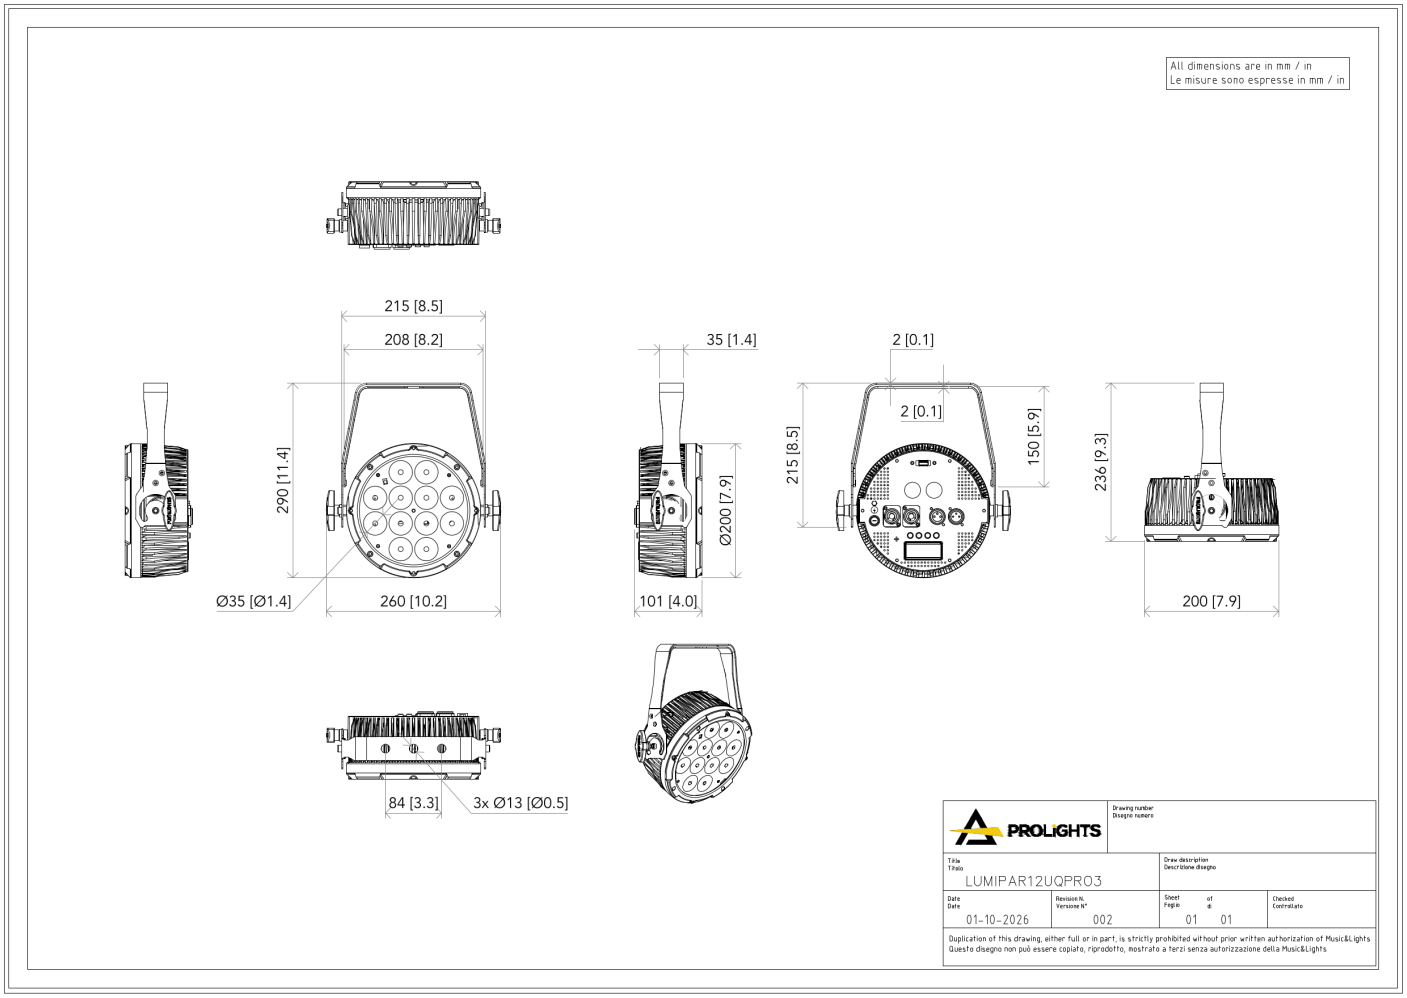

PHOTOMETRICS

Full On - Original Optic

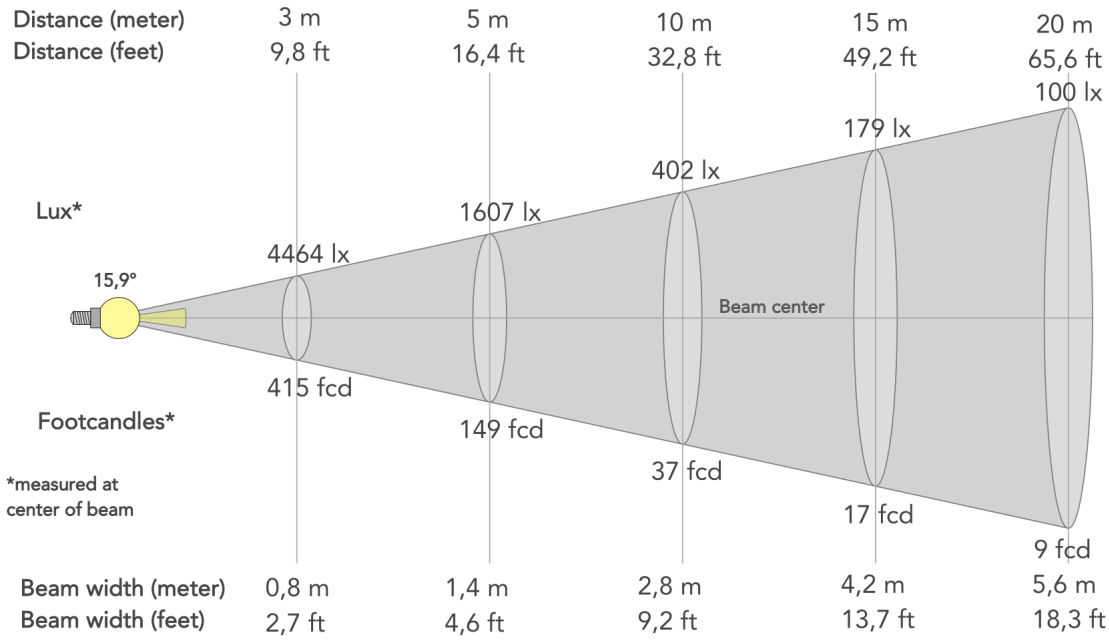

Beam angle (50%): **15.9°**	Field angle (10%): **29.4°**	Cut-off angle (2.5%): **40.7°**

MUSIC & LIGHTS S.r.l. | Via A. Olivetti, snc
04026 - Minturno (LT) ITALY | info@prolights.it
Tel: +39 0771 72190 | **prolights.it**
VAT No. IT 02057590594

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice