Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar18qpro

PROLIGHTS

ORDER CODE: LUMIPAR18QPRO45

VERSIONS

	Code	Beam angle
	LUMIPAR18QPRO25	25°
	**LUMIPAR18QPRO45**	**45°**

Source

18x8W RGBW LED

IP rating

IP44

Weight

5kg / 11.02lbs

LUMIPAR18QPRO is a super-slim par LED for professional use, designed to be a powerful wash light in rental/touring applications. The high-efficiency RGBW/FC LED light source, the ultra-thin design and absence of fans make LUMIPAR18QPRO a big innovation compared to traditional par cans, offering higher versatility, easy setup and reduced carrying volume.

MAIN FEATURES

- 18x8W RGBW/FC high-power LED
- Superior optical design to ensure advanced chromatic synthesis
- Flicker free operations
- Silent operation and linear dimming system

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar18qpro

ORDER CODE: LUMIPAR18QPRO45

TECHNICAL SPECIFICATIONS

OPTICS

- Beam angle: (18QPRO25) 25°, (18QPRO45) 45°
- Field angle: (18QPRO25) 38°, (18QPRO45) 50°

COLOUR SYSTEM

- White presets: 3200~10000K
- Colour wheel: virtual colour wheel with macros
- Macros: built-in white presets

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 118W
- Output (at 230V): 12 units on a single power line
- Max power consumption (120V): 121W

PHYSICAL

- IP rating: IP44
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: black
- Operating temperature: Ta -10 to +45 °C (+14 to +113 °F)
- Dimensions (WxHxD): 302x239x259mm
- Weight: 5kg

INSTALLATION

- Suspension and fixing: double bracket for hanging and floor positioning

LIGHT SOURCE

- Source: 18x8W RGBW LED
- Luminous flux: 3577
- Lux: (25°) 1758lx @3 m full
- Source life expectancy: > 50.000 h

DYNAMIC EFFECTS

- Static mode: selection of static colour
- Manual mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment

CONTROL

- Supported Protocols: DMX512
- DMX channels: 4 / 6 / 10ch
- Display: LCD display
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 5 selectable dimming modes available
- Strobe / shutter: 1-25 Hz, electronic

CONNECTIONS

- Power connection: Neutrik powerCON IN/OUT connectors
- Signal connection: 3p IN/OUT

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar18qpro

ORDER CODE: LUMIPAR18QPRO45

ACCESSORIES & RELATED PRODUCTS




ARCLUMIL25D38
Optic lens 15°, D.38mm



ARCLUMIL45D38
Optic lens 45°, D.38mm

TECHNICAL DRAWINGS

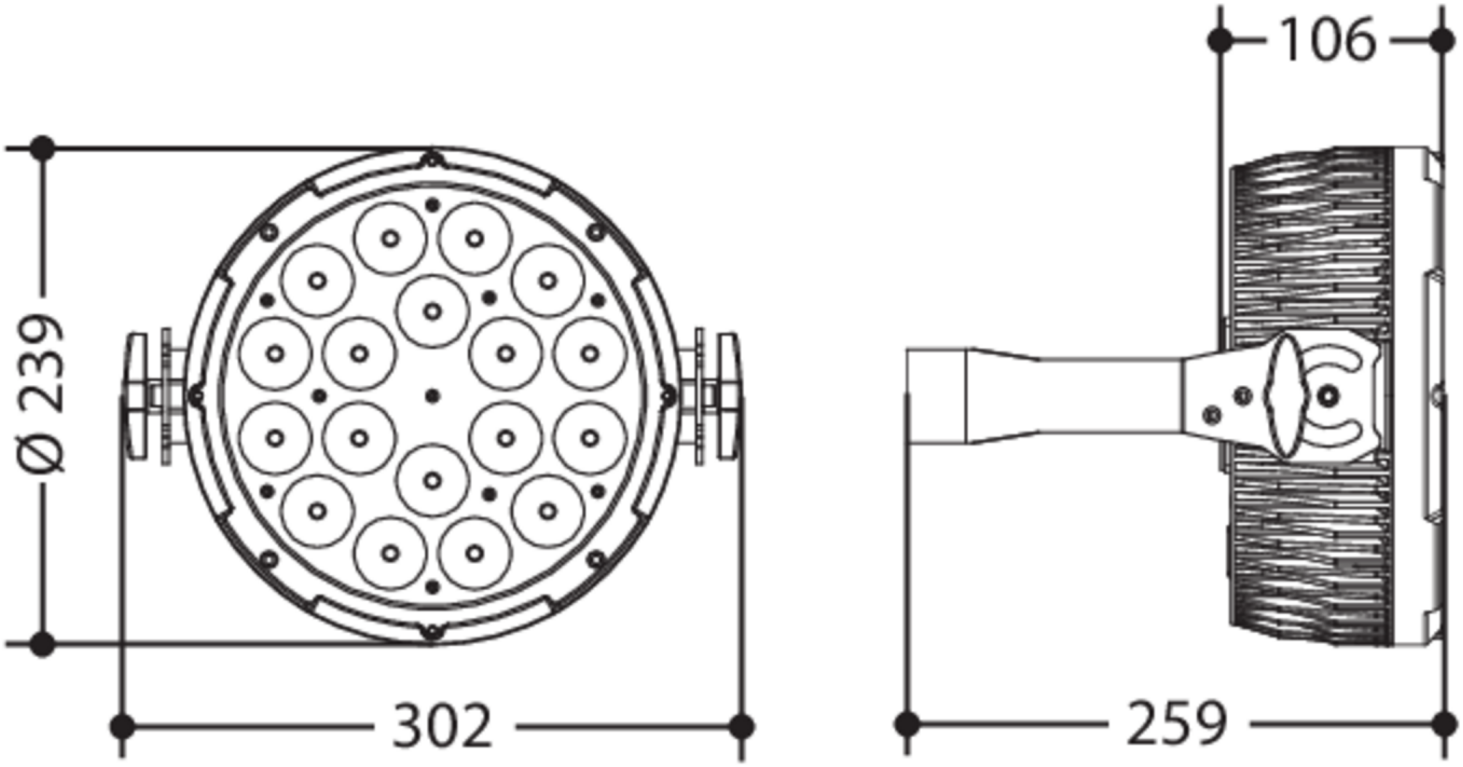

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594