Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar18vwpro

ORDER CODE: LUMIPAR18VWPRO



Source

18x6W Warm White + Cold White LEDs

IP rating

IP44

Weight

4,65kg / 10.25lbs

LUMIPAR18VWPRO is a super-slim par LED for professional use, designed to be a powerful wash-light in Rental/Touring applications. The high efficiency Variable White LEDs light source, the ultra-thin design and the absence of fans make LUMIPAR18VWPRO a big innovation compared to traditional parcans, offering higher versatility, easy setup and reduced carrying volume.

MAIN FEATURES

- 18 x 6W Tunable White LED source (WW 3000K+CW 6000K)
- Indipendent CTC channel featuring from 3000K to 6000K
- Superior optical design to ensure advanced chromatic synthesis
- Flicker free operations
- Silent operation and linear dimming system

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar18vwpro

ORDER CODE: LUMIPAR18VWPRO

TECHNICAL SPECIFICATIONS

COLOUR SYSTEM

- Colour mixing: tunable white
- CCT: CCT control through dedicated DMX channel
- White presets: 3000~6000K
- Macros: built-in white presets

DYNAMIC EFFECTS

- Static mode: selection of static colour
- Manual mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 5 selectable dimming modes available
- Strobe / shutter: 1-25 Hz, electronic
- Firmware upgrade with: via DMX with UPBOXPRO/UPBOX1 (not included)

PHYSICAL

- IP rating: IP44
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: white
- Operating temperature: Ta -10 to +45 °C (+14 to +113 °F)
- Dimensions (WxHxD): 302x239x259mm
- Weight: 4,65kg

INSTALLATION

- Suspension and fixing: double bracket for hanging and floor positioning

LIGHT SOURCE

- Source: 18x6W Warm White + Cold White LEDs
- Source CCT: 3000-6000K
- Luminous flux: 3142
- Lux: 5640lx @3 m
- Source life expectancy: > 50.000 h

OPTICS

- Beam angle: 25°
- Field angle: 39°
- Lens diameter: 38mm
- Additional optics: 45° (optional)

CONTROL

- Supported Protocols: DMX512
- DMX channels: 2/3/7ch
- Display: LCD display
- Master/Slave: for synchronised operation of more units linked in a chain

CONNECTIONS

- Power connection: Neutrik powerCON IN/OUT connectors
- Signal connection: 3p IN/OUT

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 101W
- Output (at 230V): 16 units on a single power line
- Max power consumption (120V): 102W

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar18vwpro

ORDER CODE: LUMIPAR18VWPRO

ACCESSORIES & RELATED PRODUCTS




ARCLUMIL45D38
Optic lens 45°, D.38mm



UPBOXPRO
Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHNICAL DRAWINGS

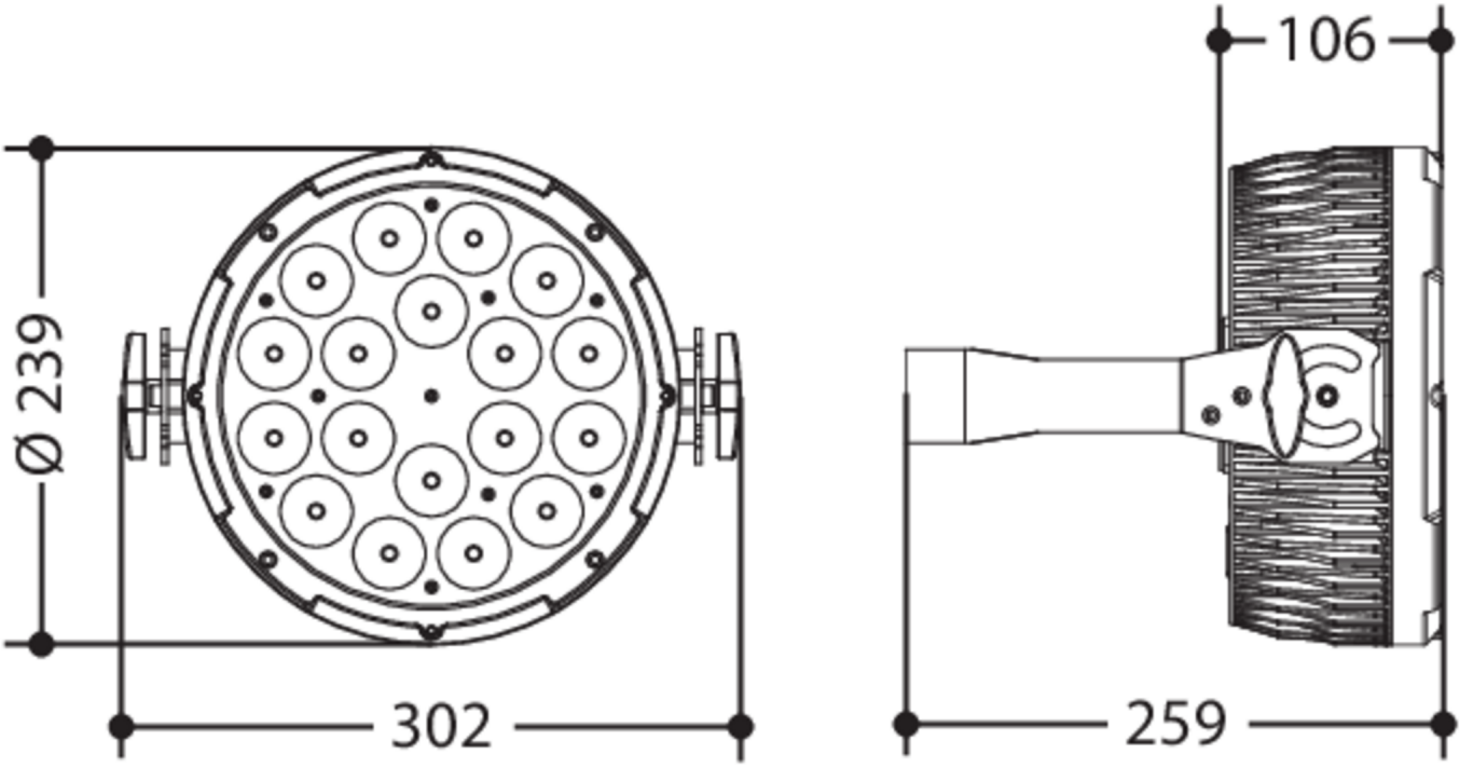

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594