Downloaded on 05/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar 7HPro

PROLIGHTS

ORDER CODE: LUMIPAR7HPRO



Source

7x12W RGBWAP LEDs

IP rating

IP44

Weight

3,2kg / 7.05lbs

LUMIPAR7HPRO is a super-slim PAR LED for professional use, designed to be a powerful wash light in rental/touring applications. The high efficiency RGBWAP / FC LED light source, the ultra-thin design and absence of fans make LUMIPAR7HPRO a big innovation compared to traditional PAR CANS, offering higher versatility, easy setup and reduced carrying volume.

MAIN FEATURES

- 7x12 W RGBAW + UV LEDs
- Extensive colour palette and powerful output
- Flicker-free operation for IMAG and broadcast

Downloaded on 05/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar 7HPro

PROLIGHTS

ORDER CODE: LUMIPAR7HPRO

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

- Source: 7x12W RGBWAP LEDs
- Luminous flux: 1'939
- Lux: (15°) 982,6lx @3 m full
- Source life expectancy: > 50.000 h

COLOUR SYSTEM

- White presets: 3.200 K ~ 10.000K
- Colour wheel: virtual colour wheel with macros
- Macros: built-in white presets

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 54W
- Output (at 230V): 24 units on a single power line
- Max power consumption (120V): 54W

PHYSICAL

- IP rating: IP44
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: black
- Operating temperature: Ta -10 to +45 °C (+14 to +113 °F)
- Dimensions (WxHxD): 253x201x244mm
- Weight: 3,2kg

INSTALLATION

- Suspension and fixing: double bracket for hanging and floor positioning

OPTICS

- Beam angle: 25°
- Field angle: 34°
- Lens diameter: 42mm
- Additional optics: 15° and 45° (optional)

DYNAMIC EFFECTS

- Static mode: selection of static colour
- Manual mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment

CONTROL

- Supported Protocols: DMX512
- DMX channels: 3 / 6 / 8 / 12ch
- Display: LCD display
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 5 selectable dimming modes available
- Strobe / shutter: 1 - 25 Hz, electronic
- Firmware upgrade with: via DMX with UPBOXPRO/UPBOX1 (not included)

CONNECTIONS

- Power connection: Neutrik powerCON IN/OUT connectors
- Signal connection: XLR 3p + 5p IN/OUT connectors

Downloaded on 05/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar 7HPro

ORDER CODE: **LUMIPAR7HPRO**

ACCESSORIES & RELATED PRODUCTS



ARCLUMIL25D42
Optic lens 25°, D.42mm




ARCLUMIL45D42
Optic lens 45°, D.42mm



UPBOXPRO
Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHNICAL DRAWINGS

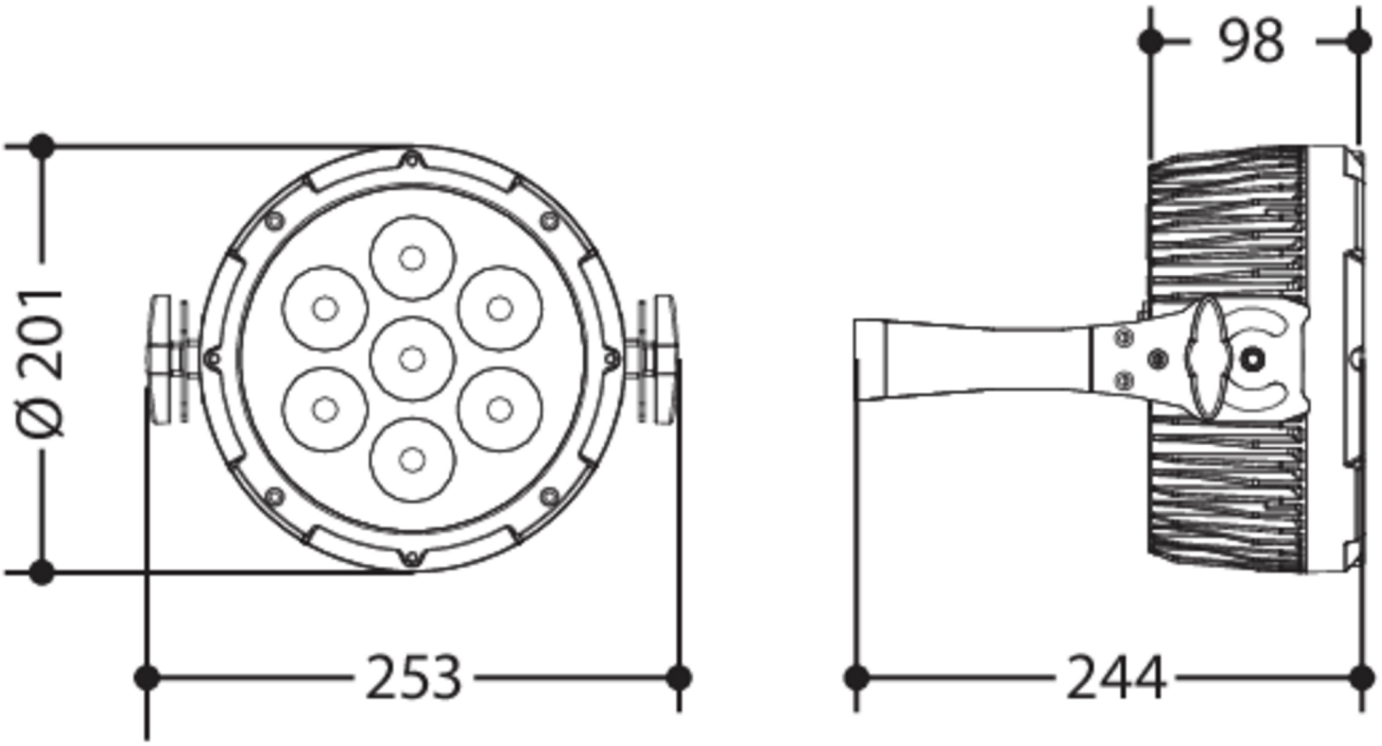

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594