Lumipar7qpro

ORDER CODE: LUMIPAR7QPRO



SOURCE	IP RATING	WEIGHT
7x8W RGBW LED	**IP44**	**2,5kg / 5.51lbs**

Downloaded on 28/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

Source:	7x8W RGBW LED
Luminous flux:	1736
Lux:	934lx @3 m full
Source life expectancy:	> 50.000 h

OPTICS

Beam angle:	25°
Field angle:	34°
Lens diameter:	38mm
Additional optics:	45° (optional)

COLOUR SYSTEM

White presets:	3200~10000K
Colour wheel:	virtual colour wheel with macros
Macros:	built-in white presets

DYNAMIC EFFECTS

Static mode:	selection of static colour
Manual mode:	manual adjustment of colour
Auto mode:	built-in programs with execution speed adjustment

CONTROL

Supported Protocols:	DMX512
DMX channels:	4/6/10ch
Display:	LCD display
Master/Slave:	for synchronised operation of more units linked in a chain

ELECTRONICS

Dimmer:	linear 0 - 100% electronic dimmer
Dimmer curves:	5 selectable dimming modes available
Strobe / shutter:	1-25 Hz, electronic
Firmware upgrade with:	via DMX with UPBOXPRO/ UPBOX1 (not included)

CONNECTIONS

Power connection:	Neutrik powerCON IN/OUT connectors
Signal connection:	3p IN/OUT

ELECTRICAL

Mains power supply:	100-240V - 50/60Hz
Max power consumption (230V):	43W
Output (at 230V):	8 units on a single power line
Max power consumption (120V):	43W

PHYSICAL

IP rating:	IP44
Cooling:	fan-free with natural convection
Housing:	Sturdy die-cast aluminium body
Finish:	black
Operating temperature:	Ta -10 to +45 °C (+14 to +113 °F)
Dimensions (WxHxD):	240x184x208mm
Weight:	2,5kg

INSTALLATION

Suspension and fixing:	double bracket for hanging and floor positioning

ACCESSORIES & RELATED PRODUCTS




ARCLUMIL45D38
Optic lens 45°, D.38mm



UPBOXPRO
Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHNICAL DRAWINGS

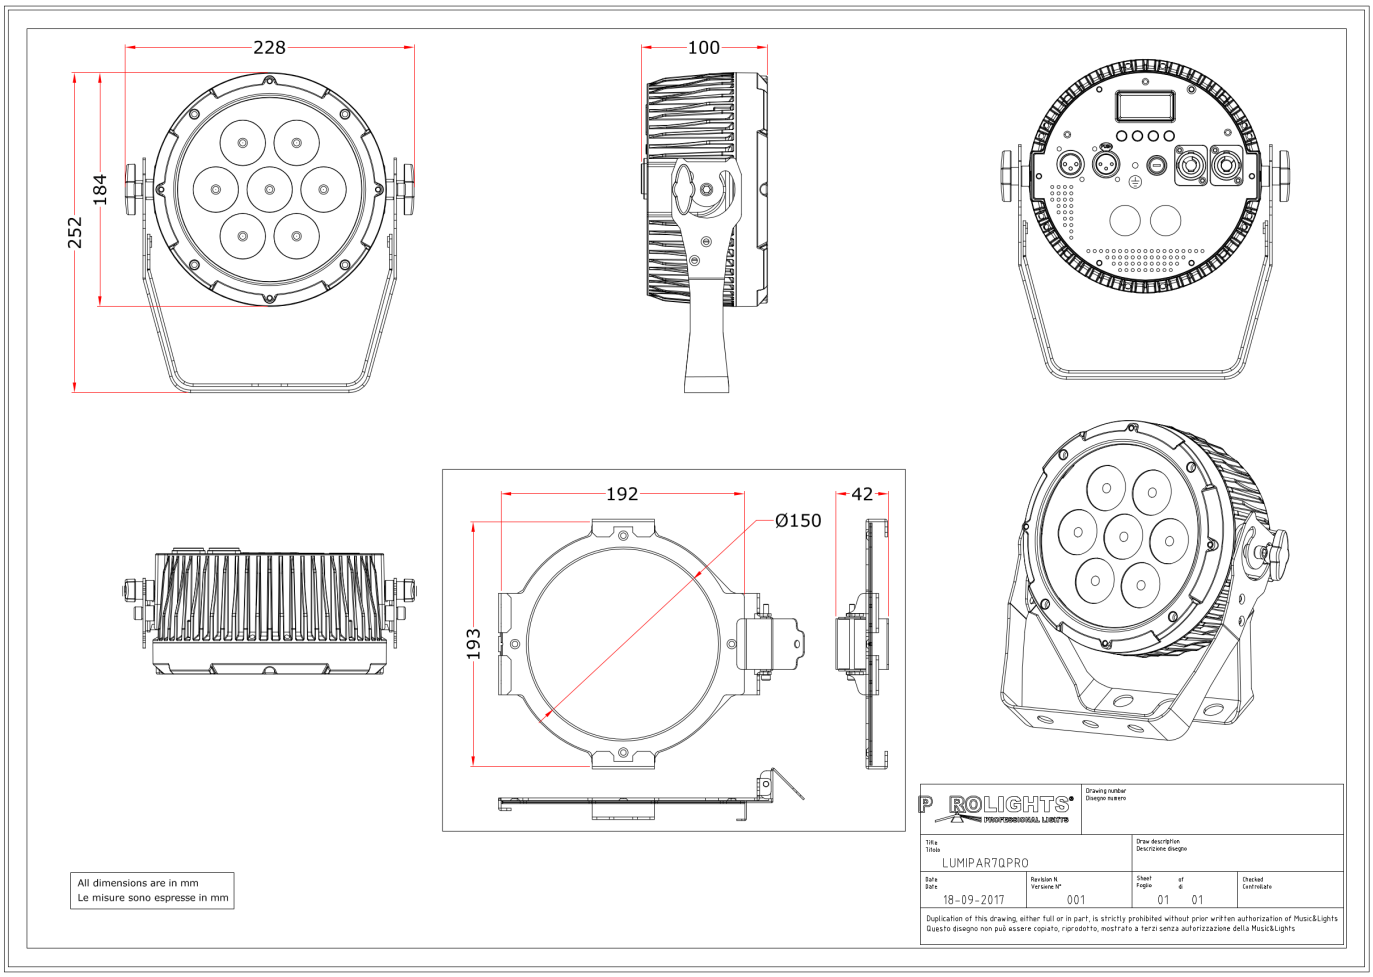

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594

Downloaded on 28/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice