Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar7qpro

ORDER CODE: LUMIPAR7QPRO



Source

7x8W RGBW LED

IP rating

IP44

Weight

2,5kg / 5.51lbs

LUMIPAR7QPRO is a super-slim par LED for professional use, designed to be a powerful wash-light in Rental/Touring applications. The high efficiency RGBW/FC LEDs light source, the ultra-thin design and the absence of fans make LUMIPAR7QPRO a big innovation compared to traditional parcans, offering higher versatility, easy setup and reduced carrying volume.

MAIN FEATURES

- 7 x 8 W RGBW/FC high-power LED
- >Superior optical design to ensure advanced chromatic synthesis
- >Flicker free operations
- >Silent operation and linear dimming system

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar7qpro

ORDER CODE: LUMIPAR7QPRO

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

- Source: 7x8W RGBW LED
- Luminous flux: 1736
- Lux: 934lx @3 m full
- Source life expectancy: > 50.000 h

COLOUR SYSTEM

- White presets: 3200~10000K
- Colour wheel: virtual colour wheel with macros
- Macros: built-in white presets

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 43W
- Output (at 230V): 8 units on a single power line
- Max power consumption (120V): 43W

PHYSICAL

- IP rating: IP44
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: black
- Operating temperature: Ta -10 to +45 °C (+14 to +113 °F)
- Dimensions (WxHxD): 240x184x208mm
- Weight: 2,5kg

INSTALLATION

- Suspension and fixing: double bracket for hanging and floor positioning

OPTICS

- Beam angle: 25°
- Field angle: 34°
- Lens diameter: 38mm
- Additional optics: 45° (optional)

DYNAMIC EFFECTS

- Static mode: selection of static colour
- Manual mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment

CONTROL

- Supported Protocols: DMX512
- DMX channels: 4/6/10ch
- Display: LCD display
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 5 selectable dimming modes available
- Strobe / shutter: 1-25 Hz, electronic
- Firmware upgrade with: via DMX with UPBOXPRO/UPBOX1 (not included)

CONNECTIONS

- Power connection: Neutrik powerCON IN/OUT connectors
- Signal connection: 3p IN/OUT

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Lumipar7qpro

ORDER CODE: LUMIPAR7QPRO

ACCESSORIES & RELATED PRODUCTS




ARCLUMIL45D38
Optic lens 45°, D.38mm



UPBOXPRO
Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHNICAL DRAWINGS

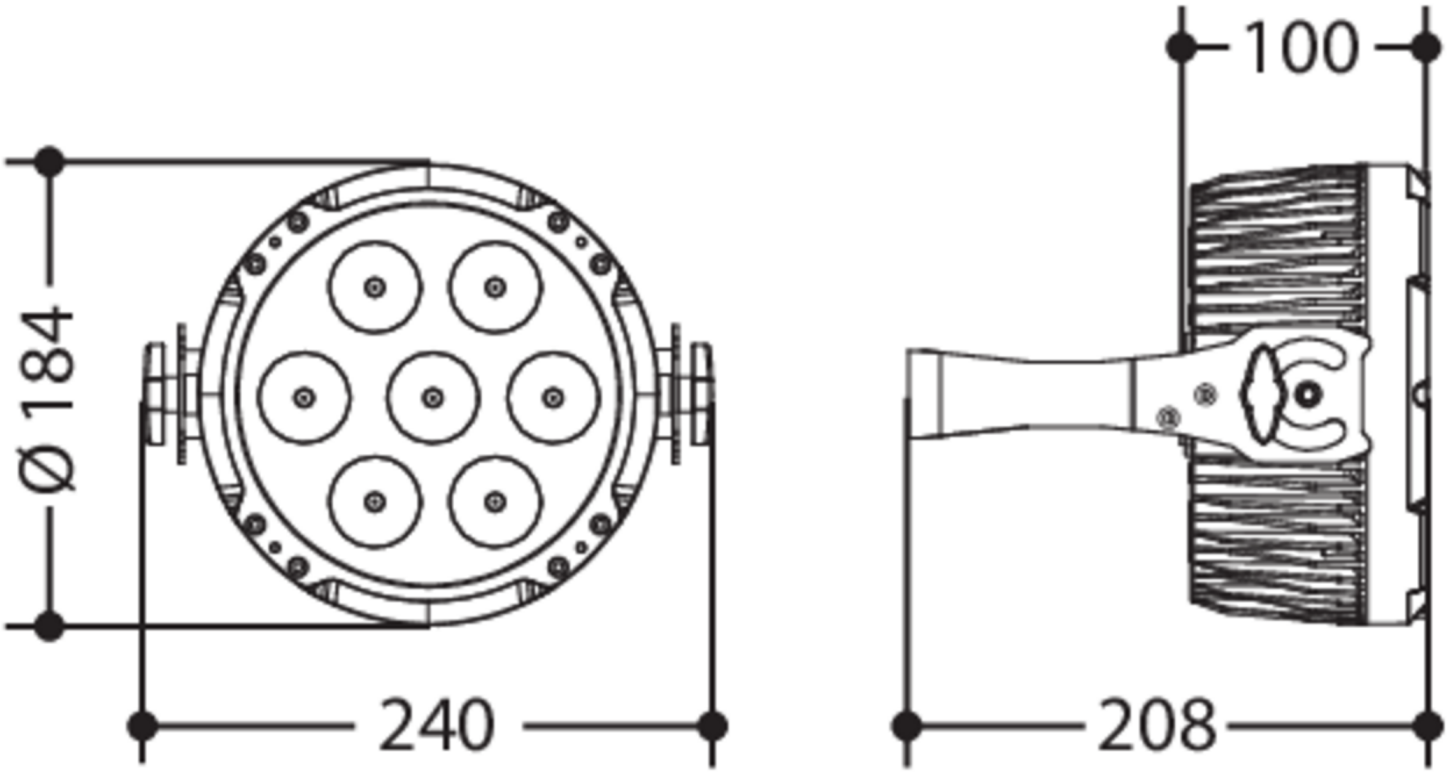

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594