EclMiniProfile TRWD

ORDER CODE: MINIECLTRWDDY2



VERSIONS

	Code	CT	CRI	Lumen
	MINIECLTRWDTU	3.000 K	92	582 lm
	MINIECLTRWDDY	5.700 K	80	743 lm
	**MINIECLTRWDDY2**	**5.700 K**	**89**	**690 lm**

SOURCE
28W White CREE LED

IP RATING
IP20

WEIGHT
1kg / 2.2lbs

LUMINOUS FLUX (MAX)
582 lm

CRI
(TU) >92

Downloaded on 08/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

Source:	28W White CREE LED
Source CCT:	(TU) 3.000 K - (DY) 5.700K
Luminous flux:	(TU) (19°) 563 lm - (26°) 554 lm - (36°) 582 lm - (50°) 552 @Full
Luminous flux:	(DY) (19°) 731 lm - (26°) 729 lm - (36°) 743 lm - (50°) 693 lm @full
Lux:	(TU) (19°) 330 lx - (26°) 180 lx - (36°) 96 lx - (50°) 51lx @5 m full
Lux:	(DY) (19°) 397 lx - (26°) 212 lx - (36°) 107 lx - (50°) 52lx @5 m full
CRI:	(TU) >92; (DY) >80
TLCI:	(TU) >90; (DY) >68
TM30 Rf:	(TU) >90; (DY) >79
TM30 Rg:	(TU) >97; (DY) >97
Source life expectancy:	> 70.000 hrs (L70B10 @Ta 25° C / 77° F)

OPTICS

Beam angle:	optional profile lens 19° / 26° / 36° / 50° (gobo holder included) - wash zoom lens 15°-30°/ 25°-50°
Lens type:	high-quality glass lens optics

DYNAMIC EFFECTS

Manual mode:	manual adjustment of dimmer and strobe

GOBOS

Fixed gobos:	gobo holder included in optics
Gobo size:	E, outer: 37 mm - image: 23 mm - thickness: 1,1 mm

CONTROL

Supported Protocols:	W-DMX
DMX channels:	1 / 2 / 5ch
Display:	LCD display

ELECTRONICS

Dimmer:	linear 0 - 100% electronic dimmer
Dimmer curves:	4 selectable dimming modes available
Strobe / shutter:	1 - 25 Hz, electronic
Selectable PWM:	600 to 25,000 Hz (selectable steps)
Firmware upgrade with:	via DMX with UPBOXPRO/ UPBOX1 (not included)

CONNECTIONS

Power connection:	track adaptor (EUTRAC, STAFF, GLOBAL, IVELA, Eurostandard Plus compatible)
Wireless Connection:	integrated W-DMX receiver

ELECTRICAL

Mains power supply:	100-240V - 50/60Hz
Max power consumption (230V):	22W
Output (at 230V):	43 units on a single power line
Power factor:	>0,40

PHYSICAL

IP rating:	IP20
Cooling:	fan-free with natural convection
Housing:	Sturdy die-cast aluminium body
Finish:	white (RAL 9003)
Operating temperature:	Ta -20 to +45 °C (-4 to +113 °F)
Dimensions (WxHxD):	112x229x226mm
Weight:	1kg

INSTALLATION

Suspension and fixing:	track adapter for suspension and fixing (included)

CERTIFICATIONS / REPORTS

Compliance:	CE, UKCA, RCM

Downloaded on 08/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

BOX CONTENT

1 x MINIECLTRWD

ACCESSORIES & RELATED PRODUCTS



AETHERBOXONE

IP65 1x universe CRMX transceiver, DMX, Ethernet protocols, Wi-Fi, Bluetooth, battery-ready, POE



AETHERBOX

IP65 1 universe CRMX transceiver, DMX and Ethernet protocols, Wi-Fi, Bluetooth and battery ready



MINIECLTRL19

Optics for MINIECLTR profiler, gobo holder included, 19° beam



MINIECLTRL26

Optics for MINIECLTR profiler, gobo holder included, 26° beam



MINIECLTRL36

Optics for MINIECLTR profiler, gobo holder included, 36° beam



MINIECLTRL50

Optics for MINIECLTR profiler, gobo holder included, 50° beam



ECLMINIPHDZL1540W

15° - 40° Zoomable High definition profile lenses for Ecl Mini series, white



ECLMINIPHDZL1020W

10° - 20° Zoomable High definition profile lenses for Ecl Mini series, white



ECLMINIGOBOHINDB

Gobo holder for EclMini with manual adjustable index position system, black



ECLMINIWASHL1530W

Zoomable Wash Lens 15-30° for EclMini, white



ECLMINIWASHL2550W

Zoomable Wash Lens 25-50° for EclMini, white



ECLMINIHSNOOTW

Half Snoot for EclMinix, white



ECLMINIFSNOOTW

Full Snoot for EclMini, white



ECLMINILOUVREW

Anti-glare louvre for EclMini, white




ECLMINIBDNFFW

Barndoor and filter frame (compatible with Wash Lenses - not compatible with Profile lenses) EclMini

Downloaded on 08/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL DRAWINGS

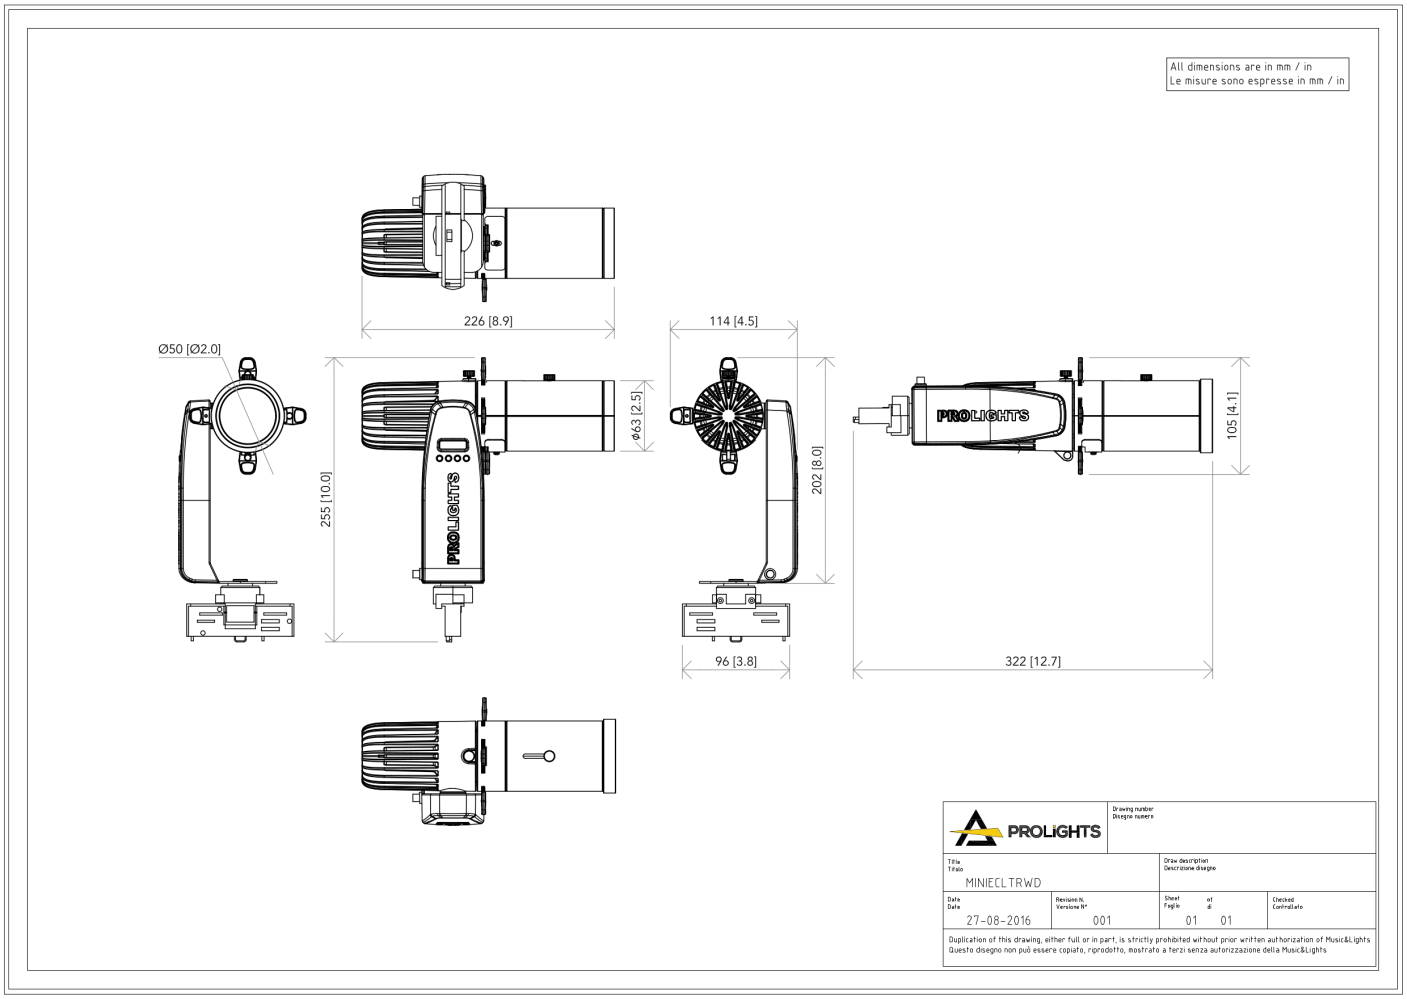

Downloaded on 08/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice