Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

EclMiniProfile WDMX

PROLIGHTS

ORDER CODE: **MINIECLWDDY2**

VERSIONS

Code	CT	CRI	Lumen
MINIECLWDTU	3.000 K	92	582 lm
MINIECLWDDY	5.700 K	80	743 lm
MINIECLWDDY2	**5.700 K**	**89**	**690 lm**

Source

28W White CREE LED

IP rating

IP20

Weight

1kg / 2.2lbs

EclMiniProfile WDMX is a new concept of mini LED ellipsoidal. Showcasing a stylish design, ease of use, precise optics, sharp image projection and bright even projection all in a compact housing that is just a quarter of the size of traditional ellipsoidals. EclMiniProfile WDMX comes with a built-in Wireless DMX (WDMX) module for cable-free operation, extending the possible applications of this light. Designed for applications in commercial installtions, museums, restaurant, churches, educational theatres, and any other installation where size is an important factor. Available in Tungsten and Daylight versions, EclMiniProfile WDMX performs even field projection, high CRI at any level of brightness and linear dimmer over the entire ramp.

MAIN FEATURES

- Bright, compact LED ellipsoidal with sharp optics and wireless DMX control.
- Available with Warm and Cold White High CRI LED sources.
- 19° - 26° - 36° - 50° lens options

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

EclMiniProfile WDMX

ORDER CODE: MINIECLWDDY2

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

- Source: 28W White CREE LED
- Source CCT: (TU) 3.000 K - (DY) 5.700K
- Luminous flux: (TU) (19°) 563 lm - (26°) 554 lm - (36°) 582 lm - (50°) 552 @Full
- Luminous flux: (DY) (19°) 731 lm - (26°) 729 lm - (36°) 743 lm - (50°) 693 lm @full
- Lux: (TU) (19°) 330 lx - (26°) 180 lx - (36°) 96 lx - (50°) 51lx @5 m full
- Lux: (DY) (19°) 397 lx - (26°) 212 lx - (36°) 107 lx - (50°) 52lx @5 m full
- CRI: (TU) >92; (DY) >80
- TLCI: (TU) >90; (DY) >68
- TM30 Rf: (TU) >90; (DY) >79
- TM30 Rg: (TU) >97; (DY) >97
- Source life expectancy: > 70.000 hrs (L70B10 @Ta 25° C / 77° F)

DYNAMIC EFFECTS

- Static mode: selection of static colour
- Manual mode: manual adjustment of dimmer and strobe
- Auto mode: built-in programs with execution speed adjustment

GOBOS

- Fixed gobos: gobo holder Included in optics
- Gobo size: E, outer: 37 mm - image: 23 mm - thickness: 1,1 mm

CONTROL

- Supported Protocols: W-DMX
- DMX channels: 1 / 2 / 5ch
- Display: LCD display

BOX CONTENT

- 1 x MINIECLWD

OPTICS

- Beam angle: optional profile lens 19° / 26° / 36° / 50° (gobo holder included) - wash zoom lens 15°-30°/ 25°-50°
- Lens type: high-quality glass lens optics

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 25 Hz, electronic
- Selectable PWM: 600 to 25,000 Hz (selectable steps)
- Firmware upgrade with:

CONNECTIONS

- Power connection: 16 A Schuko plug
- Wireless Connection: integrated W-DMX receiver

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 22W
- Output (at 230V): 43
- Power factor: >0,40

PHYSICAL

- IP rating: IP20
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: black (RAL 9004)
- Operating temperature: Ta -20 to +45 °C (-4 to +113 °F)
- Dimensions (WxHxD): 112x202x226mm
- Weight: 1kg

CERTIFICATIONS / REPORTS

- Compliance: CE, UKCA, RCM

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

EclMiniProfile WDMX

ORDER CODE: MINIECLWDDY2

ACCESSORIES & RELATED PRODUCTS



RSR0630B
Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black



AETHERBOXONE
IP65 1x universe CRMX transceiver, DMX, Ethernet protocols, Wi-Fi, Bluetooth, battery-ready, POE



AETHERBOX
IP65 1 universe CRMX transceiver, DMX and Ethernet protocols, Wi-Fi, Bluetooth and battery ready



C6002B
Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black



NAKKT3013185
Kit for NAXTSA683 adapter, white



NAKKT3013184
Kit for NAXTSA682 adapter, black



MINIECLL19
Optics for MINIECL profiler, gobo holder included, 19° beam



MINIECLL26
Optics for MINIECL profiler, gobo holder included, 26° beam



MINIECLL36
Optics for MINIECL profiler, gobo holder included, 36° beam



MINIECLL50
Optics for MINIECL profiler, gobo holder included, 50° beam



ECLMINIPHDZL1540B
15° - 40° Zoomable High definition profile lenses for Ecl Mini series, black



ECLMINIPHDZL1020B
10° - 20° Zoomable High definition profile lenses for Ecl Mini series, black



ECLMINIGOBOHINDB
Gobo holder for EclMini with manual adjustable index position system, black



ECLMINIWASHL1530B
Zoomable Wash Lens 15-30° for EclMini, black



ECLMINIWASHL2550B
Zoomable Wash Lens 25-50° for EclMini, black



ECLMINIHSNOOTW
Half Snoot for EclMinix, white



ECLMINIFSNOOTW
Full Snoot for EclMini, white



ECLMINILOUVREB
Anti-glare louvre for EclMini, black




ECLMINIBDNFFB
Barndoor and filter frame (compatible with Wash Lenses - not compatible with Profile lenses) EclMini

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

EclMiniProfile WDMX

ORDER CODE: **MINIECLWDDY2**

TECHNICAL DRAWINGS

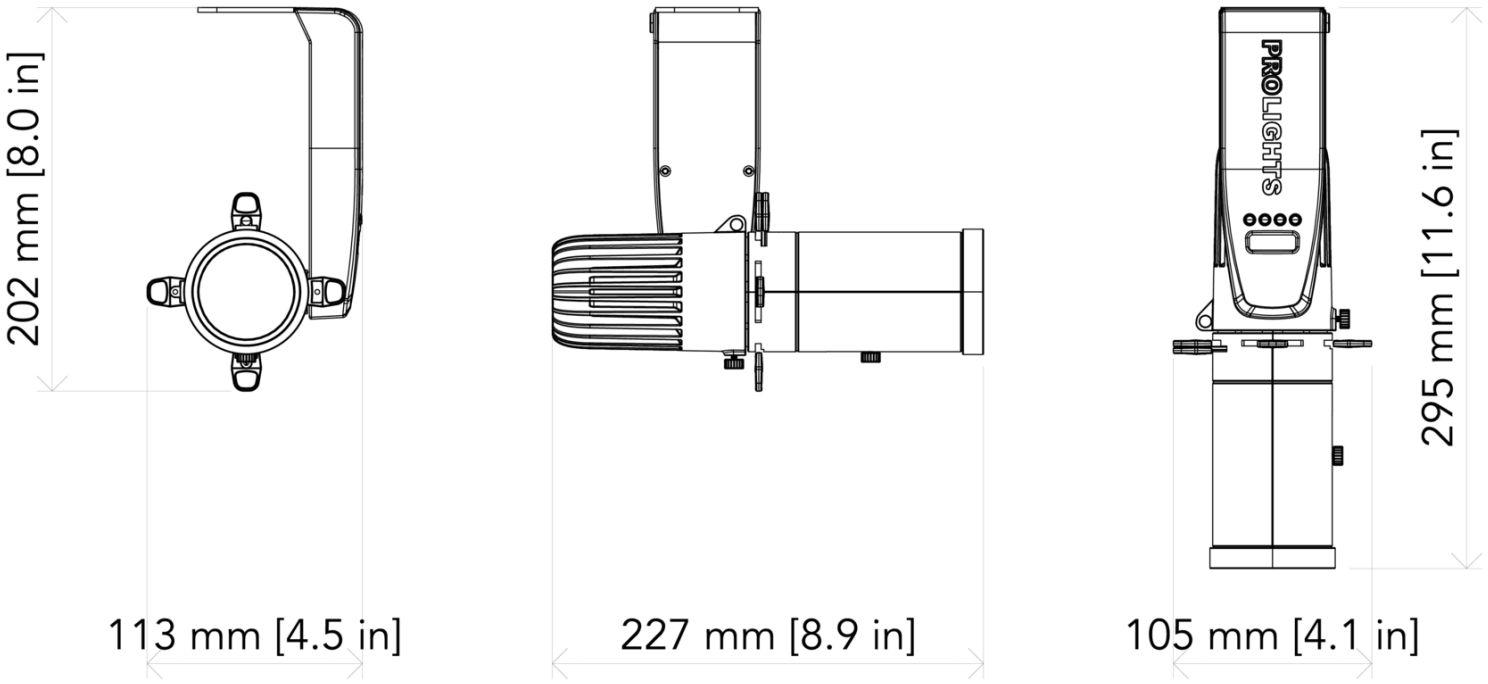

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594