Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Mini **Ruby**

ORDER CODE: **MINIRUBY**



Source

132W S Osram Sirius HRI

IP rating

IP30

Weight

7,6kg / 16.76lbs

Mini Ruby is an ultra-compact beam light that harnesses all the power of its Osram Sirius 132W lamp into a tight, bright and sharp 3,5° beam. Its small form factor is designed to allow the users to apply a discharge beam light in tight locations or low ceilings bringing a big punch to a small space.

MAIN FEATURES

- 9 position colour wheel.
- Compact, lightweight design for use in small spaces.
- Rotating 8 facet prism.

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Mini **Ruby**

PROLIGHTS

ORDER CODE: MINIRUBY

TECHNICAL SPECIFICATIONS

OPTICS

- Beam angle: 3,5°
- Field angle: 3,5°
- Lens diameter: 80mm
- Lens type: high-quality glass lens optics

COLOUR SYSTEM

- Colour wheel: 9 colour filters + open

MOVEMENT

- Pan: 540 / 630° - 8/16-bit resolution
- Tilt: 265° - 8/16-bit resolution
- Position feedback: automatic repositioning after external movement

ELECTRONICS

- Strobe / shutter: 1 - 28 flash(s), mechanical
- Firmware upgrade with: via DMX with UPBOXPRO/UPBOX2 (not included)

PHYSICAL

- IP rating: IP30
- Cooling: heat pipe with low-noise fan
- Housing: Aluminium structure with high-resistance polycarbonate cover
- Finish: black
- Operating temperature: Ta -10 to +45 °C (+14 to +113 °F)
- Dimensions (WxHxD): 278x387x200mm
- Weight: 7,6kg

INSTALLATION

- Suspension and fixing: any position with quick-lock Omega brackets

CERTIFICATIONS / REPORTS

- Compliance: CE, UKCA

LIGHT SOURCE

- Source: 132W S Osram Sirius HRI
- Source CCT: 9.200K
- Luminous flux: 5'150
- Lux: 98'792lx @5 m full
- CRI: 60
- Source life expectancy: 6.000 h

DYNAMIC EFFECTS

- Circular prism: 8-f with bi-directional rotation

CONTROL

- Supported Protocols: DMX512, RDM
- DMX channels: 7 / 9ch
- Display: LCD display
- Hibernation: power safe mode when lost DMX
- Master/Slave: for synchronised operation of more units linked in a chain

CONNECTIONS

- Power connection: Neutrik powerCON IN/OUT connectors
- Signal connection: Amphenol XLR 3p + 5p IN/OUT connectors

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 176W
- Output (at 230V): 12 units on a single power line
- Max power consumption (120V): 176W

BOX CONTENT

- 1 x MINIRUBY
- 1 x 1,5 meters power cable (BARE END - NEUTRIK POWERCON)
- 1 x OS24PLUS

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Mini **Ruby**

ORDER CODE: MINIRUBY

ACCESSORIES & RELATED PRODUCTS



OS24PLUS
Quick-lock omega bracket, M12 hole

TOUR53415L03
Dmx cable HC5340. CANC5MXX XLR 5p->CANC5FXX XLR (f) 5p, L.3m



958025L03
3x2.5mm TH07 Cable, 20A 3p PwCon FCA, 20A 3p PwCon FCB, L. 3m



9513FCAL03
Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FCA socket, L.3m



9533FCAL03
Ass. 3x2.5mm TH07 cable, SCHUKO plug, MENAC3FCA socket, L.3m



RSR0630B
Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black



C6016B
Selflock slim clamp, 250Kg load, 48-51mm tubes, M10 bolt incl, Black&White& White



FCLMINIRUBY
Flight case for 6 pcs of MINIRUBY




UPBOXPRO
Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Mini **Ruby**

ORDER CODE: MINIRUBY

TECHNICAL DRAWINGS

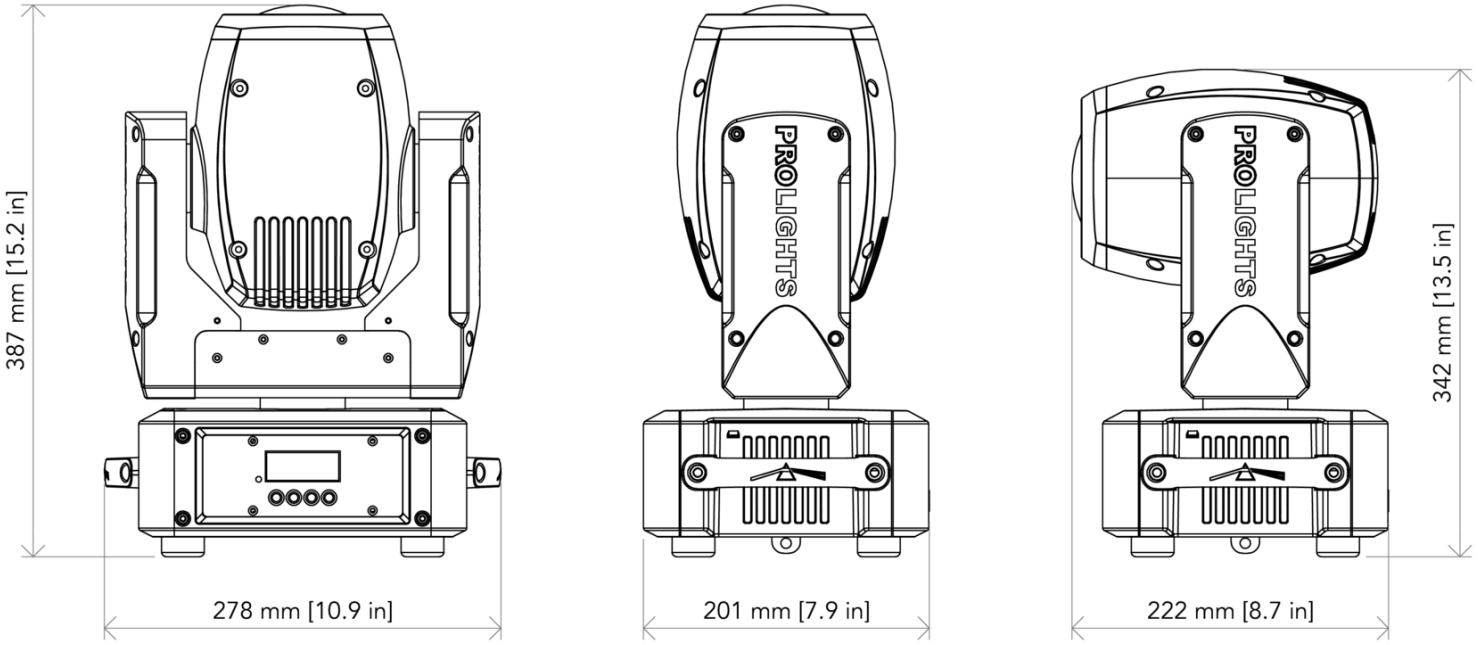

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594