Mini **VersaPar**

ORDER CODE: MINIVERSAPAR



SOURCE	ZOOM RANGE	IP RATING
7x10W RGBW LEDs	**10° - 40° motorised linear zoom**	**IP30**

WEIGHT	LUMINOUS FLUX (MAX)
4kg / 8.82lbs	**1'012 lm**

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

Source:	7x10W RGBW LEDs
Luminous flux:	(10°) 1'012 lm - (40°) 1'335
Lux:	(10°) 4'415 lx - (40°) 378lx @3 m
Source life expectancy:	> 50.000 h

OPTICS

Zoom range:	10° - 40° motorised linear zoom
Lens type:	honeycomb gapless plano-convex optics

COLOUR SYSTEM

White presets:	2.800 K - 10.000K
Colour wheel:	virtual colour wheel with macros
Macros:	several pre-built pixel macros with adjustable speed

DYNAMIC EFFECTS

Static mode:	selection of static colour
Manual mode:	manual adjustment of colour
Auto mode:	built-in programs with execution speed adjustment
Sound mode:	music activation through internal microphone and sensitivity control

CONTROL

Supported Protocols:	DMX512
DMX channels:	5 / 7 / 10ch
Display:	4 chars display
Master/Slave:	for synchronised operation of more units linked in a chain

ELECTRONICS

Dimmer:	linear 0 - 100% electronic dimmer
Dimmer curves:	selectable dimming modes available
Strobe / shutter:	1 / 28 Hz, electronic
Firmware upgrade with:	via DMX with UPBOXPRO/ UPBOX1 (not included)

CONNECTIONS

Power connection:	Seetronic powerCON IN/OUT connectors
Signal connection:	XLR 3p + 5p IN/OUT connectors
Wireless Connection:	optional WIBOX, WDBOX proprietary protocol
Data:	USB-A port for USB WIFI transmitter (optional)

ELECTRICAL

Mains power supply:	100-240V - 50/60Hz
Max power consumption (230V):	69,2W
Output (at 230V):	20 units on a single power line
Max power consumption (120V):	70W
Output (at 120V):	11 units on a single power line

PHYSICAL

IP rating:	IP30
Cooling:	forced-air with low-noise fan
Housing:	Sturdy die-cast aluminium body
Finish:	black
Operating temperature:	Ta -10 to +40 °C (+14 to +104 °F)
Dimensions (WxHxD):	235xx301x223mm
Weight:	4kg

CERTIFICATIONS / REPORTS

Compliance:	CE, UKCA, RCM

BOX CONTENT

1 x MINIVERSAPAR

1 x 1,5 meters power cable (BARE END - SEETRONIC power connector)

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

ACCESSORIES & RELATED PRODUCTS



WIFIUSB


USB Wi-Fi transreceiver, compatible with WIFIBOX and WDBOX



UPBOXPRO

Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHNICAL DRAWINGS

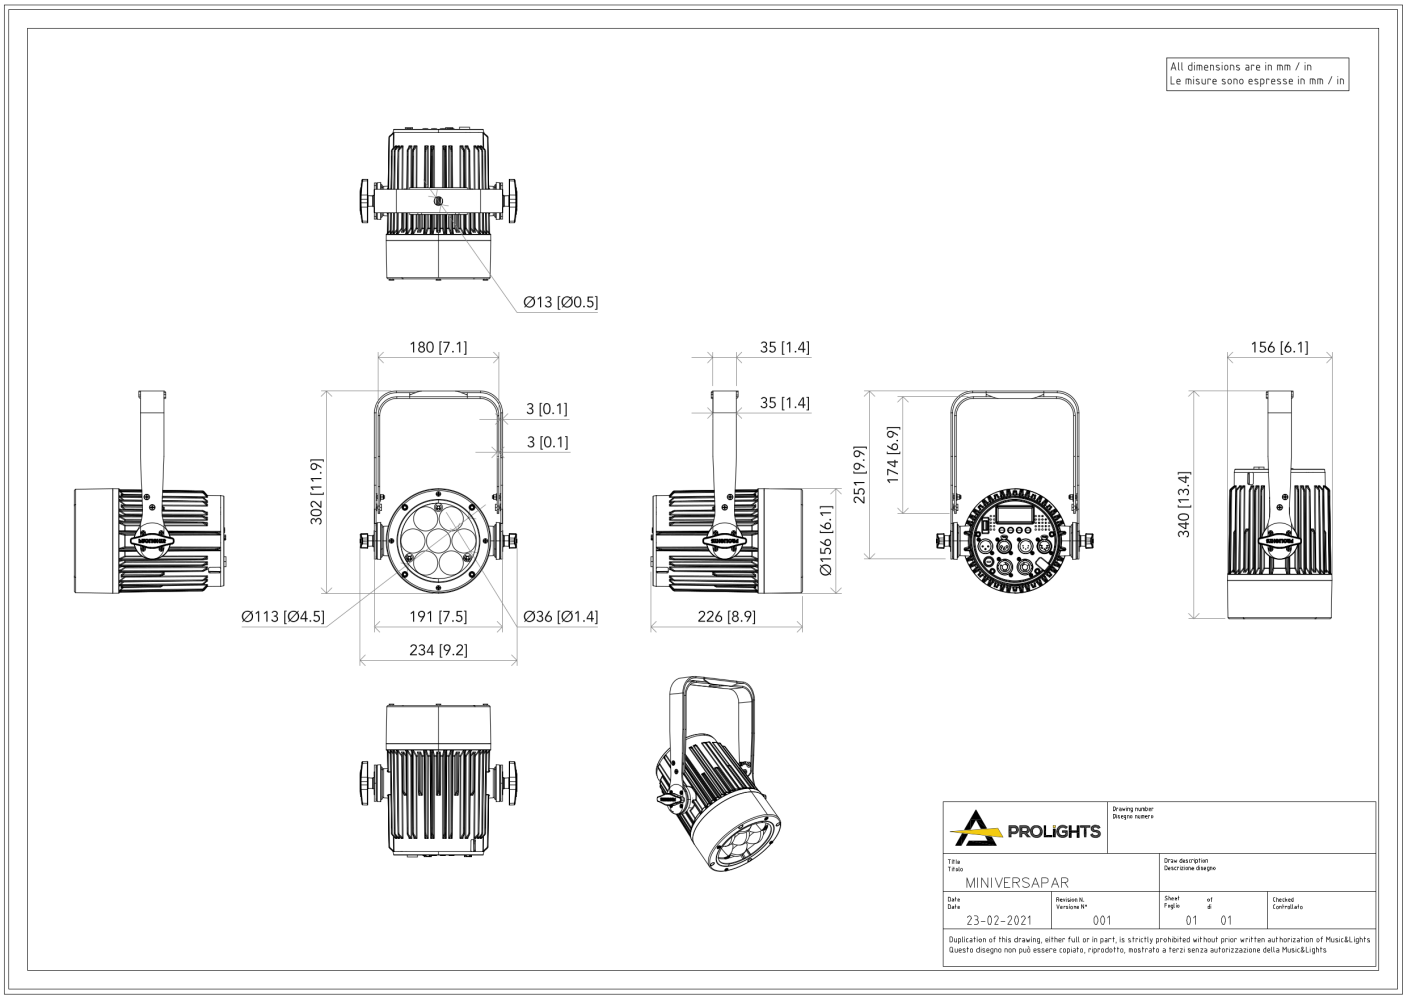

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice