Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

PanoramaIP Spot

ORDER CODE: PANORAMAIPSPOT



Source

420W high-power white LED

Zoom range

5° - 50° motorised linear zoom

IP rating

IP65 for temporary outdoor use

Weight

38kg / 83.78lbs

PanoramaIP Spot is a powerful and flexible IP65 rated moving LED spot designed to deliver a stunning brightness level, all packaged in a compact housing. Equipped with a 1:10 zoom and a complete feature set, PanoramaIP Spot really stands out in any environment, from festivals and arenas to large outdoor events.

MAIN FEATURES

- IP65 rated for outdoor events and temporary installations.
- 420 W high power LED with 7.000 K CT and 5° - 50° linear zoom.
- Extensive range of effects including linear CMY and CTO mixing, colour wheel, rotating gobo wheel, static gobo wheel, circular prisms, linear frost and focus.

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

PanoramaIP Spot

PROLIGHTS

ORDER CODE: PANORAMAIPSPOT

TECHNICAL SPECIFICATIONS

DYNAMIC EFFECTS

- Circular prism: 3-f with bi-directional rotation, indexing
- Frost: linear 0-100%
- Iris: 5 - 100% motorised iris

CONTROL

- Supported Protocols: DMX512, RDM, Art-Net, W-DMX
- DMX channels: 19 / 21 / 28 / 29 / 36ch
- RDM: for remote addressing and parameter configuration
- Display: LCD high resolution colour display
- Hibernation: power safe mode when lost DMX

MOVEMENT

- Pan: 540 - 630° - 8/16-bit resolution
- Tilt: 233° - 8/16-bit resolution
- Position feedback: automatic repositioning after external movement
- Pan / tilt lock: for transport and maintenance

CONNECTIONS

- Power connection: Seetronic powerCON waterproof IN/OUT connectors
- Signal connection: Amphenol XLR 5p IN/OUT connectors
- Wireless Connection: integrated W-DMX receiver
- Data connection: Art-Net RJ45 IN/OUT

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 492W
- Max power consumption (120V): 501W

PHYSICAL

- IP rating: IP65 for temporary outdoor use
- Cooling: heat pipe with low-noise fan
- Housing: Aluminium structure with high-resistance polycarbonate cover
- Finish: black
- Operating temperature: Ta -20 to +40 °C (-4 to +104 °F)
- Dimensions (WxHxD): 441x740x315mm
- Weight: 38kg

CERTIFICATIONS / REPORTS

- Compliance: CE, UKCA, RCM

LIGHT SOURCE

- Source: 420W high-power white LED
- Source CCT: 7.000K
- Lux: (5°) 21'362lx @5 m full
- Lux: (50°) 1'173lx @5 m full
- Source life expectancy: > 20.000 h

OPTICS

- Zoom range: 5° - 50° motorised linear zoom
- Lens diameter: 120mm
- Lens type: HD anti-reflection lenses with achromatic coating
- Focus: motorised with auto-focus

COLOUR SYSTEM

- Colour mixing: linear CMY
- CCT: linear CTO correction 2.700 K ~ 6.000 K
- Colour wheel: 8 colour filters + open

GOBOS

- Gobo wheel 1: 7 rotating gobos + open, interchangeable, indexing
- Gobo size: outer: 26,9 mm - image: 19 mm - max thickness: 2 mm
- Fixed gobos: 6 fixed gobos + open, interchangeable
- Gobo size: outer: 26,9 mm - image: 19 mm - max thickness: 0,5 mm

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Strobe / shutter: 1 - 28 Hz, electronic
- Display battery: included, self-charging battery backup
- Firmware upgrade with: via DMX with UPBOXPRO/UPBOX2 (not included)

INSTALLATION

- Suspension and fixing: any position with quick-lock Omega brackets

BOX CONTENT

- 1 x PANORAMAIPSPOT
- 1 x 1,5 meters power cable (BARE END - SEETRONIC IP65 power connector)
- 2 x OSIPPLUS
- 1 x Antenna

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

PanoramaIP Spot

ORDER CODE: **PANORAMAIPSPOT**

ACCESSORIES & RELATED PRODUCTS



OSIPPLUS
IP65 quick-lock omega bracket compatible with IP65 moving heads, M12 hole



AETHERBOXONE
IP65 1x universe CRMX transceiver, DMX, Ethernet protocols, Wi-Fi, Bluetooth, battery-ready, POE



AETHERBOX
IP65 1 universe CRMX transceiver, DMX and Ethernet protocols, Wi-Fi, Bluetooth and battery ready



C6016B
Selflock slim clamp, 250Kg load, 48-51mm tubes, M10 bolt incl, Black&White& White





OSIPD13
IP65 quick-lock omega bracket compatible with IP65 moving heads, M12 hole




UPBOXPRO
Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHNICAL DRAWINGS

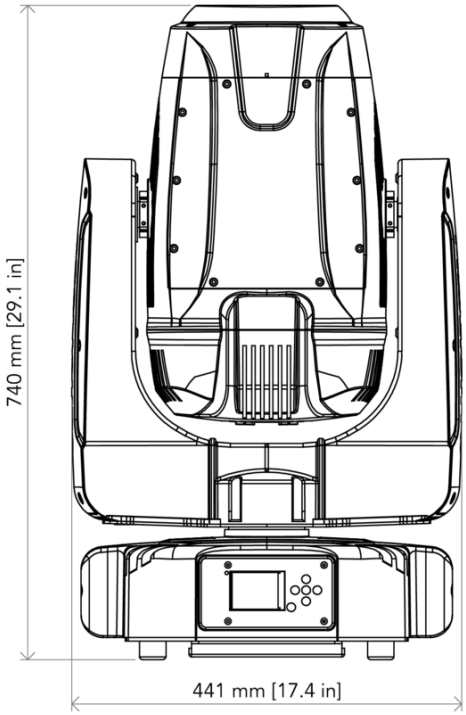

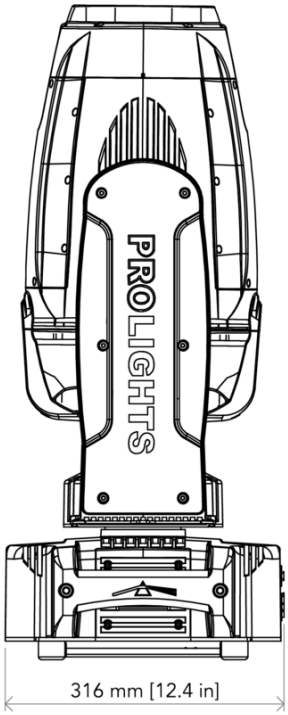

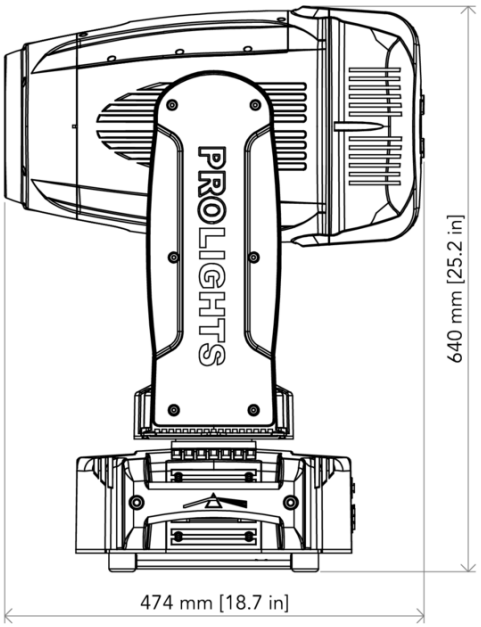

MUSIC & LIGHTS S.r.l. | Via A. Olivetti, snc 04026 - Minturno (LT) ITALY | info@prolights.it Tel: +39 0771 72190 | **prolights.it** VAT No. IT 02057590594