Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Smart BatIP

ORDER CODE: SMARTBATIP



Source

4x8W RGBW LEDs

IP rating

IP54 for temporary outdoor use

Weight

3,6kg / 7.94lbs

Smart BatIP is the new waterproof version of the highly popular Smart Bat, expanding the possible application of this versatile luminaire to outdoor venues or for architectural applications. Smart BatIP is equipped with a lithium battery pack and a built-in Wi-Fi module for cable-free operation. The transmission of the DMX signal is through Wi-Fi, the transmission unit WIFIBOX is compatible with any DMX controller or through the mobile app SmartColors available for any Android or IOS device.

MAIN FEATURES

- IP54 for temporary outdoor use
- W-DMX: built-in Wi-Fi receiver
- Adjustable foot support for tilt regulation (up to 20°)
- Ergonomic carrying handle for transportation and positioning
- SmartColors app for iOS and Android
- Battery life: 12 hours (colour change mode)

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Smart BatIP

PROLIGHTS

ORDER CODE: SMARTBATIP

TECHNICAL SPECIFICATIONS

COLOUR SYSTEM

- White presets: 3200 K ~ 10.000K
- Colour wheel: virtual colour wheel with macros

DYNAMIC EFFECTS

- Static mode: selection of static colour
- Manual mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 25 Hz, electronic
- Firmware upgrade with: via DMX with UPBOXPRO/UPBOX1 (not included)

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption (230V): 43W

PHYSICAL

- IP rating: IP54 for temporary outdoor use
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: black
- Operating temperature: Ta 0 to +40 °C (+32 to +104 °F)
- Dimensions (WxHxD): 138x191x145mm
- Weight: 3,6kg

CERTIFICATIONS / REPORTS

- Compliance: CE, UKCA, RCM

BOX CONTENT

- 1 x SMARTBATIP
- 1 x 1,5 meters BARE END - IEC power cable
- 1 x LUMIPARIRCH

LIGHT SOURCE

- Source: 4x8W RGBW LEDs
- Lux: 980lx @3 m full
- Source life expectancy: > 50.000 h

OPTICS

- Beam angle: 23°
- Lens diameter: 42mm
- Additional optics: 25° and 45° optional

CONTROL

- Supported Protocols: DMX512
- DMX channels: 4 / 6 / 10ch
- Display: LED display user interface
- IR: infrared sensor controlled by remote
- Master/Slave: for synchronised operation of more units linked in a chain

MOVEMENT

- Tilt: (up to) 20° with adjustable foot support

BATTERY

- Battery: 11,1V lithium
- Battery life in colour change mode up to: 12h
- Battery life in full-mode up to: 6h
- Recharge connection: power cable
- Recharge time: 5h (max)
- Battery level indicator: shown on display

CONNECTIONS

- Power connection: IEC 10 A IN
- Wireless Connection: integrated WIBOX, WDBOX proprietary protocol

INSTALLATION

- Mounting points: M12 threaded mounting points

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Smart BatIP

ORDER CODE: SMARTBATIP

ACCESSORIES & RELATED PRODUCTS



LUMIPARIRCH

RGBWA IR remote controller, manual / auto modes, for LUMIPAR IR series



C6018B

Selflock slim clamp, 200 kg load, 48-80 mm tubes, M12 bolt incl, black



RSR0630B

Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black



WIFIBOX

DMX controller interface, Wi-Fi/DMX IN, Wi-Fi / DMX OUT



WDBOX

Wireless DMX Transceiver, IN/OUT 3-pin XLR, distance 200m, 2.4 GHz, 0.6 kg



FCLSMARTBAT

Flight case for 9 SMARTBAT, 613x480x507 mm, 22 kg



SMARTCOVERMR

Mirror housing for SMARTBAT projectors.



SMARTBATCOVER

Nylon rain-proof cover for SMARTBAT projector



SMARTBATBAGI

New nylon bag high resistance to contain 4 pcs SMARTBAT projectors.



ARCLUMIL25D42

Optic lens 25°, D.42mm



ARCLUMIL45D42


Optic lens 45°, D.42mm

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Smart BatIP

ORDER CODE: SMARTBATIP

TECHNICAL DRAWINGS

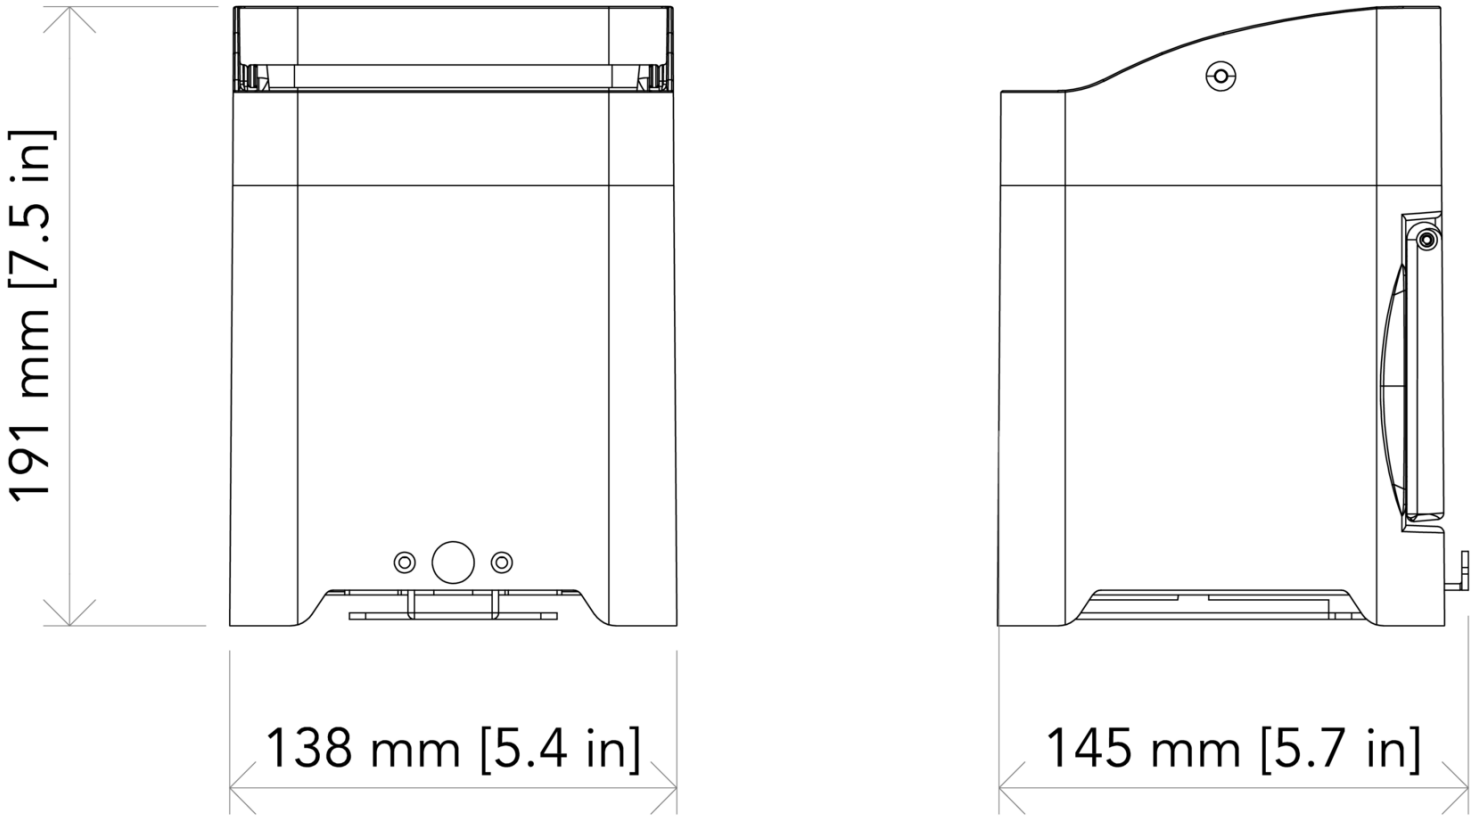

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594