Downloaded on 05/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Smart BookPack

PROLIGHTS

ORDER CODE: SMARTBOOKPACK

VERSIONS

	Code	Smartbook	Recharging flight case	IRC	AC cable
	SMARTBOOK1	1	No	No	No
	**SMARTBOOKPACK**	**4**	**1**	**1**	**1**

Source

96x3W RGBW LEDs

IP rating

IP65 for temporary outdoor use

Weight

8,4kg / 18.52lbs

Pack with 4 SMARTBOOK1, battery charger flight-case, IR controller, AC cable.

Smart Book is a wireless battery wash light, performing high output in a super-slim foldable housing. Smart Book, being IP rated, is an ideal tool for outdoor events to light up landscapes and buildings, all with a magnetic optical system (+50° included) to focus the light. Smart Book comes with a quick magnetic recharge flight case and control through wireless DMX.

MAIN FEATURES

- 96x3W RGBW / FC LED and with included +50° magnetic filter
- IP rated for outdoor events and with tiltable head
- Wireless DMX built-in receiver

Downloaded on 05/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Smart BookPack

PROLIGHTS

ORDER CODE: SMARTBOOKPACK

TECHNICAL SPECIFICATIONS

OPTICS

- Beam angle: without filter: 24° - with 50° filter: 35° - with 60x10° filter: 40x24°
- Field angle: without filter: 40° - with 50° filter: 70° - with 60x10° filter: 81x45°
- Additional optics: magnetic 60x10° asymmetric filter (optional)
- Other: magnetic +50° filter (included)

DYNAMIC EFFECTS

- Static mode: selection of static colour
- Manual mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Firmware upgrade with: via DMX with UPBOX1U (not included)

BATTERY

- Battery: 26 A h - 18,5V
- Battery life in colour change mode up to: 12h
- Battery life in single colour mode up to: 12h
- Battery life in full-mode up to: 9h
- Recharge connection: magnetic fast-charge in case
- Recharge time: 7h (max)
- Battery level indicator: shown on display

ELECTRICAL

- Max power consumption (230V): 424W
- Max power consumption (120V): 426W

CERTIFICATIONS / REPORTS

- Compliance: CE, UKCA, RCM

LIGHT SOURCE

- Source: 96x3W RGBW LEDs
- Luminous flux: without filter: 3'019,9 lm - with 50° filter: 2'117 lm - with 60x10° filter: 2'261
- Lux: without filter: 1'593 lx - with 50° filter: 404 lx - with 60x10° filter: 608lx @3 m full
- Source life expectancy: > 50.000 h

COLOUR SYSTEM

- Colour wheel: virtual colour wheel with macros

CONTROL

- Supported Protocols: W-DMX
- DMX channels: 4 / 6 / 10ch
- Display: Graphic User Interface
- IR: infrared sensor controlled by remote
- Master/Slave: for synchronised operation of more units linked in a chain

MOVEMENT

- Tilt: 0 - 90° with manual adjustment

CONNECTIONS

- Power connection: quick lock magnetic fast charge connector
- Wireless Connection: integrated W-DMX receiver
- Data connection: W-DMX receiver

PHYSICAL

- IP rating: IP65 for temporary outdoor use
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: black
- Operating temperature: Ta 0 to +45 °C (+32 to +113 °F)
- Dimensions (WxHxD): 395x213x101mm
- Weight: 8,4kg

Downloaded on 05/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Smart BookPack

ORDER CODE: SMARTBOOKPACK

ACCESSORIES & RELATED PRODUCTS



RSR0630B
Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black



AETHERBOXONE
IP65 1x universe CRMX transceiver, DMX, Ethernet protocols, Wi-Fi, Bluetooth, battery-ready, POE



AETHERBOX
IP65 1 universe CRMX transceiver, DMX and Ethernet protocols, Wi-Fi, Bluetooth and battery ready



C6002B
Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black&White& White



SBOOKPOWER
IP65 battery charger for SMARTBOOK



SBOOKBD
Black&White& White barn door 4 directional flaps to adjust the light beam





SBUPBOXI
Interface between UPBOX1 and SMARTBOOK for make firmware upgrade




PRL-IRC
RGBWA IR controller, 29 buttons, manual/static colours, auto programs, fade

TECHNICAL DRAWINGS

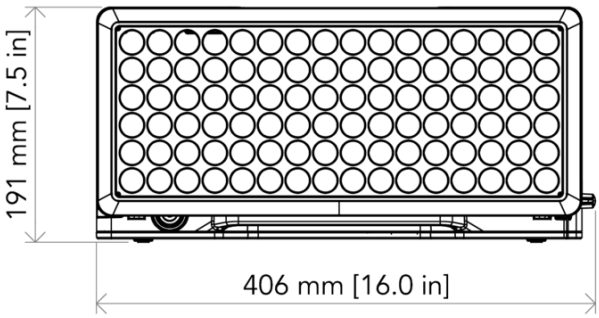





MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594