SunRise 4

ORDER CODE: SUNRISE4



SOURCE	IP RATING	WEIGHT
4x100W White COB LEDs	**IP30**	**10,9kg / 24.03lbs**

Downloaded on 17/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

Source:	4x100W White COB LEDs
Source CCT:	3.000K
Luminous flux:	22'594 @Full
Lux:	957lx @5 m full
Source life expectancy:	> 50.000 h

OPTICS

Beam angle:	58°
Field angle:	85°
Lens type:	HD anti-reflection lenses with achromatic coating

DYNAMIC EFFECTS

Pixel patterns:	pre-programmed static and dynamic pixel patterns
Static mode:	selection of static colour
Manual mode:	manual adjustment of colour
Auto mode:	built-in programs with execution speed adjustment

CONTROL

Supported Protocols:	DMX512
DMX channels:	4 / 6 / 9ch
Pixel control:	pixel2pixel control
RDM:	for remote addressing and parameter configuration
Display:	Graphic User Interface
Master/Slave:	for synchronised operation of more units linked in a chain

ELECTRONICS

Dimmer:	linear 0 - 100% electronic dimmer
Dimmer curves:	4 selectable dimming modes available
Strobe / shutter:	1 - 28 Hz, electronic
Selectable PWM:	600 to 25,000 Hz (selectable steps)
Firmware upgrade with:	via DMX with UPBOXPRO/ UPBOX1 (not included)

CONNECTIONS

Power connection:	Neutrik powerCON IN/OUT connectors
Signal connection:	XLR 3p + 5p IN/OUT connectors

INSTALLATION

Suspension and fixing:	bracket for hanging and floor positioning

ELECTRICAL

Mains power supply:	100-240V - 50/60Hz
Max power consumption (230V):	325W
Output (at 230V):	8 units on a single power line
Power factor:	> 0,95

PHYSICAL

IP rating:	IP30
Cooling:	forced-air with low-noise fan
Housing:	Sturdy aluminium profile
Finish:	black
Operating temperature:	Ta -10 to +45 °C (+14 to +113 °F)
Dimensions (WxHxD):	466x454x128mm
Weight:	10,9kg

CERTIFICATIONS / REPORTS

Compliance:	CE, UKCA, RCM

BOX CONTENT

1 x SUNRISE4

1 x 1,5 meters power cable (BARE END - NEUTRIK POWERCON)

Downloaded on 17/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice


ACCESSORIES & RELATED PRODUCTS



UPBOXPRO


Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHNICAL DRAWINGS

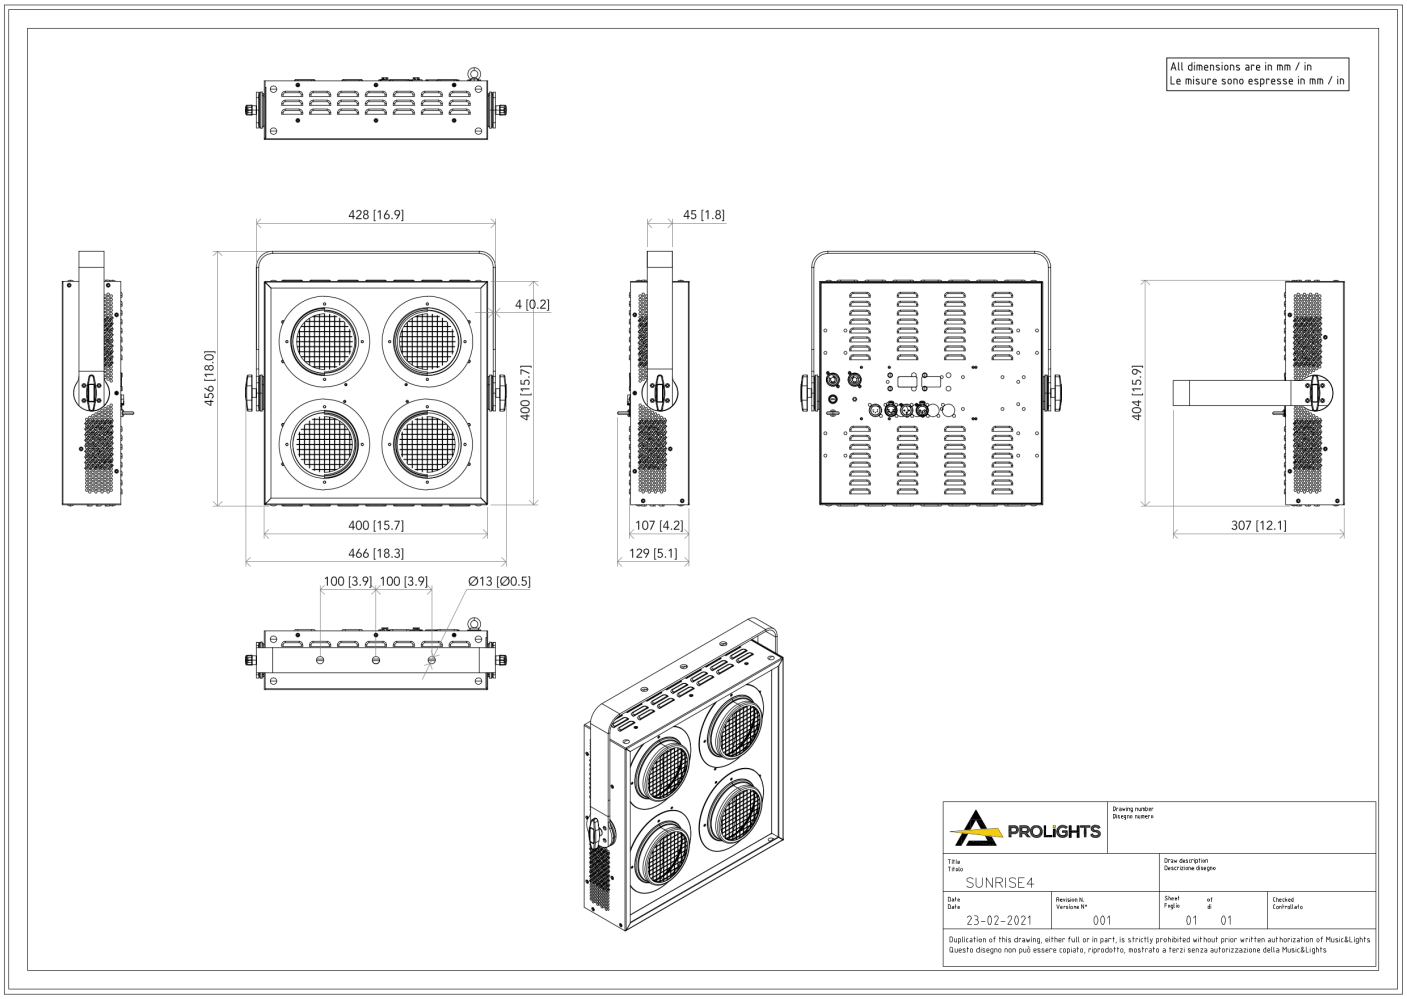

PHOTOMETRICS

Full On - Native

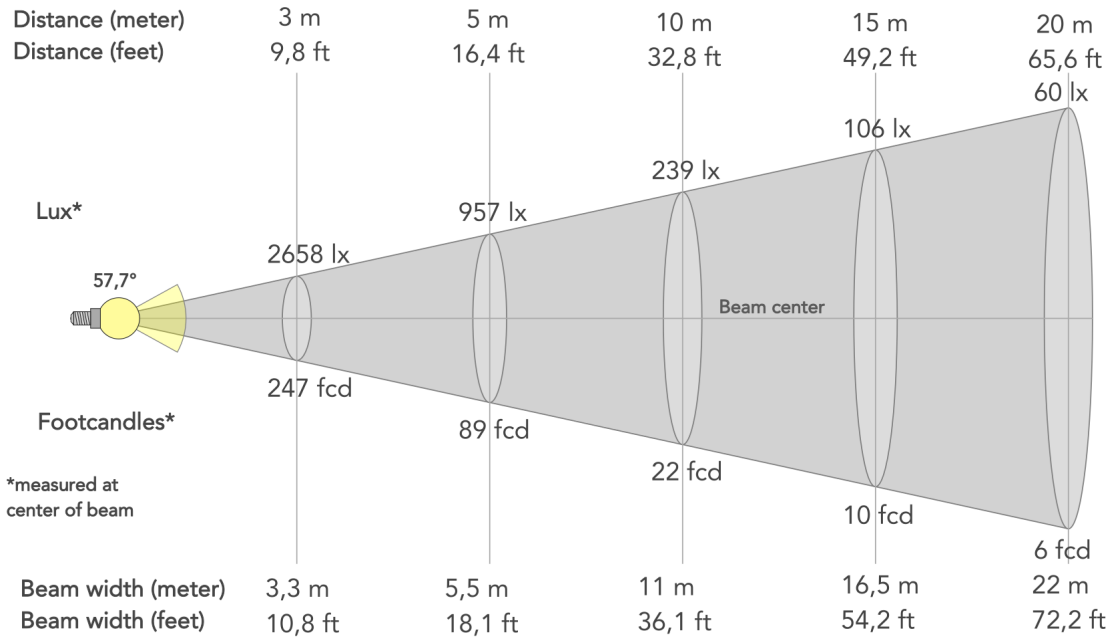

Beam angle (50%): **57.7°**	Field angle (10%): **85.2°**	Cut-off angle (2.5%): **112.1°**