Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Tabled C

PROLIGHTS

ORDER CODE: TABLED-CPACKWH

VERSIONS

	Code	Tabled	Extensions	Bases	Recharger	IRC	Certifications
	TABLED-C	x1	No	x1 TABLEDDSK22W	1x1	No	CE, UKCA, RCM
	TABLED-CPACK	x4	x2 TABLEDEXT-027	x4 TABLEDDSK22W	1x4	x1	CE, UKCA, RCM
	**TABLED-CPACKWH**	**x4**	**x2 TABLEDEXT-027WH**	**x4 TABLEDDSK22W**	**1x4**	**x1**	**CE, UKCA, RCM**

Source

6x3 W + 6x1W RGB + Neutral White

IP rating

IP30

Weight

1,18kg / 2.6lbs

Tabled C is an ingenious product which offers beautiful table lighting for events whilst keeping the atmosphere of the room. Based on a stunning aesthetic design, it is not only a stylish centerpiece but fast to deploy and easy to use. With local control and wireless DMX, it can either act as a standalone table light or be part of a spectacular event lighting package.

MAIN FEATURES

- Battery powered and wireless DMX control for fast deployment and accurate control
- RGBW LED source with 360° coverage for standard catering round tables of 1,8 m
- Available in a TABLEDPACK featuring 4 lights with accessories in an ABS case

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Tabled C

PROLIGHTS

ORDER CODE: TABLED-CPACKWH

TECHNICAL SPECIFICATIONS

DYNAMIC EFFECTS

- Static mode: selection of static colour
- Manual mode: manual adjustment of colour

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Firmware upgrade with: via DMX with UPBOX1U (not included)

BATTERY

- Battery: 2,20 Ah - 14,8V lithium
- Battery life in colour change mode up to: 14,5h
- Battery life in single colour mode up to: R: 19 h - G: 17,5 h - B: 17,5 h - W: 17,5h
- Battery life in full-mode up to: 9h
- Recharge connection: power cable fast-charge in pelican case
- Recharge time: 4h (max)
- Battery level indicator: shown on display

ELECTRICAL

- Mains power supply: DC 24 V - 1 A
- Max power consumption (230V): 8,8W

CERTIFICATIONS / REPORTS

- Compliance: CE, UKCA, RCM

BOX CONTENT

- 4 x TABLED-C
- 2 x TABLEDEXT-027
- 4 x TABLEDDSK22W
- 1 x Charger for 4 Tab

LIGHT SOURCE

- Source: 6x3 W + 6x1W RGB + Neutral White
- Source CCT: NW 4.000K
- CRI: 80
- Source life expectancy: > 50.000 h

OPTICS

- Beam angle: 360° designed to light up standard 160/180 cm ceremony tables

CONTROL

- Supported Protocols: W-DMX
- DMX channels: 4 / 7 / 10 / 12ch
- Display: Graphic User Interface
- IR: infrared sensor controlled by remote (included in the pack, not included in single unit)

CONNECTIONS

- Wireless Connection: integrated W-DMX receiver
- Data connection: W-DMX receiver

PHYSICAL

- IP rating: IP30
- Housing: Sturdy die-cast aluminium body
- Finish: white (RAL 9003) or mirror
- Operating temperature: Ta 0 to +45 °C (+32 to +113 °F)
- Dimensions (WxHxD): 140x307x220mm
- Weight: 1,18kg

INSTALLATION

- Suspension and fixing: magnetic base to attach on every metal surface
- Hardware on-board: magnetic base

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Tabled C

ORDER CODE: TABLED-CPACKWH

ACCESSORIES & RELATED PRODUCTS



RSR0630B
Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black



AETHERBOXONE
IP65 1x universe CRMX transceiver, DMX, Ethernet protocols, Wi-Fi, Bluetooth, battery-ready, POE



AETHERBOX
IP65 1 universe CRMX transceiver, DMX and Ethernet protocols, Wi-Fi, Bluetooth and battery ready



C6002B
Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black



PRL-IRC
RGBWA IR controller, 29 buttons, manual/static colours, auto programs, fade

TABLEDDSK22W
White disk for TABLED, D 220 mm



TABLEDDSK22MT
Transparent disk with magnet for TABLED, D 220 mm

TABLEDDSK28MW
White disk with magnet for TABLED, D 280 mm


TABLEDDSK40MW
White disk with magnet for TABLED, D 400 mm

Downloaded on 06/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

Tabled C

ORDER CODE: TABLED-CPACKWH

TECHNICAL DRAWINGS

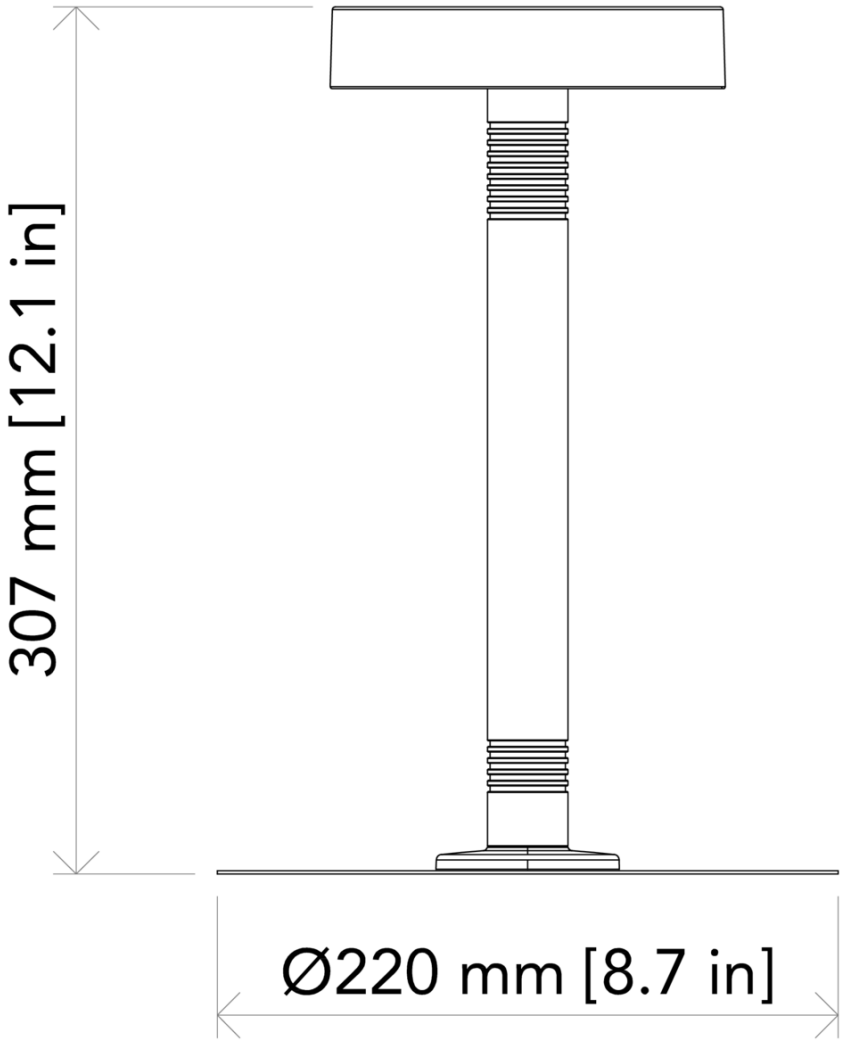

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594