VersaPar

ORDER CODE: VERSAPAR



SOURCE	ZOOM RANGE	IP RATING
12x10W RGBW LEDs	**10° - 60° motorised linear zoom**	**IP30**

WEIGHT	LUMINOUS FLUX (MAX)
5,5kg / 12.13lbs	**1'450 lm**

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

Source:	12x10W RGBW LEDs
Luminous flux:	(10°) 1'450 lm - (60°) 1'786
Lux:	(10°) 3'144 lx - (60°) 249lx @5 m full
Source life expectancy:	> 50.000 h

OPTICS

Zoom range:	10° - 60° motorised linear zoom
Lens type:	plano-convex lens path

COLOUR SYSTEM

Colour wheel:	virtual colour wheel with macros
Macros:	built-in white presets

DYNAMIC EFFECTS

Static mode:	selection of static colour
Manual mode:	manual adjustment of colour
Auto mode:	built-in programs with execution speed adjustment

CONTROL

Supported Protocols:	DMX512
DMX channels:	5 / 7 / 10ch
Display:	Graphic User Interface
Master/Slave:	for synchronised operation of more units linked in a chain

ELECTRONICS

Dimmer:	linear 0 - 100% electronic dimmer
Dimmer curves:	4 selectable dimming modes available
Strobe / shutter:	1 - 28 Hz, electronic
Selectable PWM:	600 to 25,000 Hz (selectable steps)
Firmware upgrade with:	via DMX with UPBOXPRO/ UPBOX1 (not included)

CONNECTIONS

Power connection:	Neutrik powerCON IN/OUT connectors
Signal connection:	XLR 3p + 5p IN/OUT connectors

ELECTRICAL

Mains power supply:	100-240V - 50/60Hz
Max power consumption (230V):	120W
Output (at 230V):	15 units on a single power line
Power factor:	> 0,94

PHYSICAL

IP rating:	IP30
Cooling:	forced-air with low-noise fan
Housing:	Sturdy die-cast aluminium body
Finish:	black
Operating temperature:	Ta -10 to +40 °C (+14 to +104 °F)
Dimensions (WxHxD):	262x350x261mm
Weight:	5,5kg

INSTALLATION

Suspension and fixing:	double bracket for hanging and floor positioning

CERTIFICATIONS / REPORTS

Compliance:	CE, UKCA, RCM

BOX CONTENT

1 x VERSAPAR

1 x 1,5 meters 3G1,5mmq power cable (BARE END - NEUTRIK POWERCON power connector)

Downloaded on 09/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

ACCESSORIES & RELATED PRODUCTS



FCLPAR4190

Flight case for 8 STUDIOCOB, VERSAPAR



STUDIOCOBBD


Barn door 4 directional flaps to adjust the light beam, f. frame included



UPBOXPRO


Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHNICAL DRAWINGS

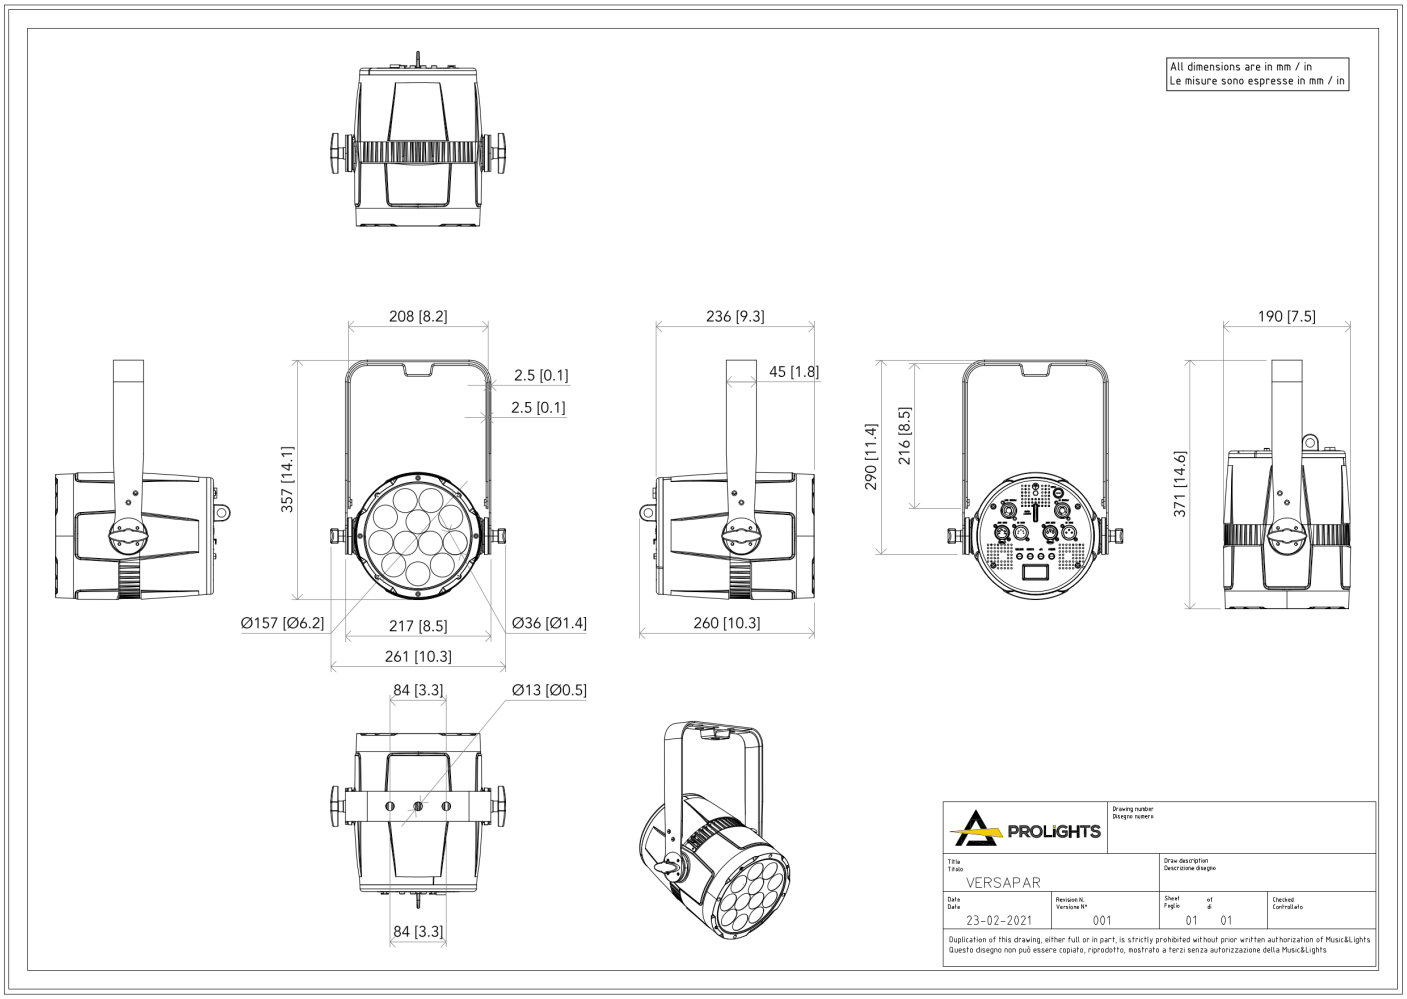


PHOTOMETRICS

Full On - Min Zoom

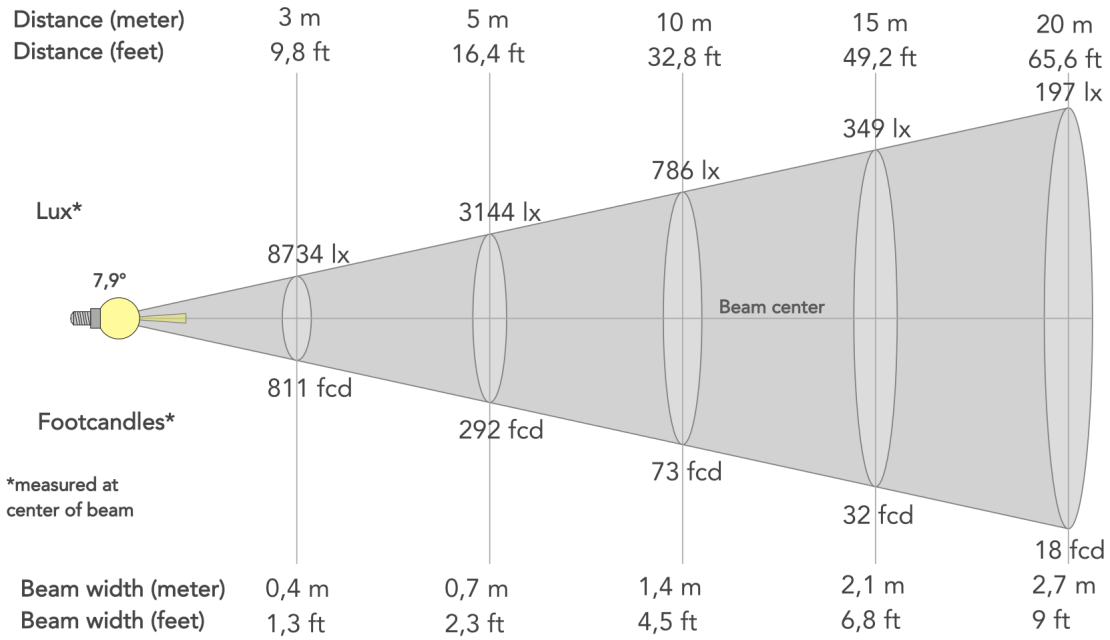

Beam angle (50%): **7.9°**	Field angle (10%): **11°**	Cut-off angle (2.5%): **14.1°**

Full On - Max Zoom

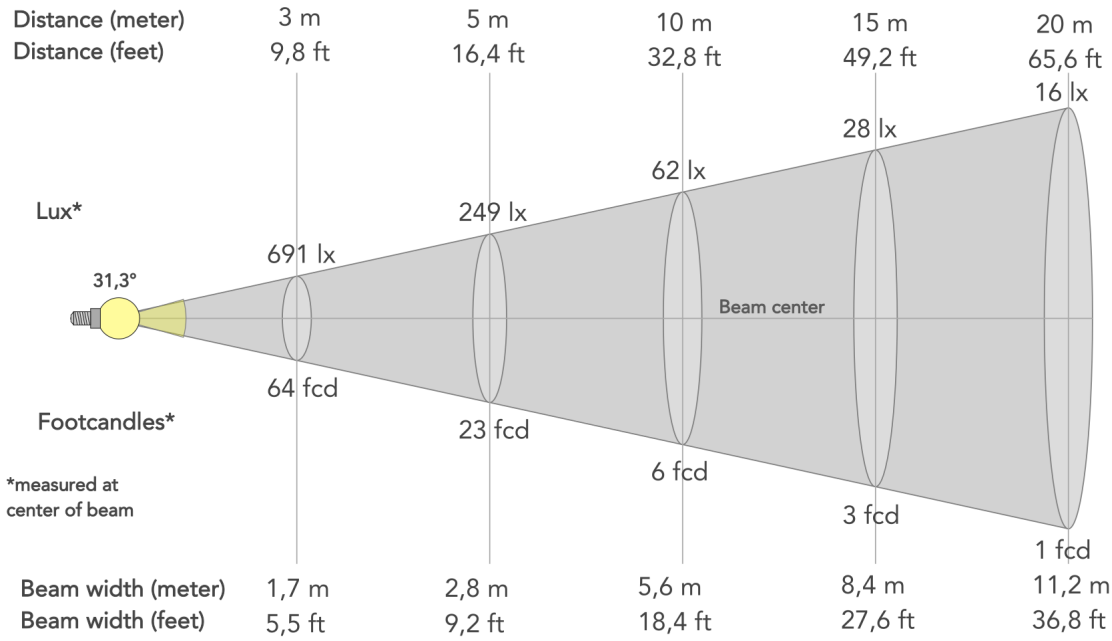

Beam angle (50%): **31.3°**	Field angle (10%): **48.9°**	Cut-off angle (2.5%): **61.4°**