
Smart Disk

ORDER CODE: SMARTDISK1

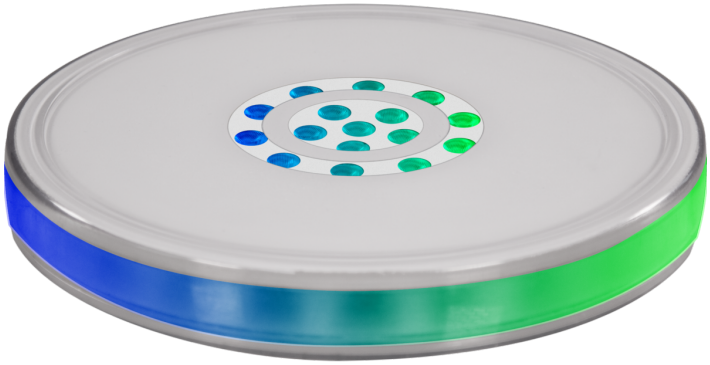

VERSIONS

	Code	SmartDisk	IRC	Case with recharger	Recharger
	**SMARTDISK1**	**1**	**1**	**No**	**1x1**
	SMARTDISKPACK	8	1	1	No

SOURCE

39x0,25W RGB + Warm White LEDs

IP RATING

IP54 for temporary outdoor use

WEIGHT

1,62kg / 3.57lbs

Downloaded on 18/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

Source:	39x0,25W RGB + Warm White LEDs
Source CCT:	2.800 K ~ 6.000K
Source life expectancy:	> 30.000 h

OPTICS

Beam angle:	360° to light up tables and 25° to light up objects on top

COLOUR SYSTEM

Macros:	several pre-built pixel macros with adjustable speed

DYNAMIC EFFECTS

FX generator:	adjustable foreground/background colour, index, speed, direction
Static mode:	selection of static colour
Manual mode:	manual adjustment of colour

CONTROL

Supported Protocols:	W-DMX
DMX channels:	4 / 8 / 17 / 165ch
Pixel control:	pixel2pixel control
Display:	LCD display
IR:	infrared sensor controlled by remote

ELECTRONICS

Dimmer:	linear 0 - 100% electronic dimmer
Dimmer curves:	selectable dimming modes available
Strobe / shutter:	1 - 30 Hz, electronic
Firmware upgrade with:	via DMX with UPBOX1U (not included)

BATTERY

Battery:	4,4 Ah - 11,1V lithium
Battery life in colour change mode up to:	15h
Battery life in single colour mode up to:	24h
Battery life in full-mode up to:	8h
Recharge connection:	power cable
Recharge time:	5h (max)
Battery level indicator:	shown on display

CONNECTIONS

Wireless Connection:	integrated W-DMX receiver
Data connection:	W-DMX receiver

ELECTRICAL

Max power consumption (230V):	19,9W

PHYSICAL

IP rating:	IP54 for temporary outdoor use
Housing:	Sturdy polycarbonate body
Finish:	white
Operating temperature:	Ta 0 to +45 °C (+32 to +113 °F)
Dimensions (WxHxD):	300x40x300mm
Weight:	1,62kg

CERTIFICATIONS / REPORTS

Compliance:	CE, UKCA, RCM

BOX CONTENT

1 x SMARTDISK

1 x PRL-IRC

1 x battery charger

Downloaded on 18/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

ACCESSORIES & RELATED PRODUCTS



AETHERBOXONE

IP65 1x universe CRMX transceiver, DMX, Ethernet protocols, Wi-Fi, Bluetooth, battery-ready, POE





PRL-IRC

RGBWA IR controller, 29 buttons, manual/static colours, auto programs, fade

Downloaded on 18/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice

TECHNICAL DRAWINGS

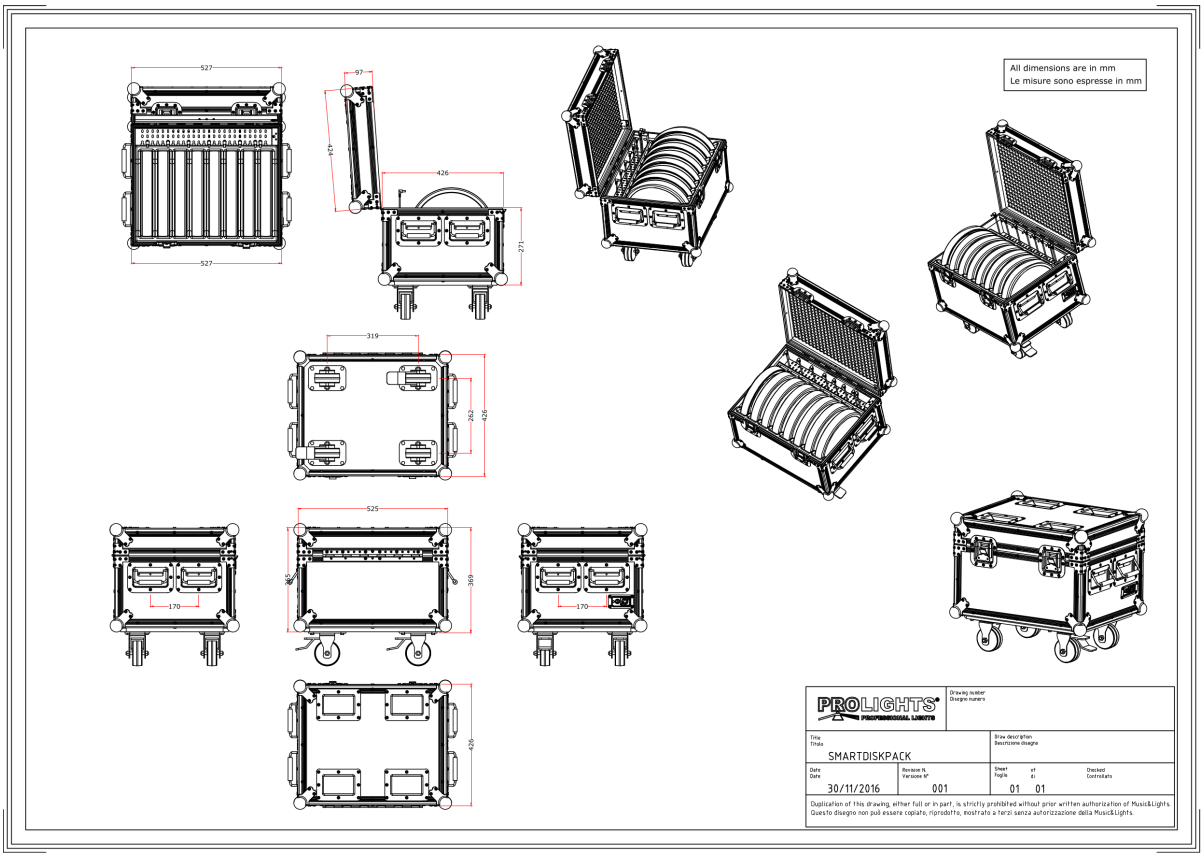

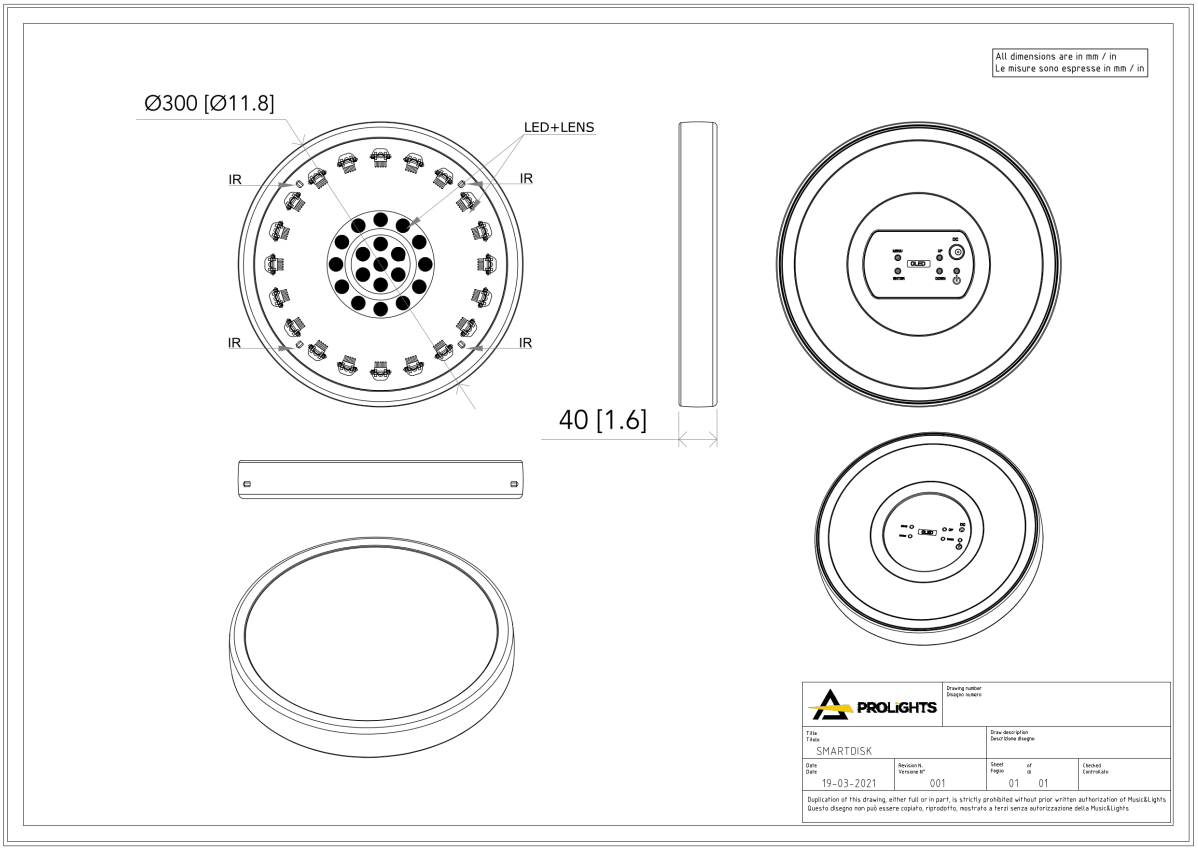

MUSIC & LIGHTS S.r.l.
Via A. Olivetti, snc
04026 - Minturno (LT) ITALY
info@prolights.it
Tel: +39 0771 72190
prolights.it
VAT No. IT 02057590594

Downloaded on 18/11/2026 - data may be provisional: features, specifications and appearance are subject to change without notice